


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L	REVISED PER ECN-25-338797	19AUG2025	SP	JG

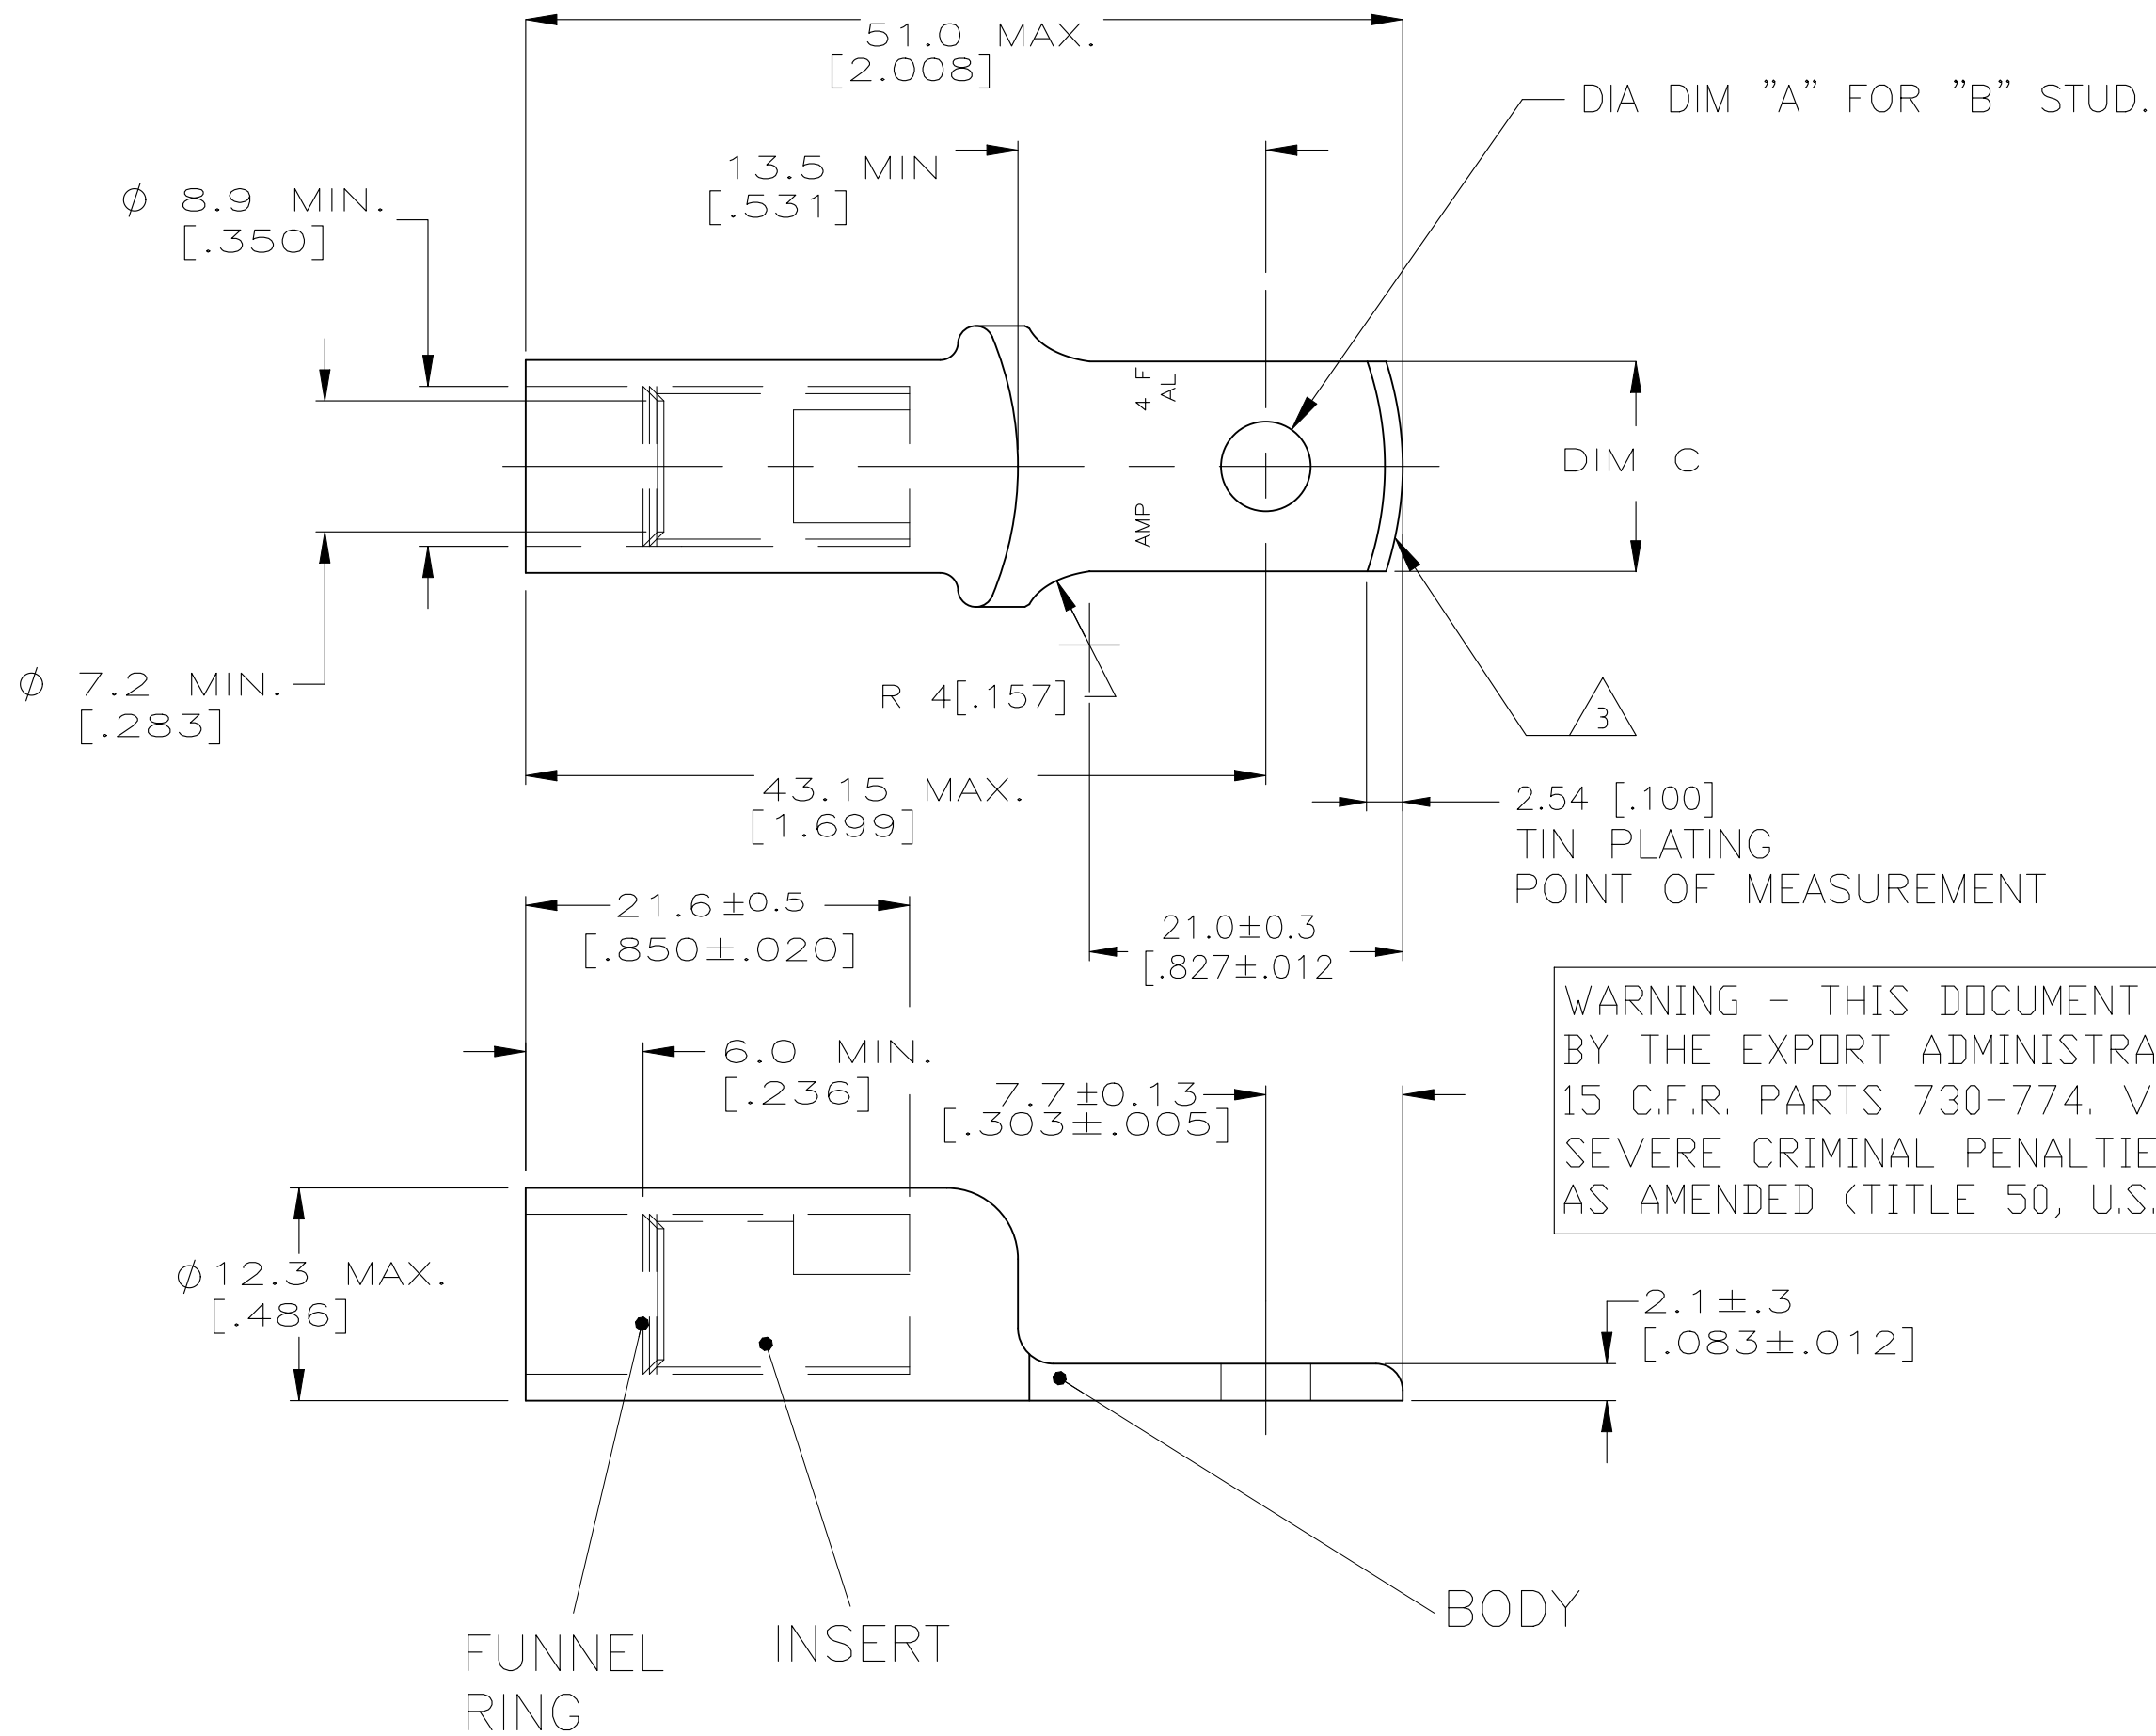

WARNING - THIS DOCUMENT CONTAINS TECHNOLOGY WHOSE EXPORT IS RESTRICTED BY THE EXPORT ADMINISTRATION REGULATIONS ("EAR") PURSUANT TO 15 C.F.R. PARTS 730-774. VIOLATIONS OF THE EAR ARE SUBJECT TO SEVERE CRIMINAL PENALTIES UNDER THE EXPORT CONTROL REFORM ACT, AS AMENDED (TITLE 50, U.S.C., SEC. 4801, ET SEQ.).

136059-2 AS SHOWN

- 1 WIRE INSULATION: 7.01-7.75 [.276-.305]
- 2 ALUMINUM WIRE CMA: 42331
WIRE: mm2: 21.4
- 3 THE TONGUE RADIUS FEATURE IS NOT A TOOLING CONTROLLED DIMENSION AND MAY NOT BE A TRUE RADIUS.
4. SEE TE CONNECTIVITY INSTRUCTION SHEET 408-2281 FOR TOOLING AND CRIMP INSTRUCTIONS, FIGURE 2 FOR WIRE STRIPPING DETAIL.

OBSOLETE

19.5 GRAMS	10 or M5	11.8 $\pm$ 0.13 [.464 $\pm$.005]	5.04+/-0.13 [.198 $\pm$.005]	BODY: COPPER ASTM-B187 ANNEALED TIN PLATE 0.00381[.000150] MIN THICK PER ASTM B 545	136059-2
21 GRAMS	10 or M5	15.8+0.13/-0.26 [.622+.005/-0.010]	5.04+/-0.13 [.198+/-0.005]	INSERT & FUNNEL: BRASS ASTM B36 NICKEL PLATE SAM AMS QQ-N-290A, DATED JULY 2000,.00254 [.000100] MIN THICK	136059-1
WEIGHT	B	DIM C	DIM A	MATERIAL & FINISH	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN JJ DESPRETZ 09/92 CHK G.ROBERT 16-JAN-97 APVD G.ROBERT 16-JAN-97 PRODUCT SPEC APPLICATION SPEC NAME	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm$ - 1 PLC $\pm$ - 2 PLC $\pm$ - 3 PLC $\pm$ - 4 PLC $\pm$ - ANGLES $\pm$ -		TE Connectivity	
MATERIAL VOIR TABLEAU		FINISH VOIR TABLEAU		TERMINAL, SEALED COPALUM WIRE SIZE: 4 AL	
WEIGHT 0.000000		SCALE 2:1		SHEET 1 OF 1	
CUSTOMER DRAWING		A2 00779		C=136059	
				RESTRICTED TO -	