




Terminals & Splices > PCB Terminals

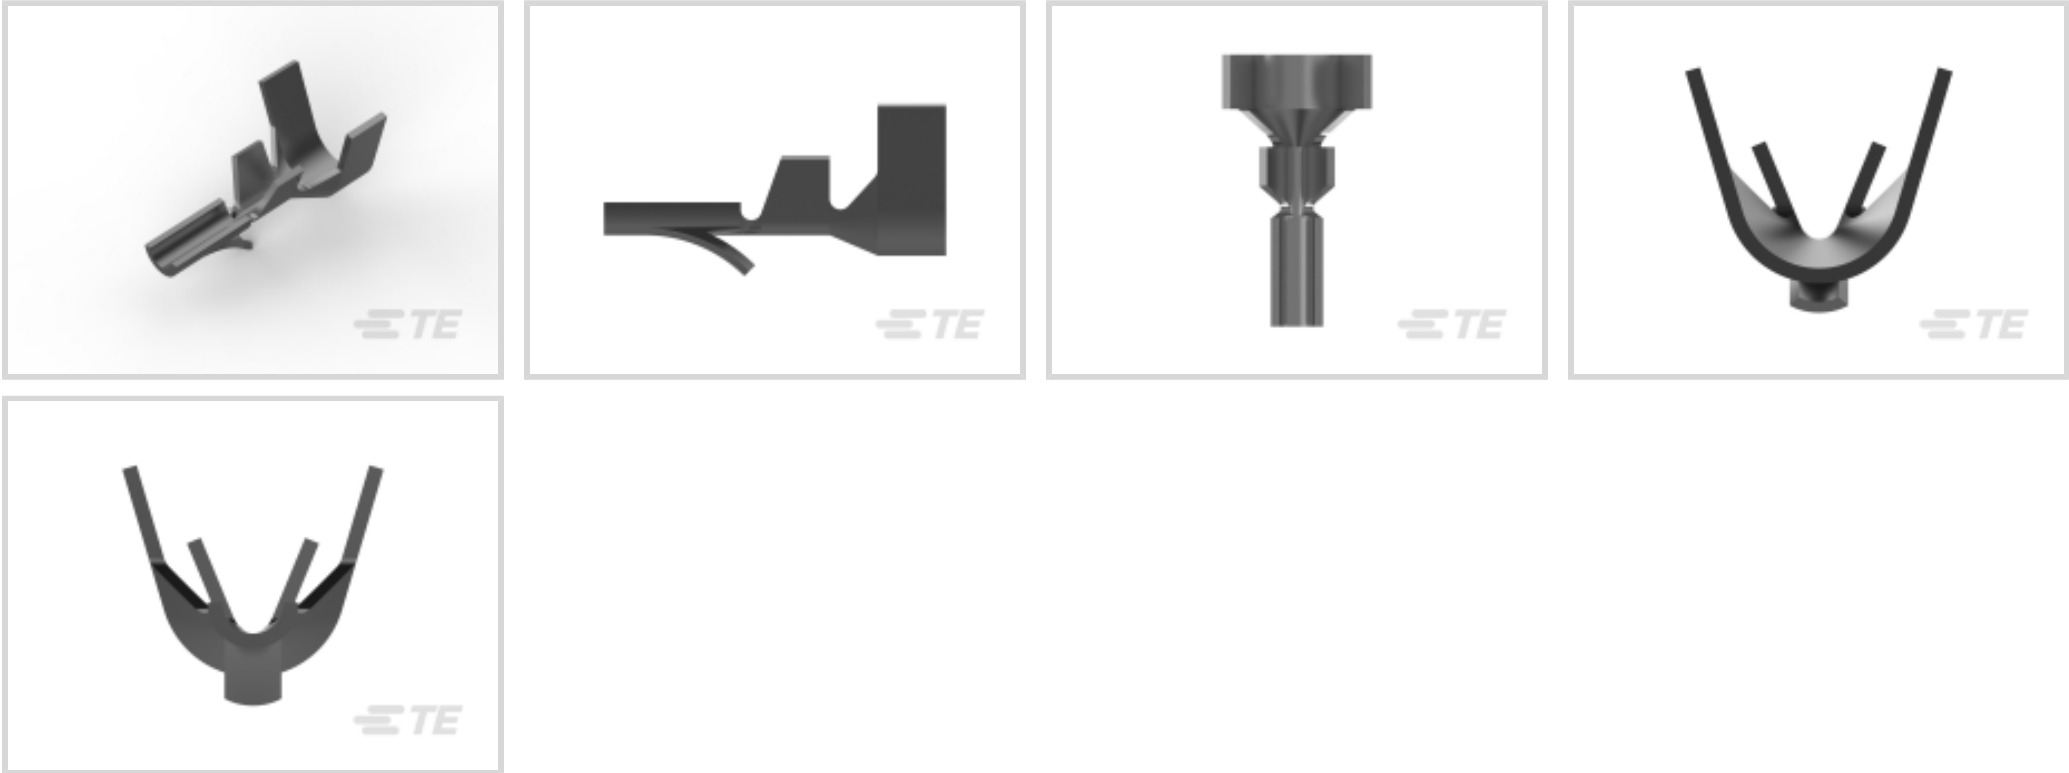

PCB Terminal Type: **PCB Pin**

PCB Thickness (Recommended): **1.57 mm [.062 in]**

PCB Hole Diameter: **1.4 mm [.055 in]**

Profile Height from PCB: **1.35 mm [.053 in]**

Compatible Insulation Diameter (Max): **2.54 mm [.1 in]**

Features

Product Type Features

Terminal Features	Stud Hole
-------------------	-----------

Contact Features

Terminal Plating Finish	Bright
Contact Mating Area Plating Material Thickness	5.08 µm[200 µin]
PCB Terminal Type	PCB Pin
Terminal Plating Material	Pre-Tin
Terminal Size	Miniature
Terminal Orientation	Straight

Termination Features

Termination Method to PCB	Through Hole - Solder
Product Terminates To	Printed Circuit Board

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions



Extension Below Board	3.43 mm[.135 in]
PCB Thickness (Recommended)	1.57 mm[.062 in]
PCB Hole Diameter	1.4 mm[.055 in]
Profile Height from PCB	1.35 mm[.053 in]
Compatible Insulation Diameter (Max)	2.54 mm[.1 in]
Compatible Insulation Diameter Range	1.52 – 2.54 mm[.06 – .1 in]
Wire Size	.12 – .4 mm²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]

Packaging Features

Packaging Quantity	10000
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

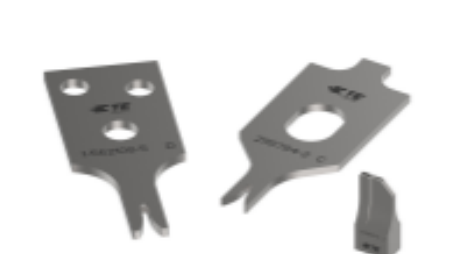

KIT

REPRESENTATION ONLY

TE Part # 7-2266763-7
[OCEAN_2.0_SPARE_PART_KIT-042F110F](#)



TE Part # 3-42642-3
[AMP-IN TERM IS 22-20 010PTBR](#)



TE Part # 2266763-1
[OCEAN_2.0_APPLICATOR-S-042F110F-RSM](#)



TE Part # 2305570-1
[Strip Terminal Cutter-Side Feed-No Crimp](#)



TE Part # 172020-1
[13P MINI AMPIN HEADER HSG](#)



TE Part # 2266763-2
[OCEAN_2.0_APPLICATOR-S-042F110F-RSA](#)


Customers Also Bought



TE Part #2-34160-1
[TERMINAL,PG R 16-14 8, TAPE](#)



TE Part #60573-1
[187 FASTON REC 24-20 TPBR](#)

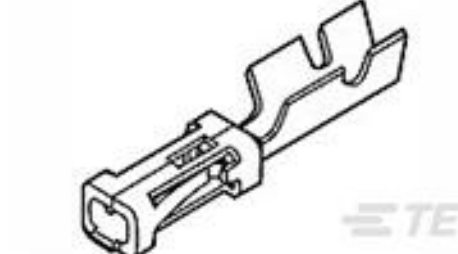

TE Part #5-103171-4
[MOD IV RECP PLTD 30 DPLX LF](#)



TE Part #5-520315-9
[TRIOMATE ASSY V 9P L=3.556LDFR](#)



TE Part #640254-1
[KEYING PLUG .045 SQ PST CONN](#)



TE Part #1-640388-2
[12P MTA156 HDR ASSY RN STR F/L](#)



TE Part #1717109-1
[0.64 III 16POS PLUG ASSY](#)



TE Part #1-2132782-2
[12 pos. EP II breakaway retain](#)



Documents

Product Drawings

AMP-IN, MINI 26-22 008PTLPHBZ

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-640108-1_U.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-640108-1_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-640108-1_U.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_3-640108-1_N.3d_igs.zip

English

Customer View Model

ENG_CVM_3-640108-1_N.3d_stp.zip

English

Customer View Model

ENG_CVM_3-640108-1_N.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS

English

Product Specifications

Application Specification

English

3-640108-1

PCB Pin PCB Terminal, 1.4 mm [.055 in] PCB Hole, 26 – 22 AWG, .12 – .4 mm² Wire,
Through Hole - Solder, Pre-Tin Plating, Box

