

1SNK705022R0000

✓ ACTIVE

ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK705022R0000

PI-Spring Terminal Block, Feed-Through, Blue, 5.2 mm [.205 in]


Spacing, 4 Position, Spring Terminal, Power & Signal, DIN Rail, 600

VAC, ENTRELEC SNK

[View on TE.com >](#)



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks

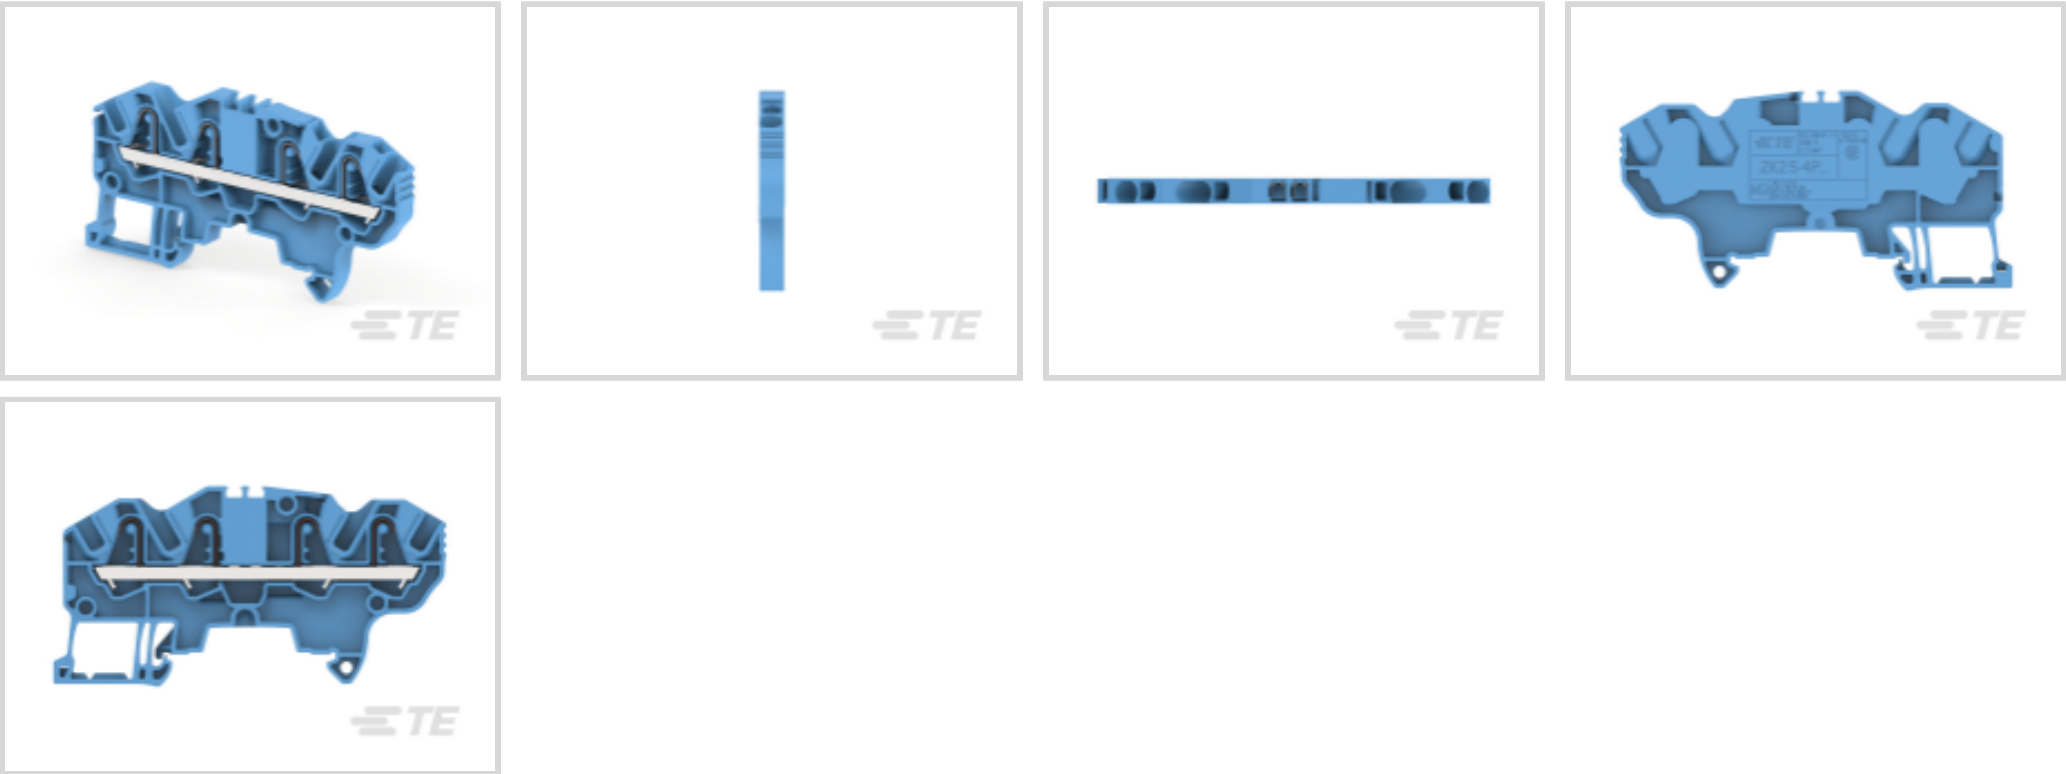

Block Function: **Feed-Through**
Modular Terminal Block Product Type: **PI-Spring Terminal Block**
Primary Product Color: **Blue**
Product Spacing: **5.2 mm [.205 in]**
Number of Positions: **4**

Features

Product Type Features

Modular Terminal Block Product Type	PI-Spring Terminal Block
-------------------------------------	--------------------------

Configuration Features

Number of Levels	1
Gauge Type	A2 / 2.3 mm Dia.
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	4

Electrical Characteristics

Power Loss	1 W
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (IEC)	24 A
Current Rating (UL)	20 A
Current Rating (CSA)	20 A



Dielectric Withstanding Voltage (Max)	2200 V
Voltage Rating (IEC)	1000 V
Voltage Rating (CSA)	600 V
Short-Time Withstanding Current Rating @ 1s	300 A
Operating Voltage	600 VAC

Body Features

Product Weight	9 g[.317 oz]
Primary Product Color	Blue

Termination Features

Termination Method to Wire & Cable	Spring Terminal
------------------------------------	-----------------

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Main Circuit Capacity - Twin Ferrule per Spring Clamp	26 – 20 AWG
Product Depth	40.2 mm[1.583 in]
Tool Size	3.5 mm[.138 in]
Wire Stripping Length	11 mm[.433 in]
Main Circuit Capacity - 1 Rigid Stranded Conductor per Spring Clamp	26 – 12 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Spring Clamp	26 – 14 AWG
Main Circuit Capacity - 1 Insulated Ferrule per Spring Clamp	26 – 14 AWG
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 2.5 mm ²
Product Length	40.2 mm[1.583 in]
Product Height	80.2 mm[3.157 in]
Product Spacing	5.2 mm[.205 in]
Wire Size	12 AWG

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]



Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>





EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

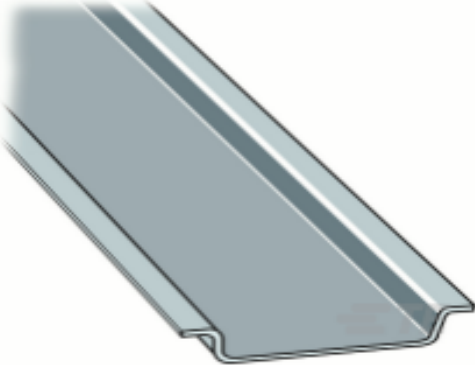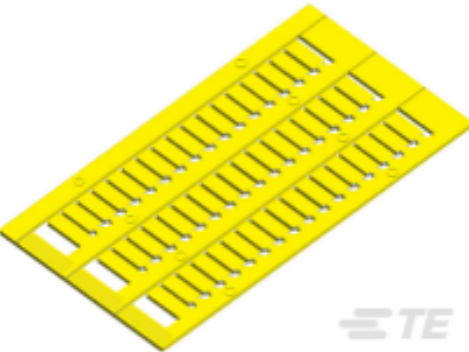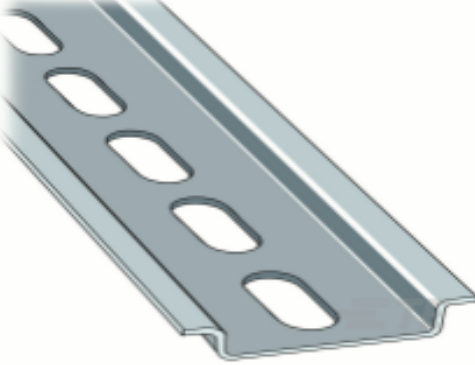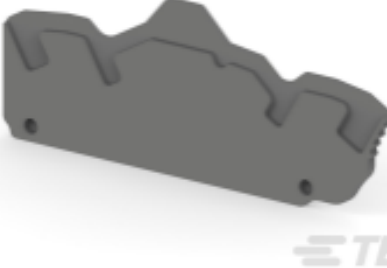

 TE Part # 1SNK900659R0000 TO3.5-50-A	 TE Part # 1SNK140000R0000 MC512	 TE Part # 1SNK900203R0000 TP2	 TE Part # 1SNA178529R0400 PR50
 TE Part # 1SNK900403R0000 PG5-R2	 TE Part # 1SNA174300R1700 PR3.Z2	 TE Part # 1SNK905303R0000 JB5-3	 TE Part # 1SNK905302R0000 JB5-2
 TE Part # 1SNK140004R0000 MC512-YL	 TE Part # 1SNK900201R0000 TC5-R1	 TE Part # 1SNK900611R0000 UMH	 TE Part # 1SNK900002R0000 BAZ1
 TE Part # 1SNK905304R0000 JB5-4	 TE Part # 1SNK905305R0000 JB5-5	 TE Part # 1SNK900107R0000 CS-R3	 TE Part # 1SNK900200R0000 TC5
 TE Part # 1SNK905310R0000 JB5-10	 TE Part # 1SNA173220R0500 PR30	 TE Part # 1SNK705912R0000 EK2.5-4P	 TE Part # 1SNK905350R0000 JB5-50


Also in the Series | ENTRELEC SNK

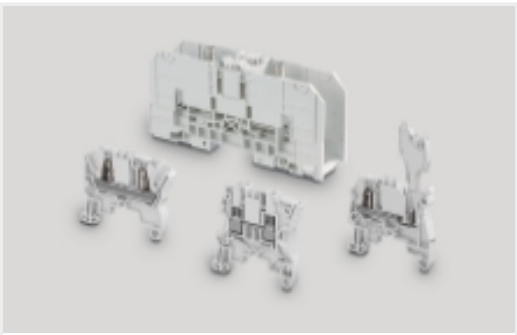

Modular Terminal Blocks(319)



Terminal Block & Strip Conducting Accessories(67)

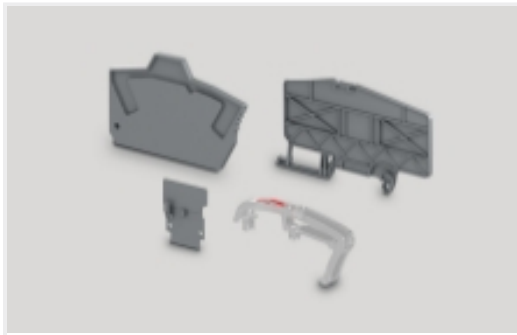

Terminal Block & Strip Insulating Accessories(31)

Customers Also Bought




TE Part #1SNK705210R0000
ZK2.5-D2



TE Part #1SNK705961R0000
EK2.5-T3



TE Part #T0931000423-000
CODING-PIN-M3-TM

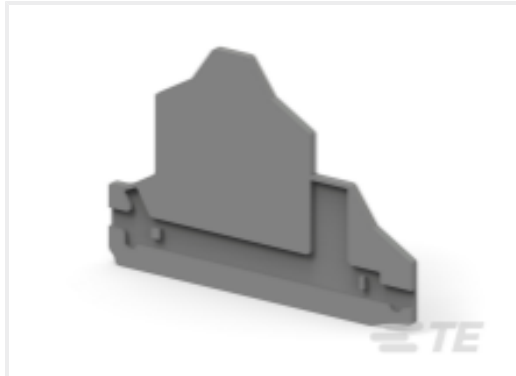

TE Part #1SNK705960R0000
EK2.5-D2



TE Part #1SNK705910R0000
EK2.5



TE Part #1SNK706150R0000
ZK4-PE



TE Part #T0931006524-000
CODING-PIN-M3-TF



TE Part #1SNK508412R0000
ZS4-SF1-R1



TE Part #1SNK705513R0000
ZK2.5-L-N-PE



TE Part #1SNK705010R0000
ZK2.5

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK705022R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK705022R0000_A.3d_igs.zip

1SNK705022R0000

PI-Spring Terminal Block, Feed-Through, Blue, 5.2 mm [.205 in] Spacing, 4 Position, Spring Terminal, Power & Signal, DIN Rail, 600 VAC, ENTRELEC SNK



English

Customer View Model

ENG_CVM_CVM_1SNK705022R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ZK2.5-4P-BL

English

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

English

Essential Entrelec Terminal Blocks

Japanese

Agency Approvals

Bureau Veritas Marine and Offshore Certificate

English