



intercontec
products

Kontaktbuchse 0,6mm

**Einsatzbereich: -M17
-M12**

**TE Teile Nr.: 60-0463-013-P00
IC Ref. Nr.: 60.463.13**

Elektrische Werte

Bemessungsstrom max. 1,2 A
Durchgangswiderstand < 15 mOhm

Werkstoff

Kontakt Messing, vergoldet

Anschluss


Anschlussart crimp
Anschlussbereich 0,14 - 0,5 mm²
Abisolierlänge 4 mm
Crimpeinstellungen sind individuell zu wählen

Mechanische Werte

Steckzyklen 500
Kontaktrückhaltekräfte > 35 N
Kontaktsteck- und ziehkräfte 0,5 N - 2,5 N

Werkzeuge (nicht im Lieferumfang enthalten)

digitale Crimpzange Best.-Nr.: C0.101.00
Locator für digitale Crimpzange Best.-Nr.: C0.389.00

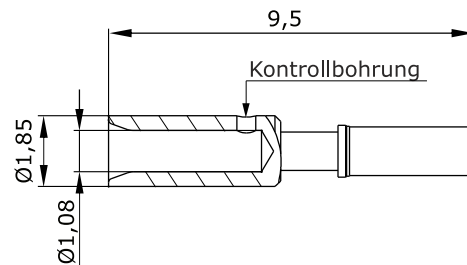

Hauptabmessungen
Kontaktbuchse





intercontec
products

Contact Socket 0.6mm

for: -M17
-M12

TE part number: 60-0463-013-P00
IC reference number: 60.463.13

Electrical Data

rated current max. 1.2 A
contact resistance < 15 mOhm

Material

contact brass, gold plated

Termination


kind of termination crimp
cross-section 0.14 - 0.5mm²
stripping length 4 mm
crimp settings select individually

Mechanical Data

mating cycles 500
contact retention force > 35 N
insertion- and extraction force 0.5 N - 2.5 N

Tools (not part of product contents)

digital crimping tool order code: C0.101.00
locator for digital crimping tool order code: C0.389.00

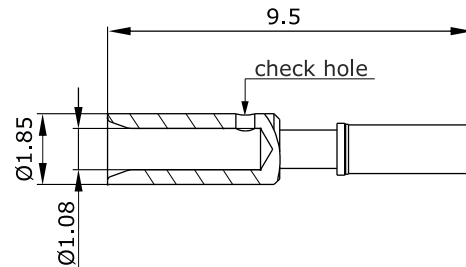

Main Dimensions
contact socket

