


FEATURES	
- Surface Mount (SMT) Tantalum Capacitors - Meets or Exceeds EIA 535 BAAC and IECQ standards (QC300801/US001, IS-28) - Capacitance range: 0.1µF to 1500µF - Voltage range: 4 to 50 WVDC - Down sized, extended range values - Low profile sizes: XL, AL, BL, CL, DL - Surge tested for maximum robustness - Operating Temperature range -55°C to +125°C	- Precision molded case with flat surfaces for vacuum pick-up - Laser marking and bold videcon – readable polarity - Compliant terminations - Glue pad on underside for bonding to circuit board prior to soldering - Encapsulant material satisfies the UL 94 V0 flammability classification - MSL (moisture sensitivity level) per IPC/Jedec J-STD-020B is level 1





PART NUMBERING GUIDE	
SERIES TYPE → PCT 10 / 35 D K (optional) ← OPTIONAL CAPACITANCE in microfarads (µF) Ex. 0.68µF would be .68 VOLTAGE 4 6(6.3) 10 16 20 25 35 50 TOLERANCE M = (±20%) K = (±10%) CASE SIZE A (3216-18) B (3528-21) C (6032-28) D (7343-31) H (7343-43) Z (7361-38) XL (2012-12) Low Profile AL (3216-12) Low Profile BL (3528-12) Low Profile CL (6032-15) Low Profile DL (7343-20) Low Profile	

ELECTRICAL SPECIFICATION	
Technical Data:	All technical data relate to an ambient temperature of +25°C
Capacitance Range	0.10µF to 1500µF
Capacitance Tolerance	±10% (K); ±20% (M)
Rated Voltage DC (V _R)	≤+85°C
Category Voltage DC (V _C)	≤+125°C
Surge Voltage (V _S)	≤+85°C
Surge Voltage (V _S)	≤+125°C
Temperature Range	-55°C to +125°C with 2/3 V _R (linear derating) required for operation above +85°C
Reliability	Level M (1% per 1000 hours at rated voltage (V _R), rated temperature (85°C) and 0.1Ω/volt circuit impedance.
Qualifications	Fixed Tantalum Specifications: EIA 525BAAC and IECQ standards (QC300801/US001, IS-28) Solder-ability: Sn Plated Terminations – meets requirements of IEC 68 2.20 test Ta and MIL-STD-202, Method 208 MSL (moisture sensitivity level): Level 1 of IPC/Jedec J-STD-020B

CASE SIZE CROSS REFERENCE: CAPACITANCE AND VOLTAGE RATING (Rated Voltage DC@ 85°C)									
Cap (µF)	4V	6.3V	10V	16V	20V	25V	35V	50V	
0.10	A, AL, XL	A, AL, XL	A, AL, XL	A, AL, XL	A, AL, XL	A, AL, XL	A, AL, XL	A, AL	
0.15	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B	
0.22	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B, XL	A, AL, B	
0.33	A, AL, BL, XL	A, AL, BL, XL	A, AL, BL, XL	A, AL, BL, XL	A, AL, BL, XL	A, AL, BL, XL	A, AL, BL, XL	A, AL, BL	
0.47	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C	
0.68	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C XL	A, AL, B, BL, C	
1.0	A, AL, B, BL, C, XL	A, AL, B, BL, C, XL	A, AL, B, BL, C, XL	A, AL, B, BL, C, XL	A, AL, B, BL, C, XL	A, AL, B, BL, C, XL	A, AL, B, BL, C, XL	A, AL, B, BL, C, XL	
1.5	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	
2.2	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	A, AL, B, BL, C, D, XL	
3.3	A, AL, B, BL, C, CL, D, DL, XL	A, AL, B, BL, C, CL, D, DL, XL	A, AL, B, BL, C, CL, D, DL, XL	A, AL, B, BL, C, CL, D, DL, XL	A, AL, B, BL, C, CL, D, DL, XL	A, AL, B, BL, C, CL, D, DL, XL	A, AL, B, BL, C, CL, D, DL, XL	A, AL, B, BL, C, CL, D, DL, XL	
4.7	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	
6.8	A, AL, B, BL, C, D, DL, XL	A, AL, B, BL, C, D, DL, XL	A, AL, B, BL, C, D, DL, XL	A, AL, B, BL, C, D, DL, XL	A, AL, B, BL, C, D, DL, XL	A, AL, B, BL, C, D, DL, XL	A, AL, B, BL, C, D, DL, XL	A, AL, B, BL, C, D, DL, XL	
10.0	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	
15.0	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	A, AL, B, BL, C, CL, D, DL, H, XL	
22.0	A, AL, B, BL, C, CL, D, DL, H, Z, XL	A, AL, B, BL, C, CL, D, DL, H, Z, XL	A, AL, B, BL, C, CL, D, DL, H, Z, XL	A, AL, B, BL, C, CL, D, DL, H, Z, XL	A, AL, B, BL, C, CL, D, DL, H, Z, XL	A, AL, B, BL, C, CL, D, DL, H, Z, XL	A, AL, B, BL, C, CL, D, DL, H, Z, XL	A, AL, B, BL, C, CL, D, DL, H, Z, XL	
33.0	A, AL, BL, C, CL, D, DL, H, Z	A, AL, BL, C, CL, D, DL, H, Z	A, AL, BL, C, CL, D, DL, H, Z	A, AL, BL, C, CL, D, DL, H, Z	A, AL, BL, C, CL, D, DL, H, Z	A, AL, BL, C, CL, D, DL, H, Z	A, AL, BL, C, CL, D, DL, H, Z	A, AL, BL, C, CL, D, DL, H, Z	
47.0	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	
68.0	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	
100.0	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	A, B, BL, C, CL, D, DL, H, Z	
150.0	B, C, CL, D, DL, H, Z	B, C, CL, D, DL, H, Z	B, C, CL, D, DL, H, Z	B, C, CL, D, DL, H, Z	B, C, CL, D, DL, H, Z	B, C, CL, D, DL, H, Z	B, C, CL, D, DL, H, Z	B, C, CL, D, DL, H, Z	
220.0	B, C, CL, D, DL, H	B, C, CL, D, DL, H	B, C, CL, D, DL, H	B, C, CL, D, DL, H	B, C, CL, D, DL, H	B, C, CL, D, DL, H	B, C, CL, D, DL, H	B, C, CL, D, DL, H	
330.0	C, D, DL, H, J	C, D, DL, H, J	C, D, DL, H, J	C, D, DL, H, J	C, D, DL, H, J	C, D, DL, H, J	C, D, DL, H, J	C, D, DL, H, J	
470.0	C, D, DL, H	C, D, DL, H	C, D, DL, H	C, D, DL, H	C, D, DL, H	C, D, DL, H	C, D, DL, H	C, D, DL, H	
680.0	D, DL, H	D, DL, H	D, DL, H	D, DL, H	D, DL, H	D, DL, H	D, DL, H	D, DL, H	
1000.0	D, H, Z	D, H, Z	D, H, Z	D, H, Z	D, H, Z	D, H, Z	D, H, Z	D, H, Z	
1500.0	H	H	H	H	H	H	H	H	

OUTLINE DRAWING AND PAD PRINT

TAPE AND REEL DIMENSION

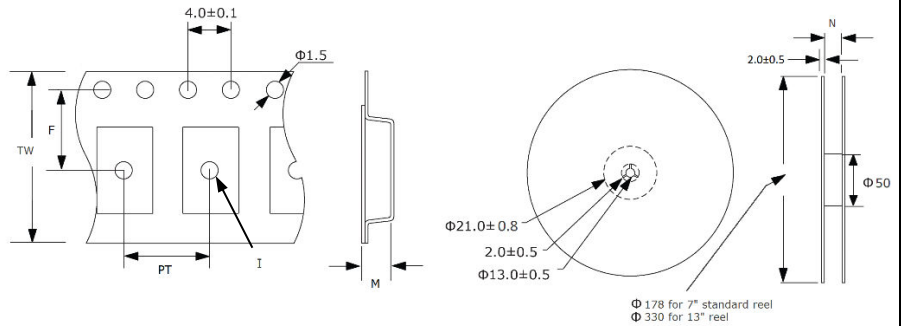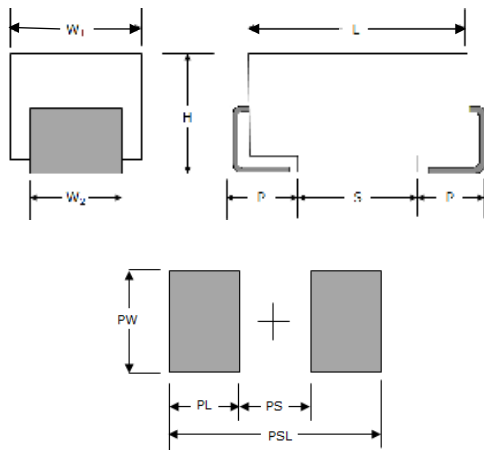


(3) 0805 Footprint Compatible
(4) 1206 Footprint Compatible
NOTE: Dimensions in millimeters (mm)

NEMCO Size	EIA Size	L ±0.2	W1 ±0.2	H ±0.3	W2 ±0.1	P ±0.3	S Min.	PSL	PL	PS	PW	TW ±0.3	PT (Pitch)	M (MAX)	I	N ±1	F ±0.05
A(4)	3216-18	3.2	1.6	1.6	1.2	0.8	1.10	3.8	1.4	1.0	1.8	8	4	2.3	1.0	9.5	3.5
B	3528-21	3.5	2.8	1.9	2.2	0.8	1.40	4.0	1.4	1.2	2.8	8	4	2.6	1.0	9.5	3.5
C	6032-28	6.0	3.2	2.5	2.2	1.3	2.90	6.5	2.0	2.5	2.8	12	8	3.3	1.5	13	5.5
D	7343-31	7.3	4.3	2.8	2.4	1.3	4.40	8.0	2.0	4.0	3.0	12	8	3.6	1.5	13	5.5
H	7343-43	7.3	4.3	4.1	2.4	1.3	4.40	8.0	2.0	4.0	3.0	12	8	4.8	1.5	13	5.5
Z	7361-38	7.3	6.1	3.45	3.1	1.4	4.40	8.0	2.0	4.0	3.7	12	8	4.8	1.5	13	5.5
XL(3)	2012-12	2.05	1.3	1.2	1.2	0.5	0.85	2.7	1.0	0.8	1.6	8	4	1.9	1.0	9.5	3.5
AL(4)	3216-12	3.2	1.6	1.2	1.2	0.8	1.10	3.8	1.4	1.0	1.8	8	4	1.9	1.0	9.5	3.5
BL	3528-12	3.5	2.8	1.2	2.2	0.8	1.40	4.0	1.4	1.2	2.8	8	4	1.9	1.0	9.5	3.5
CL	6032-15	6.0	3.2	1.5	2.2	1.3	2.90	6.5	2.0	2.5	2.8	8	4	1.9	1.0	9.5	3.5
DL	7343-20	7.3	4.3	2.0	2.4	1.3	4.40	8.0	2.0	4.0	3.0	8	4	1.7	1.0	9.5	3.5

REFLOW PROFILE

MARKING

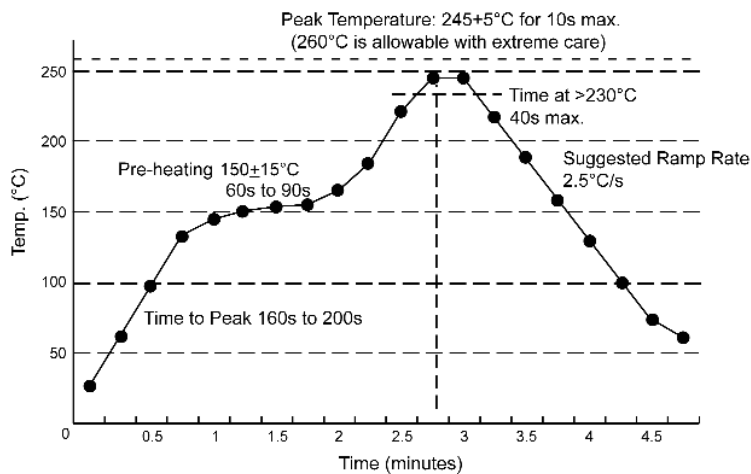


Tantalum capacitors are lead-free system compatible system components, meeting the requirements of J-STD-020 standard. Maximum peak temperature 260°C for 10 seconds maximum, 3 reflow cycles.

There are several important general soldering considerations for tantalum capacitors.


- Soldering temperature and time should be the minimum for a good connection.
- Recommended soldering profiles are designed to insure that the temperature of the internal construction of the capacitors does not exceed +220°C.
- Positioning capacitors near components radiating heat such as power transistors should be avoided.
- Allow for an increase to ESR ratings of 1.25 x catalog limit post PCB assembly.

Case Sizes: XL, A, AL, B, BL

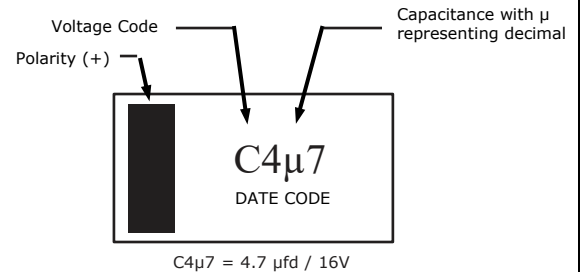

C4μ7 = 4.7 μf / 16V

Case Sizes: C, CL, D, DL, H, Z

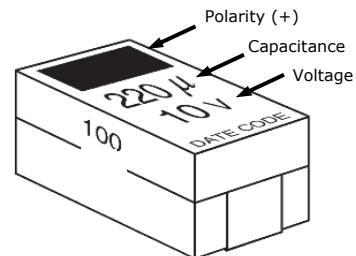

NEMCO reserves the right to supply a higher voltage rating,

Voltage VDC	4V	6.3V	10V	16V	20V	25V	35V	50V
Voltage Code	G	J	A	C	D	E	V	T

tighter tolerance and/or lower ESR in the same case size, to the same reliability standards.

RATINGS AND PART NUMBER REFERENCE

4 V DC @ 85°C (2.7 V DC @ 125°C)					
Capacitance (μF)	Case Size	Nemco Part No.	DCL (μA) max	tan δ max. (%)	ESR @ 100kHz max. (Ω)
2.2	AL	PCT2.2 / 4AL _	0.5	6	25.0
2.2	XL	PCT2.2 / 4XL _	0.5	6	25.0
3.3	AL	PCT3.3 / 4AL _	0.5	6	18.0
3.3	XL	PCT3.3 / 4XL _	0.5	6	20.0
4.7	AL	PCT4.7 / 4AL _	0.5	6	10.0
4.7	XL	PCT4.7 / 4XL _	0.5	6	12.0
6.8	AL	PCT6.8 / 4AL _	0.5	6	8.0
6.8	BL	PCT6.8 / 4BL _	0.5	6	6.0
6.8	XL	PCT6.8 / 4XL _	0.5	6	5.2
10.0	AL	PCT10 / 4AL _	0.5	6	6.0
10.0	BL	PCT10 / 4BL _	0.6	6	5.0
10.0	XL	PCT10 / 4XL _	0.5	6	7.0
15.0	AL	PCT15 / 4AL _	0.6	8	4.0
15.0	BL	PCT15 / 4BL _	0.6	6	2.0
15.0	XL	PCT15 / 4XL _	0.6	8	4.0
22.0	AL	PCT22 / 4AL _	0.9	8	3.5
22.0	BL	PCT22 / 4BL _	0.9	6	1.9
22.0	XL	PCT22 / 4XL _	0.9	8	3.8
33.0	A	PCT33 / 4A _	1.3	6	3.0
33.0	AL	PCT33 / 4AL _	1.3	8	1.7
33.0	BL	PCT33 / 4BL _	1.3	6	1.7
33.0	CL	PCT33 / 4CL _	1.3	6	0.6
47.0	A	PCT47 / 4A _	1.9	8	2.6
47.0	BL	PCT47 / 4BL _	1.9	10	2.0
47.0	CL	PCT47 / 4CL _	1.9	6	0.5
68.0	A	PCT68 / 4A _	2.7	10	1.5
68.0	B	PCT68 / 4B _	2.7	6	1.8
68.0	BL	PCT68 / 4BL _	2.7	15	1.5
68.0	CL	PCT68 / 4CL _	2.7	6	0.4
100.0	A	PCT100 / 4A _	4.0	30	1.4
100.0	B	PCT100 / 4B _	4.0	8	0.9
100.0	BL	PCT100 / 4BL _	4.0	14	1.4
100.0	CL	PCT100 / 4CL _	4.0	6	1.3
150.0	B	PCT150 / 4B _	6.0	10	1.5
150.0	C	PCT150 / 4C _	6.0	6	0.3
150.0	CL	PCT150 / 4CL _	6.0	6	1.3
150.0	DL	PCT150 / 4DL _	6.0	6	0.4
220.0	B	PCT220 / 4B _	8.8	12	1.1
220.0	C	PCT220 / 4C _	8.8	8	1.2
220.0	CL	PCT220 / 4CL _	8.8	8	1.2
220.0	D	PCT220 / 4D _	8.8	8	0.9
220.0	DL	PCT220 / 4DL _	8.8	8	0.3
330.0	C	PCT330 / 4C _	13.2	8	0.3
330.0	D	PCT330 / 4D _	13.2	8	0.9
330.0	DL	PCT330 / 4DL _	13.2	12	0.4
470.0	C	PCT470 / 4C _	18.8	14	0.3
470.0	D	PCT470 / 4D _	18.8	12	0.9
470.0	DL	PCT470 / 4DL _	18.8	14	0.9
470.0	H	PCT470 / 4H _	18.8	10	0.5
680.0	D	PCT680 / 4D _	27.2	14	0.5
680.0	DL	PCT680 / 4DL _	27.2	25	0.2
680.0	H	PCT680 / 4H _	27.2	14	0.9
1000.0	D	PCT1000 / 4D _	40.0	60	0.2
1000.0	H	PCT1000 / 4H _	40.0	14	0.4
1500.0	H	PCT1500 / 4H _	60.0	30	0.2

6.3 V DC @ 85°C (4 V DC @ 125°C)					
Capacitance (μF)	Case Size	Nemco Part No.	DCL (μA) max	tan δ max. (%)	ESR @ 100kHz max. (Ω)
1.5	AL	PCT1.5 / 6AL _	0.5	6	25.0
1.5	XL	PCT1.5 / 6XL _	0.5	6	25.0
2.2	AL	PCT2.2 / 6AL _	0.5	6	18.0
2.2	XL	PCT2.2 / 6XL _	0.5	6	20.0
3.3	AL	PCT3.3 / 6AL _	0.5	6	9.0
3.3	XL	PCT3.3 / 6XL _	0.5	6	12.0
4.7	AL	PCT4.7 / 6AL _	0.5	6	7.5
4.7	BL	PCT4.7 / 6BL _	0.5	6	6.0
4.7	XL	PCT4.7 / 6XL _	0.5	6	7.0
6.8	AL	PCT6.8 / 6AL _	0.5	6	2.6
6.8	BL	PCT6.8 / 6BL _	0.5	6	5.0
6.8	XL	PCT6.8 / 6XL _	0.5	8	7.0
10.0	A	PCT10 / 6A _	0.6	6	4.0
10.0	AL	PCT10 / 6AL _	0.6	8	4.0
10.0	BL	PCT10 / 6BL _	0.6	6	4.0
10.0	XL	PCT10 / 6XL _	0.6	8	6.0
15.0	A	PCT15 / 6A _	0.9	6	3.5
15.0	AL	PCT15 / 6AL _	0.9	8	4.0
15.0	B	PCT15 / 6B _	1.0	6	2.5
15.0	BL	PCT15 / 6BL _	1.0	6	3.5
15.0	XL	PCT15 / 6XL _	0.9	8	4.1
22.0	A	PCT22 / 6A _	1.4	6	3.0
22.0	AL	PCT22 / 6AL _	1.3	10	1.8
22.0	B	PCT22 / 6B _	1.4	6	2.5
22.0	BL	PCT22 / 6BL _	1.4	8	2.5
22.0	CL	PCT22 / 6CL _	1.3	6	0.6
33.0	A	PCT33 / 6A _	2.1	8	3.2
33.0	B	PCT33 / 6B _	2.1	6	2.2
33.0	BL	PCT33 / 6BL _	2.1	10	2.5
33.0	C	PCT33 / 6C _	2.1	6	1.8
33.0	CL	PCT33 / 6CL _	2.1	6	1.8
47.0	A	PCT47 / 6A _	2.8	10	1.6
47.0	B	PCT47 / 6B _	3.0	6	2.0
47.0	BL	PCT47 / 6BL _	2.8	10	1.6
47.0	C	PCT47 / 6C _	3.0	6	1.6
47.0	CL	PCT47 / 6CL _	3.0	6	1.5
68.0	B	PCT68 / 6B _	4.0	8	0.9
68.0	C	PCT68 / 6C _	4.3	6	1.5
68.0	CL	PCT68 / 6CL _	4.3	6	1.5
68.0	D	PCT68 / 6D _	4.3	6	0.9
100.0	B	PCT100 / 6B _	6.3	10	1.7
100.0	C	PCT100 / 6C _	6.3	6	0.9
100.0	CL	PCT100 / 6CL _	6.3	6	0.9
100.0	D	PCT100 / 6D _	6.3	6	0.9
100.0	DL	PCT100 / 6DL _	6.3	6	0.9
150.0	B	PCT150 / 6B _	9.5	10	1.2
150.0	C	PCT150 / 6C _	9.5	6	1.3
150.0	CL	PCT150 / 6CL _	9.0	8	0.3
150.0	D	PCT150 / 6D _	9.5	6	0.9
150.0	DL	PCT150 / 6DL _	9.0	6	0.4
220.0	C	PCT220 / 6C _	13.9	8	1.2
220.0	D	PCT220 / 6D _	13.9	8	0.4
220.0	DL	PCT220 / 6DL _	13.9	10	0.9
220.0	H	PCT220 / 6H _	13.9	8	0.4
330.0	C	PCT330 / 6C _	19.8	12	0.5
330.0	D	PCT330 / 6D _	20.8	8	0.4
330.0	DL	PCT330 / 6DL _	20.8	8	0.4
330.0	H	PCT330 / 6H _	20.8	8	0.4
470.0	D	PCT470 / 6D _	28.0	12	0.4
470.0	DL	PCT470 / 6DL _	28.2	20	0.2
470.0	H	PCT470 / 6H _	28.0	10	0.4
680.0	H	PCT680 / 6H _	42.8	10	0.5
1000.0	H	PCT1000 / 6H _	60.0	20	0.2
1000.0	Z	PCT1000 / 6Z _	60.0	16	0.4

_ Insert tolerance M(±20%) or K(±10%) to complete the Nemco part number

NEMCO reserves the right to supply a higher voltage rating, tighter tolerance and/or lower ESR in the same case size, to the same reliability standards.

RATINGS AND PART NUMBER REFERENCE

10 V DC @ 85°C (7 V DC @ 125°C)					
Capacitance (μF)	Case Size	Nemco Part No.	DCL (μA) max	tan δ max. (%)	ESR @ 100kHz max. (Ω)
1.0	AL	PCT1 / 10AL _	0.5	4	25.0
1.0	XL	PCT1 / 10XL _	0.5	4	25.0
1.5	AL	PCT1.5 / 10AL _	0.5	6	20.0
1.5	XL	PCT1.5 / 10XL _	0.5	6	20.0
2.2	A	PCT2.2 / 10A _	0.5	6	7.0
2.2	AL	PCT2.2 / 10AL _	0.5	6	12.0
2.2	XL	PCT2.2 / 10XL _	0.5	6	15.0
3.3	AL	PCT3.3 / 10AL _	0.5	6	8.0
3.3	BL	PCT3.3 / 10BL _	0.5	6	6.0
3.3	XL	PCT3.3 / 10XL _	0.5	6	8.0
4.7	A	PCT4.7 / 10A _	0.5	6	5.0
4.7	AL	PCT4.7 / 10AL _	0.5	6	5.0
4.7	BL	PCT4.7 / 10BL _	0.5	6	5.0
4.7	XL	PCT4.7 / 10XL _	0.5	6	9.0
6.8	A	PCT6.8 / 10A _	0.7	6	4.0
6.8	AL	PCT6.8 / 10AL _	0.7	6	4.0
6.8	B	PCT6.8 / 10B _	0.7	6	3.0
6.8	BL	PCT6.8 / 10BL _	0.7	6	4.0
6.8	XL	PCT6.8 / 10XL _	0.7	6	5.2
10.0	A	PCT10 / 10A _	1.0	6	3.0
10.0	AL	PCT10 / 10AL _	1.0	8	4.0
10.0	B	PCT10 / 10B _	1.0	6	2.5
10.0	BL	PCT10 / 10BL _	1.0	6	3.0
10.0	XL	PCT10 / 10XL _	1.0	20	6.0
15.0	A	PCT15 / 10A _	1.5	6	3.2
15.0	AL	PCT15 / 10AL _	1.5	6	2.0
15.0	B	PCT15 / 10B _	1.5	6	2.8
15.0	BL	PCT15 / 10BL _	1.5	8	2.8
15.0	CL	PCT15 / 10CL _	1.5	6	0.7
22.0	A	PCT22 / 10A _	2.2	8	3.0
22.0	B	PCT22 / 10B _	2.2	6	2.4
22.0	BL	PCT22 / 10BL _	2.2	8	2.2
22.0	C	PCT22 / 10C _	2.2	6	1.8
22.0	CL	PCT22 / 10CL _	2.2	6	0.6
33.0	A	PCT33 / 10A _	3.3	8	1.7
33.0	B	PCT33 / 10B _	3.3	6	1.8
33.0	C	PCT33 / 10C _	3.3	6	1.6
33.0	CL	PCT33 / 10CL _	3.3	6	1.6
47.0	B	PCT47 / 10B _	4.7	8	1.0
47.0	C	PCT47 / 10C _	4.7	6	1.2
47.0	CL	PCT47 / 10CL _	4.7	6	1.4
47.0	D	PCT47 / 10D _	4.7	6	0.9
47.0	DL	PCT47 / 10DL _	4.7	6	0.5
68.0	B	PCT68 / 10B _	6.8	6	1.4
68.0	C	PCT68 / 10C _	6.8	6	1.3
68.0	D	PCT68 / 10D _	6.8	6	0.9
100.0	B	PCT100 / 10B _	10.0	8	1.4
100.0	C	PCT100 / 10C _	10.0	8	1.2
100.0	CL	PCT100 / 10CL _	10.0	6	0.4
100.0	D	PCT100 / 10D _	10.0	6	0.9
100.0	DL	PCT100 / 10DL _	10.0	6	0.9
150.0	C	PCT150 / 10C _	15.0	8	0.9
150.0	D	PCT150 / 10D _	15.0	8	0.9
150.0	DL	PCT150 / 10DL _	15.0	6	1.2
150.0	H	PCT150 / 10H _	15.0	8	0.9
220.0	C	PCT220 / 10C _	22.0	8	0.5
220.0	D	PCT220 / 10D _	22.0	8	0.5
220.0	DL	PCT220 / 10DL _	22.0	10	0.5
220.0	H	PCT220 / 10H _	22.0	8	0.5
330.0	D	PCT330 / 10D _	33.0	8	0.9
330.0	H	PCT330 / 10H _	33.0	8	0.9
470.0	H	PCT470 / 10H _	47.0	10	0.5

16 V DC @ 85°C (10 V DC @ 125°C)					
Capacitance (μF)	Case Size	Nemco Part No.	DCL (μA) max	tan δ max. (%)	ESR @ 100kHz max. (Ω)
0.68	AL	PCT.68 / 16AL _	0.5	4	25.0
0.68	XL	PCT.68 / 16XL _	0.5	4	25.0
1.0	A	PCT1 / 16A _	0.5	4	11.0
1.0	AL	PCT1 / 16AL _	0.5	4	15.0
1.0	BL	PCT1 / 16BL _	0.5	4	5.0
1.0	XL	PCT1 / 16XL _	0.5	4	20.0
1.5	A	PCT1.5 / 16A _	0.5	6	8.0
1.5	AL	PCT1.5 / 16AL _	0.5	6	12.0
1.5	XL	PCT1.5 / 16XL _	0.5	6	10.0
2.2	A	PCT2.2 / 16A _	0.5	6	6.5
2.2	AL	PCT2.2 / 16AL _	0.5	6	6.0
2.2	BL	PCT2.2 / 16BL _	0.5	6	6.5
2.2	XL	PCT2.2 / 16XL _	0.5	6	6.5
3.3	A	PCT3.3 / 16A _	0.5	6	5.0
3.3	AL	PCT3.3 / 16AL _	0.5	6	5.0
3.3	B	PCT3.3 / 16B _	0.5	6	4.5
3.3	BL	PCT3.3 / 16BL _	0.5	6	5.0
3.3	XL	PCT3.3 / 16XL _	0.5	8	5.0
4.7	A	PCT4.7 / 16A _	0.8	6	4.0
4.7	AL	PCT4.7 / 16AL _	0.8	8	4.5
4.7	B	PCT4.7 / 16B _	0.8	6	3.5
4.7	BL	PCT4.7 / 16BL _	0.8	6	4.5
6.8	A	PCT6.8 / 16A _	1.1	6	3.5
6.8	AL	PCT6.8 / 16AL _	1.1	8	2.4
6.8	B	PCT6.8 / 16B _	1.1	6	2.5
6.8	BL	PCT6.8 / 16BL _	1.1	6	3.5
6.8	C	PCT6.8 / 16C _	1.1	6	2.5
10.0	A	PCT10 / 16A _	1.6	8	3.0
10.0	B	PCT10 / 16B _	1.6	6	2.8
10.0	BL	PCT10 / 16BL _	1.6	8	2.2
10.0	C	PCT10 / 16C _	1.6	6	2.0
10.0	CL	PCT10 / 16CL _	1.6	6	2.0
15.0	A	PCT15 / 16A _	2.4	6	2.0
15.0	B	PCT15 / 16B _	2.4	6	2.5
15.0	BL	PCT15 / 16BL _	2.4	6	2.0
15.0	C	PCT15 / 16C _	2.4	6	1.8
15.0	CL	PCT15 / 16CL _	2.4	6	0.7
22.0	B	PCT22 / 16B _	3.5	6	2.3
22.0	C	PCT22 / 16C _	3.5	6	1.0
22.0	CL	PCT22 / 16CL _	3.5	6	1.6
22.0	D	PCT22 / 16D _	3.5	6	1.1
33.0	B	PCT33 / 16B _	5.3	8	2.1
33.0	C	PCT33 / 16C _	5.3	6	1.5
33.0	CL	PCT33 / 16CL _	5.3	6	1.5
33.0	D	PCT33 / 16D _	5.3	6	0.9
33.0	DL	PCT33 / 16DL _	5.3	6	0.9
47.0	C	PCT47 / 16C _	7.5	6	0.5
47.0	CL	PCT47 / 16CL _	7.5	6	0.4
47.0	D	PCT47 / 16D _	7.5	6	0.9
47.0	DL	PCT47 / 16DL _	7.5	6	0.7
68.0	C	PCT68 / 16C _	10.9	6	1.3
68.0	D	PCT68 / 16D _	10.9	6	0.9
68.0	DL	PCT68 / 16DL _	10.9	6	0.9
100.0	C	PCT100 / 16C _	16.0	8	1.0
100.0	D	PCT100 / 16D _	16.0	6	0.6
100.0	DL	PCT100 / 16DL _	16.0	8	0.9
100.0	H	PCT100 / 16H _	16.0	6	0.9
150.0	D	PCT150 / 16D _	24.0	6	0.9
150.0	DL	PCT150 / 16DL _	24.0	15	0.3
150.0	H	PCT150 / 16H _	24.0	8	0.3
220.0	H	PCT220 / 16H _	35.2	10	0.5
330.0	H	PCT330 / 16H _	52.8	30	0.4

_ Insert tolerance M(±20%) or K(±10%) to complete the Nemco part number

NEMCO reserves the right to supply a higher voltage rating, tighter tolerance and/or lower ESR in the same case size, to the same reliability standards.

RATINGS AND PART NUMBER REFERENCE

20 V DC @ 85°C (13V DC @ 125°C)					
Capacitance (μF)	Case Size	Nemco Part No.	DCL (μA) max	tan δ max. (%)	ESR @ 100kHz max. (Ω)
0.10	AL	PCT.1 / 20AL _	0.5	4	25.0
0.10	XL	PCT.1 / 20XL _	0.5	4	25.0
0.15	AL	PCT.15 / 20AL _	0.5	4	25.0
0.15	XL	PCT.15 / 20XL _	0.5	4	25.0
0.22	AL	PCT.22 / 20AL _	0.5	4	25.0
0.22	XL	PCT.22 / 20XL _	0.5	4	25.0
0.33	AL	PCT.33 / 20AL _	0.5	4	25.0
0.33	XL	PCT.33 / 20XL _	0.5	4	25.0
0.47	AL	PCT.47 / 20AL _	0.5	4	25.0
0.47	XL	PCT.47 / 20XL _	0.5	4	25.0
0.68	AL	PCT.68 / 20AL _	0.5	4	25.0
0.68	BL	PCT.68 / 20BL _	0.5	4	15.0
0.68	XL	PCT.68 / 20XL _	0.5	4	20.0
1.0	A	PCT1 / 20A _	0.5	4	9.0
1.0	AL	PCT1 / 20AL _	0.5	4	12.0
1.0	BL	PCT1 / 20BL _	0.5	4	9.0
1.0	XL	PCT1 / 20XL _	0.5	4	20.0
1.5	A	PCT1.5 / 20A _	0.5	6	6.5
1.5	AL	PCT1.5 / 20AL _	0.5	6	5.4
1.5	BL	PCT1.5 / 20BL _	0.5	6	6.5
1.5	XL	PCT1.5 / 20XL _	0.5	6	9.6
2.2	A	PCT2.2 / 20A _	0.5	6	5.3
2.2	AL	PCT2.2 / 20AL _	0.5	6	4.5
2.2	B	PCT2.2 / 20B _	0.5	6	3.5
2.2	BL	PCT2.2 / 20BL _	0.5	6	6.0
2.2	XL	PCT2.2 / 20XL _	0.5	6	6.0
3.3	A	PCT3.3 / 20A _	0.7	6	4.5
3.3	B	PCT3.3 / 20B _	0.7	6	3.0
3.3	BL	PCT3.3 / 20BL _	0.7	6	3.0
4.7	A	PCT4.7 / 20A _	0.9	6	4.0
4.7	B	PCT4.7 / 20B _	0.9	6	3.0
4.7	BL	PCT4.7 / 20BL _	0.9	6	3.0
6.8	A	PCT6.8 / 20A _	1.4	6	2.4
6.8	B	PCT6.8 / 20B _	1.4	6	2.5
6.8	BL	PCT6.8 / 20BL _	1.4	6	2.6
6.8	C	PCT6.8 / 20C _	1.4	6	2.0
10.0	B	PCT10 / 20B _	2.0	6	2.1
10.0	C	PCT10 / 20C _	2.0	6	2.2
10.0	CL	PCT10 / 20CL _	2.0	6	1.9
15.0	B	PCT15 / 20B _	3.0	6	2.0
15.0	C	PCT15 / 20C _	3.0	6	1.7
15.0	CL	PCT15 / 20CL _	3.0	6	1.7
22.0	B	PCT22 / 20B _	4.4	6	1.8
22.0	C	PCT22 / 20C _	4.4	6	1.6
22.0	CL	PCT22 / 20CL _	4.4	6	1.6
22.0	D	PCT22 / 20D _	4.4	6	0.9
22.0	DL	PCT22 / 20DL _	4.4	6	0.9
33.0	C	PCT33 / 20C _	6.6	6	1.5
33.0	D	PCT33 / 20D _	6.6	6	0.9
33.0	DL	PCT33 / 20DL _	6.6	6	0.6
47.0	C	PCT47 / 20C _	9.4	6	0.5
47.0	D	PCT47 / 20D _	9.4	6	0.9
47.0	DL	PCT47 / 20DL _	9.4	6	0.9
47.0	H	PCT47 / 20H _	9.4	6	0.9
68.0	C	PCT68 / 20C _	13.6	8	0.5
68.0	D	PCT68 / 20D _	13.6	6	0.4
68.0	DL	PCT68 / 20DL _	13.6	6	0.9
68.0	H	PCT68 / 20H _	13.6	6	0.9
100.0	D	PCT100 / 20D _	20.0	6	0.5
100.0	H	PCT100 / 20H _	20.0	6	0.4
150.0	H	PCT150 / 20H _	30.0	8	0.3

25 V DC @ 85°C (17 V DC @ 125°C)					
Capacitance (μF)	Case Size	Nemco Part No.	DCL (μA) max	tan δ max. (%)	ESR @ 100kHz max. (Ω)
0.15	XL	PCT.15 / 25XL _	0.5	4	24.0
0.22	XL	PCT.22 / 25XL _	0.5	4	21.0
0.33	XL	PCT.33 / 25XL _	0.5	4	17.0
0.47	AL	PCT.47 / 25AL _	0.5	4	14.0
0.47	XL	PCT.47 / 25XL _	0.5	4	15.0
0.68	AL	PCT.68 / 25AL _	0.5	4	10.0
0.68	XL	PCT.68 / 25XL _	0.5	4	13.0
1.0	A	PCT1 / 25A _	0.5	4	8.0
1.0	AL	PCT1 / 25AL _	0.5	4	8.0
1.0	XL	PCT1 / 25XL _	0.5	4	8.0
1.5	A	PCT1.5 / 25A _	0.5	6	7.5
1.5	AL	PCT1.5 / 25AL _	0.5	6	5.4
1.5	B	PCT1.5 / 25B _	0.5	6	5.0
1.5	BL	PCT1.5 / 25BL _	0.5	6	5.0
2.2	A	PCT2.2 / 25A _	0.6	6	7.0
2.2	B	PCT2.2 / 25B _	0.6	6	4.5
2.2	BL	PCT2.2 / 25BL _	0.6	6	4.5
3.3	A	PCT3.3 / 25A _	0.8	6	3.7
3.3	B	PCT3.3 / 25B _	0.8	6	3.5
3.3	BL	PCT3.3 / 25BL _	0.8	6	3.5
3.3	C	PCT3.3 / 25C _	0.8	6	2.8
3.3	CL	PCT3.3 / 25CL _	0.8	6	1.6
4.7	A	PCT4.7 / 25A _	1.2	6	3.1
4.7	B	PCT4.7 / 25B _	1.2	6	1.5
4.7	BL	PCT4.7 / 25BL _	1.2	6	3.1
4.7	C	PCT4.7 / 25C _	1.2	6	2.4
4.7	CL	PCT4.7 / 25CL _	1.2	6	1.2
6.8	B	PCT6.8 / 25B _	1.7	6	2.8
6.8	C	PCT6.8 / 25C _	1.7	6	2.0
6.8	CL	PCT6.8 / 25CL _	1.7	6	2.0
10.0	B	PCT10 / 25B _	2.5	6	2.5
10.0	C	PCT10 / 25C _	2.5	6	1.8
10.0	CL	PCT10 / 25CL _	2.5	6	1.8
10.0	D	PCT10 / 25D _	2.5	6	1.2
15.0	C	PCT15 / 25C _	3.8	6	1.6
15.0	D	PCT15 / 25D _	3.8	6	1.0
15.0	DL	PCT15 / 25DL _	3.8	6	1.0
22.0	C	PCT22 / 25C _	5.5	6	1.4
22.0	D	PCT22 / 25D _	5.5	6	0.9
22.0	DL	PCT22 / 25DL _	5.5	6	0.9
33.0	D	PCT33 / 25D _	8.3	6	0.9
33.0	H	PCT33 / 25H _	8.3	6	0.9
47.0	D	PCT47 / 25D _	11.8	6	0.9
47.0	DL	PCT47 / 25DL _	11.8	6	0.9
47.0	H	PCT47 / 25H _	11.8	6	0.9
68.0	H	PCT68 / 25H _	17.0	6	0.9
100.0	H	PCT100 / 25H _	25.0	10	0.3
100.0	Z	PCT100 / 25Z _	25.0	8	0.4
150.0	Z	PCT150 / 25Z _	37.5	10	0.4

_ Insert tolerance M(±20%) or K(±10%) to complete the Nemco part number
 NEMCO reserves the right to supply a higher voltage rating, tighter tolerance and/or lower ESR in the same case size, to the same reliability standards.

RATINGS AND PART NUMBER REFERENCE

35 V DC @ 85°C (23 V DC @ 125°C)					
Capacitance (μF)	Case Size	Nemco Part No.	DCL (μA) max	tan δ max. (%)	ESR @ 100kHz max. (Ω)
0.10	A	PCT.1 / 35A _	0.5	4	24.0
0.10	AL	PCT.1 / 35AL _	0.5	4	24.0
0.10	XL	PCT.1 / 35XL _	0.5	4	29.0
0.15	A	PCT.15 / 35A _	0.5	4	21.0
0.15	AL	PCT.15 / 35AL _	0.5	4	21.0
0.15	XL	PCT.15 / 35XL _	0.5	4	24.0
0.22	A	PCT.22 / 35A _	0.5	4	18.0
0.22	AL	PCT.22 / 35AL _	0.5	4	18.0
0.22	XL	PCT.22 / 35XL _	0.5	4	21.0
0.33	A	PCT.33 / 35A _	0.5	4	15.0
0.33	AL	PCT.33 / 35AL _	0.5	4	15.0
0.33	XL	PCT.33 / 35XL _	0.5	4	17.0
0.47	A	PCT.47 / 35A _	0.5	4	12.0
0.47	AL	PCT.47 / 35AL _	0.5	4	12.0
0.47	B	PCT.47 / 35B _	0.5	4	10.0
0.47	BL	PCT.47 / 35BL _	0.5	4	10.0
0.47	XL	PCT.47 / 35XL _	0.5	4	15.0
0.68	A	PCT.68 / 35A _	0.5	4	8.0
0.68	AL	PCT.68 / 35AL _	0.5	4	8.0
0.68	B	PCT.68 / 35B _	0.5	4	8.0
0.68	BL	PCT.68 / 35BL _	0.5	4	8.0
1.0	A	PCT1 / 35A _	0.5	4	7.5
1.0	AL	PCT1 / 35AL _	0.5	4	7.5
1.0	B	PCT1 / 35B _	0.5	4	6.5
1.0	BL	PCT1 / 35BL _	0.5	4	6.5
1.5	A	PCT1.5 / 35A _	0.5	6	7.5
1.5	B	PCT1.5 / 35B _	0.5	6	5.2
1.5	BL	PCT1.5 / 35BL _	0.5	6	5.2
1.5	C	PCT1.5 / 35C _	0.5	6	4.5
2.2	A	PCT2.2 / 35A _	0.8	6	4.5
2.2	B	PCT2.2 / 35B _	0.8	6	4.2
2.2	BL	PCT2.2 / 35BL _	0.8	6	4.2
2.2	C	PCT2.2 / 35C _	0.8	6	3.5
3.3	B	PCT3.3 / 35B _	1.2	6	3.5
3.3	C	PCT3.3 / 35C _	1.2	6	2.5
3.3	CL	PCT3.3 / 35CL _	1.2	6	1.6
3.3	D	PCT3.3 / 35D _	1.2	6	2.5
4.7	B	PCT4.7 / 35B _	1.2	6	3.1
4.7	C	PCT4.7 / 35C _	1.6	6	2.2
4.7	D	PCT4.7 / 35D _	1.6	6	1.5
6.8	C	PCT6.8 / 35C _	2.4	6	1.8
6.8	D	PCT6.8 / 35D _	2.4	6	1.3
6.8	DL	PCT6.8 / 35DL _	2.3	6	0.9
10.0	C	PCT10 / 35C _	3.5	6	1.6
10.0	D	PCT10 / 35D _	3.5	6	1.0
10.0	DL	PCT10 / 35DL _	3.5	6	1.0
10.0	H	PCT10 / 35H _	3.5	6	0.9
15.0	C	PCT15 / 35C _	5.3	6	1.4
15.0	D	PCT15 / 35D _	5.3	6	0.9
15.0	DL	PCT15 / 35DL _	5.3	6	0.6
22.0	D	PCT22 / 35D _	7.7	6	0.9
22.0	DL	PCT22 / 35DL _	7.7	6	0.5
22.0	H	PCT22 / 35H _	7.7	6	0.5
33.0	D	PCT33 / 35D _	11.6	6	0.9
33.0	H	PCT33 / 35H _	11.6	6	0.9
33.0	Z	PCT33 / 35Z _	11.6	6	0.5
47.0	H	PCT47 / 35H _	16.5	6	0.9
47.0	Z	PCT47 / 35Z _	16.5	6	0.4
68.0	Z	PCT68 / 35Z _	23.8	6	0.5

50 V DC @ 85°C (33 V DC @ 125°C)					
Capacitance (μF)	Case Size	Nemco Part No.	DCL (μA) max	tan δ max. (%)	ESR @ 100kHz max. (Ω)
0.10	A	PCT.1 / 50A _	0.5	4	22.0
0.10	AL	PCT.1 / 50AL _	0.5	4	19.0
0.15	A	PCT.15 / 50A _	0.5	4	15.0
0.15	AL	PCT.15 / 50AL _	0.5	4	16.0
0.15	B	PCT.15 / 50B _	0.5	4	17.0
0.22	A	PCT.22 / 50A _	0.5	4	18.0
0.22	AL	PCT.22 / 50AL _	0.5	4	13.0
0.22	B	PCT.22 / 50B _	0.5	4	14.0
0.33	B	PCT.33 / 50B _	0.5	4	12.0
0.33	AL	PCT.33 / 50AL _	0.5	4	11.0
0.33	BL	PCT.33 / 50BL _	0.5	4	11.0
0.47	A	PCT.47 / 50A _	0.5	4	9.5
0.47	AL	PCT.47 / 50AL _	0.5	4	9.5
0.47	B	PCT.47 / 50B _	0.7	4	9.5
0.47	BL	PCT.47 / 50BL _	0.5	4	9.5
0.47	C	PCT.47 / 50C _	0.5	4	8.0
0.68	A	PCT.68 / 50A _	0.5	4	7.9
0.68	B	PCT.68 / 50B _	0.5	4	8.0
0.68	C	PCT.68 / 50C _	0.5	4	7.0
1.0	A	PCT1 / 50A _	0.5	4	6.6
1.0	B	PCT1 / 50B _	0.5	4	7.0
1.0	C	PCT1 / 50C _	0.5	4	5.5
1.0	CL	PCT1 / 50CL _	0.5	6	4.4
1.5	B	PCT1.5 / 50B _	0.8	8	5.4
1.5	C	PCT1.5 / 50C _	0.8	6	4.5
1.5	D	PCT1.5 / 50D _	0.8	6	4.0
2.2	B	PCT2.2 / 50B _	1.1	8	4.5
2.2	C	PCT2.2 / 50C _	1.1	8	2.5
2.2	D	PCT2.2 / 50D _	1.1	6	2.5
3.3	C	PCT3.3 / 50C _	1.6	6	2.5
3.3	D	PCT3.3 / 50D _	1.7	6	2.0
3.3	DL	PCT3.3 / 50DL _	1.7	4	1.7
4.7	C	PCT4.7 / 50C _	0.5	4	1.4
4.7	D	PCT4.7 / 50D _	2.4	6	1.4
4.7	DL	PCT4.7 / 50DL _	2.4	6	1.2
6.8	C	PCT6.8 / 50C _	3.4	6	1.0
6.8	D	PCT6.8 / 50D _	3.4	6	1.0
6.8	DL	PCT6.8 / 50DL _	3.4	6	0.9
10.0	D	PCT10 / 50D _	5.0	6	0.8
10.0	H	PCT10 / 50H _	5.0	6	1.0
15.0	D	PCT15 / 50D _	7.5	4	0.6
15.0	H	PCT15 / 50H _	7.5	6	0.6
22.0	Z	PCT22 / 50Z _	11.0	8	0.6

_ Insert tolerance M(±20%) or K(±10%) to complete the Nemco part number
 NEMCO reserves the right to supply a higher voltage rating, tighter tolerance and/or lower ESR in the same case size, to the same reliability standards.

PACKAGING REFERENCE

CASE SIZE	CASE SIZE	STANDARD PACKAGING	AVAILABLE
NEMCO	EIA IECQ	7" Reel Quantity	13" Reel Quantity
A	3216-18	2000	8000
B	3528-21	2000	8000
C	6032-28	500	3000
D	7343-31	500	2500
H	7343-43	400	1500
Z	7361-37	400	1500
<u>Low Profile Sizes</u>			
XL	2012-12	2500	10000
AL	3216-12	2500	10000
BL	3528-12	2500	10000
CL	6032-15	1000	5000
DL	7343-20	1000	5000