



Wire Protection & Management > Wiring Ducts & Accessories > Wiring Ducts & Covers >

Wiring Duct Covers: Gray, Low Smoke, Halogen Free, 2 meters



Wiring Duct Product Type: **Wiring Duct Cover**

Primary Product Material: **PC-ABS**

Product Height: **11.5 mm [.453 in]**

Product Length: **2000 mm [78.74 in]**

Product Width: **60 mm [2.362 in]**

[All Wiring Duct Covers: Gray, Low Smoke, Halogen Free, 2 meters \(4\)](#)

Features

Product Type Features

Wiring Duct Product Type	Wiring Duct Cover
--------------------------	-------------------

Body Features

Primary Product Color	Gray
Primary Product Material	PC-ABS

Dimensions

Product Height	11.5 mm[.453 in]
Product Length	2000 mm[78.74 in]
Product Width	60 mm[2.362 in]

Usage Conditions

Operating Temperature Range	-25 – 90 °C[-13 – 194 °F]
-----------------------------	---------------------------

Packaging Features

Packaging Quantity	3
--------------------	---



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Out of Scope
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought


1SET411252R0000

Wiring Duct Cover, PC-ABS, 11.5 mm [.453 in] Height, 2000 mm [78.74 in] Length, 60 mm [2.362 in] Width, -25 – 90 °C [-13 – 194 °F]





TE Part #316088-1
2.5 SIGNAL D/LOCK CAP HSG 4P

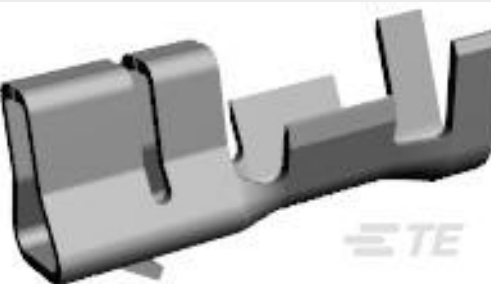

TE Part #917684-1
2.5 SIGNAL DBL LOCK REC CONT M



TE Part #917688-1
SIGNAL DOUBLE LOCK PLUG HSG 4P
NATURAL



TE Part #917765-1
2.5 SIGNAL D/LOCK TAB CONT. M



TE Part #1623462-2
CRG1206 1% 22M



TE Part #5102159-7
A/L UNIV HDR 30P RA

Documents

Product Drawings

WD-1-CH-GR060

French

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SET411252R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET411252R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET411252R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Datasheet - ENTRELEC-wiring-duct-DS

English

Datasheet - Entrelec Electrical-Solutions

Essential Entrelec Terminal Blocks

French

Essential Entrelec Terminal Blocks

1SET411252R0000

Wiring Duct Cover, PC-ABS, 11.5 mm [.453 in] Height, 2000 mm [78.74 in] Length, 60 mm [2.362 in] Width, -25 – 90 °C [-13 – 194 °F]



English

[Essential Entrelec Terminal Blocks](#)

Japanese

[Agency Approvals](#)

[Agency Approval Document](#)

English

[Agency Approval Document](#)

English