




Process adapter Tri-Clamp

ADAPT IFM-CLAMP ISO2852 2" 3A

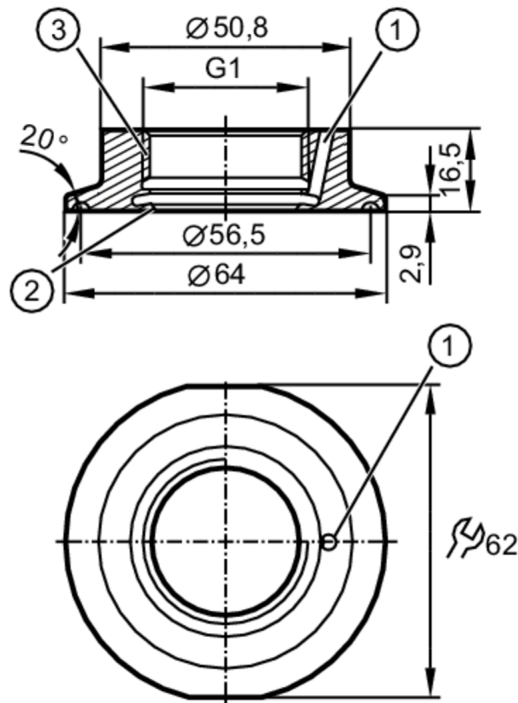

- 1 Leakage port
- 2 sealing area
- 3 Aseptoflex Vario



CRN EC 1935/2004 EHEDG Certified FCM FDA

Application

Design	with leakage port	
Pressure rating	16 bar	1.6 MPa

Tests / approvals

Pressure Equipment Directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.	
Safety instructions	The compatibility between medium and product material has to be checked in all applications.	

Mechanical data

Weight	[g]	226.5
Materials (wetted parts)	stainless steel (316L/1.4435) surface characteristics: Ra < 0,4 µm / Rz = 4 µm	
Sensor connection	G 1 internal thread Aseptoflex Vario	
Process connection	Clamp DN50 (2") Ø 64 mm DIN 32676 (ISO 2852)	
Sealing	Gasket	
Hygienic equipment class to DIN 11866	H4	

Accessories

Items supplied	O-ring: 1 x (24 x 2 mm), EPDM, FDA compliant, E30054	
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123	
	sealing ring: 1, PEEK, FDA compliant, E30124	

Remarks

Pack quantity	1 pcs.
---------------	--------