


Similar to illustration

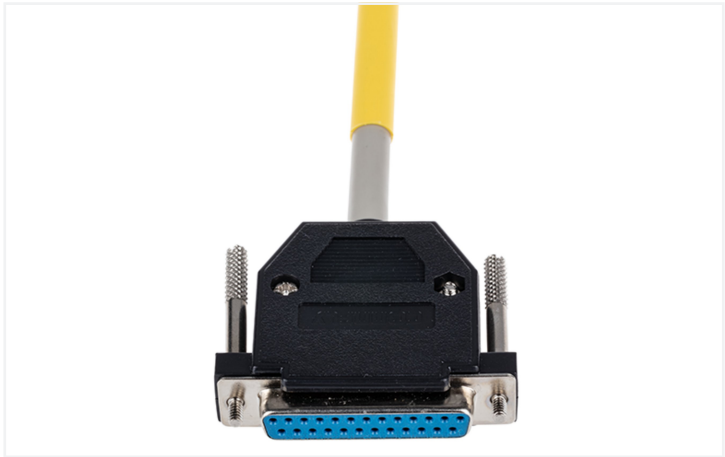

Similar to illustration

Color coding acc. to DIN VDE 47100		15 poles female Sub-D connector
		Pin number
White		1
Brown		2
Green		3
Yellow		4
Grey		5
Pink		6
Blue		7
Red		8
Black		9
Violet		10
Grey-Pink		11
Red-Blue		12
White-Green		13
Brown-Green		14
White-Yellow		15
Shield		Connected to Sub-D

Notes	
Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Electrical data	
Operating voltage	≤ 35 VAC/VDC
Current per wire (max.)	2 A

Connection data	
Cable type	LiYCY
Color code	per DIN VDE 47100
Connection 1	
Pluggable connector	D-subminiature female connector
Pole number 1	15
Connection type 1	System
Wire cross-section	0.25 mm²



Connection 2	
Connector 2	open-ended
Connection type	open-ended

Physical data	
Cable length	2 m

Material data	
Fire load	0 MJ
Weight	1.1 g

Environmental requirements	
Ambient temperature (operation)	-20 ... +50 °C

Commercial data	
ETIM 9.0	EC001855
ETIM 8.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
GTIN	4050821835622
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 706-100/615-200	