


Board-to-board Link




Specification	
Part Number	T4001G01A1MAA
Pole Number	1
Rated Volage	300V DC/AC
Rated Current	9A DC/AC
Withstand Voltage	1600V AC/min
Temperature Range	-45 °C ~ 85 °C
Contact Resistance	≤ 20 mΩ
Insulation Resistance	≥ 1000 MΩ
Material	Brass
Contact Finishing	Tin-plated
Insulation Material	PA66 (UL94V-0)
Insulation Color	Nature
Approval	UL 1977

Mechanical Specification (unit: mm)

General Tolerance: ± 0.15 mm if not specified

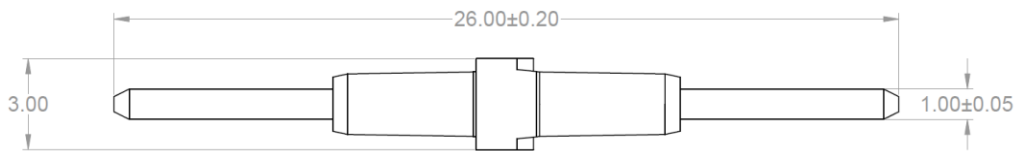

Application

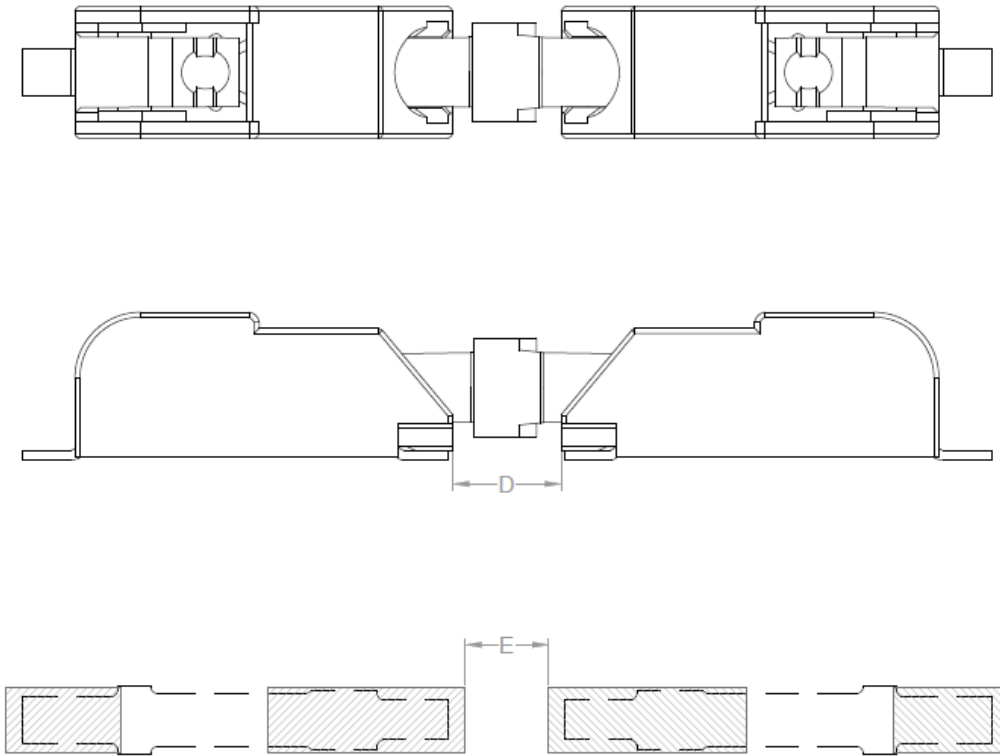

Recommended Spacing

D: 3.3 - 5.3 mm

E: 2.55 - 4.55 mm

Note:

1. The application above is for reference only and for the use with T4002M01F2MBR, T4002M02F2MBR, and T4002M03F2MBR.
2. The board-to-board link may also work with other types of similar terminal blocks. Engineering tests and verifications may be required if using different terminal blocks.