
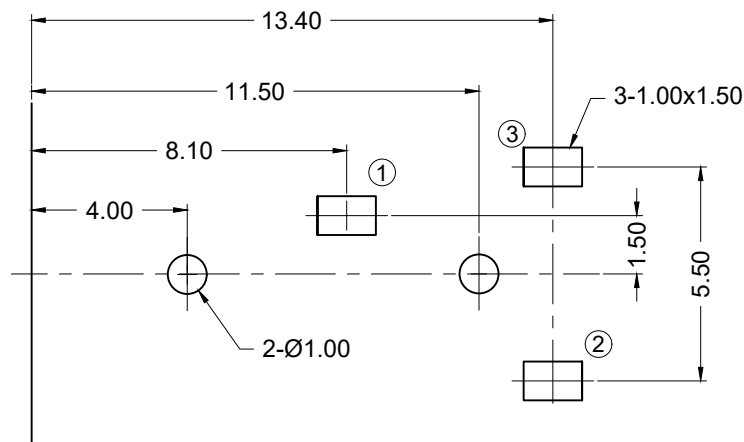
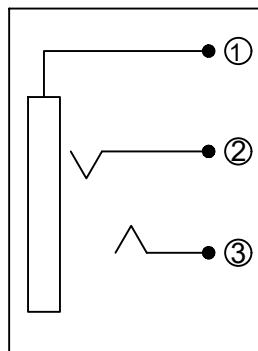
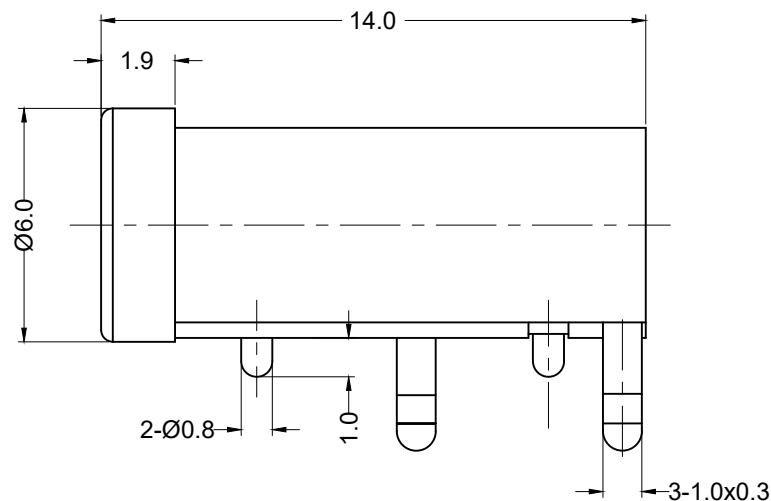


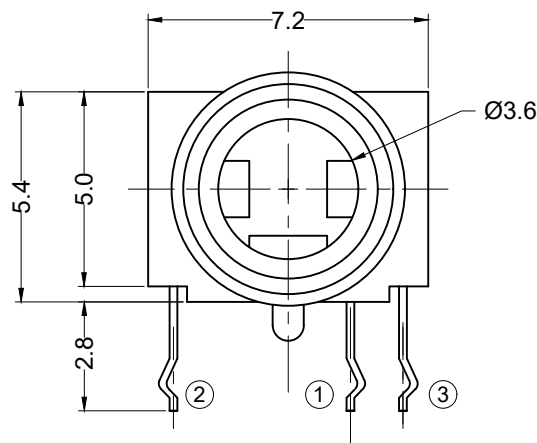

Recommended PCB Layout
(Bottom View)

Materials and Finish

Housing: PBT Thermoplastic,
UL 94V-0 Rated

Terminals: Copper Alloy
Matte Tin Plated

Electrical Characteristics

Rated Current: 0.3A

Rated Voltage: DC 16V

Contact Resistance:
Before Test: 30mohms Max.
After Durability Test:
60 mohms Max.

Insulation Resistance:
More than 100 Megohms
at 250V DC

Dielectric Strength:
250V AC RMS for 1 minute

Operating Temp:
-25°C to +80°C

Mechanical Characteristics

Insertion Force:
0.4kg - 2.0kg

Extraction Force:
0.3kg - 2.0kg

Durability: 5000 mating cycles

RoHS COMPLIANT



Tolerances	
X.X ± 0.35	
X.XX ± 0.25	
Unless Stated Otherwise	

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
C1	07/10/08	ECO# 08-060	S. Vien	H. MA	R. Aguirre	07/11/05
D1	09/18/08	ECO# 08-077	S. Vien	H. MA		
D2	11/23/10	ECO# 10-084	S. Vien	H. MA		
D3	02/10/12	ECO# 12-004	S. Vien	H. MA		
D4	08/14/18	Update Address	D. Shehan	N/A		
D5	07/15/25	Add Current & Voltage	K. Wang	C. Kelleher		

STX-3000

3.5mm Stereo Jack, RoHS Compliant

All Plastic Body, Right Angle, PCB Mount

