IS61C256AL

32K x 8 HIGH-SPEED CMOS STATIC RAM

SEPTEMBER 2024

FEATURES

- High-speed access time: 10, 12 ns
- CMOS Low Power Operation
  - — 1 mW (typical) CMOS standby
  - — 125 mW (typical) operating
- Fully static operation: no clock or refresh required
- TTL compatible inputs and outputs
- Single 5V power supply
- Lead-free available

DESCRIPTION

The ISSI IS61C256AL is a very high-speed, low power, 32,768 word by 8-bit static RAMs. It is fabricated using ISSI's high-performance CMOS technology. This highly reliable process coupled with innovative circuit design techniques, yields access times as fast as 10 ns maximum.

When $\overline{CE}$ is HIGH (deselected), the device assumes a standby mode at which the power dissipation can be reduced down to 150 µW (typical) with CMOS input levels.

Easy memory expansion is provided by using an active LOW Chip Enable ($\overline{CE}$) input and an active LOW Output Enable ($\overline{OE}$) input. The active LOW Write Enable ($\overline{WE}$) controls both writing and reading of the memory.

The IS61C256AL is pin compatible with other 32Kx8 SRAMs and is available in a 28-pin TSOP (Type I) package.

FUNCTIONAL BLOCK DIAGRAM

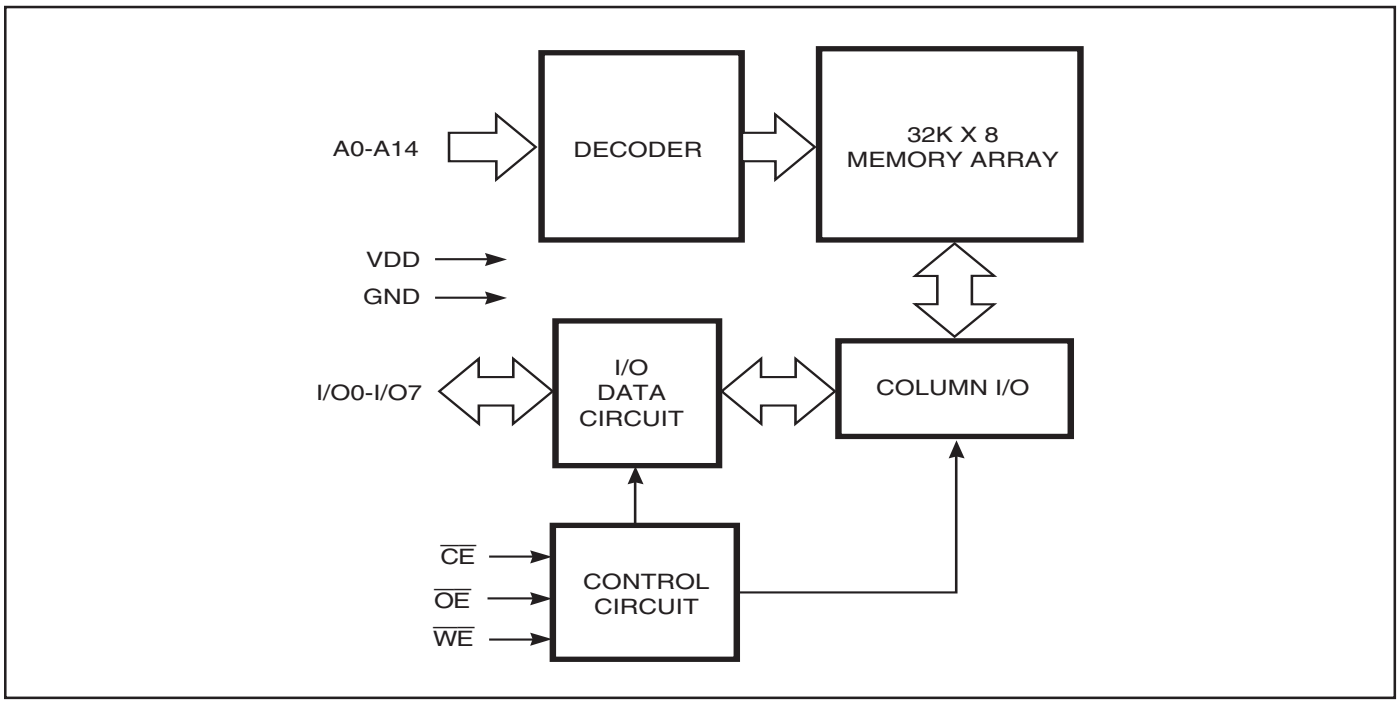

Copyright © 2024 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products.

Integrated Silicon Solution, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Integrated Silicon Solution, Inc. receives written assurance to its satisfaction, that:
a.) the risk of injury or damage has been minimized;
b.) the user assume all such risks; and

c.) potential liability of Integrated Silicon Solution, Inc is adequately protected under the circumstances
c.) potential liability of Integrated Silicon Solution, Inc is adequately protected under the circumstances

PIN CONFIGURATION

28-Pin TSOP

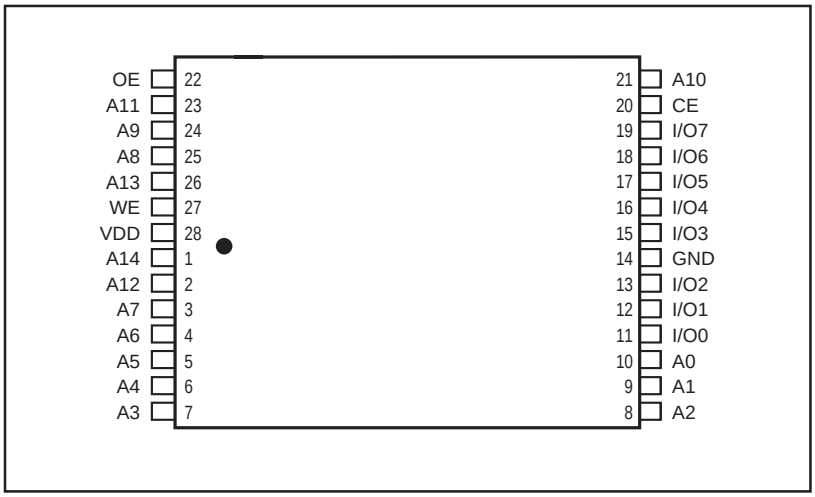

PIN DESCRIPTIONS

A0-A14	Address Inputs
CE	Chip Enable Input
OE	Output Enable Input
WE	Write Enable Input
I/O0-I/O7	Bidirectional Ports
V_{DD}	Power
GND	Ground

TRUTH TABLE

Mode	WE	CE	OE	I/O Operation	V_{DD} Current
Not Selected (Power-down)	X	H	X	High-Z	I_{SB1}, I_{SB2}
Output Disabled	H	L	H	High-Z	I_{CC}
Read	H	L	L	D_{OUT}	I_{CC}
Write	L	L	X	D_{IN}	I_{CC}

ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Parameter	Value	Unit
V_{TERM}	Terminal Voltage with Respect to GND	–0.5 to +7.0	V
T_{STG}	Storage Temperature	–65 to +150	°C
P_T	Power Dissipation	1.5	W
I_{OUT}	DC Output Current (LOW)	20	mA

1. Stress greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Notes:

READ CYCLE SWITCHING CHARACTERISTICS[1] (Over Operating Range)

Symbol	Parameter	-10 ns Min.	-10 ns Max	-12 ns Min.	-12 ns Max.	Unit
t_{RC}	Read Cycle Time	10	—	12	—	ns
t_{AA}	Address Access Time	—	10	—	12	ns
t_{OHA}	Output Hold Time	2	—	2	—	ns
t_{ACS}	$\overline{CE}$ Access Time	—	10	—	12	ns
t_{DOE}	$\overline{OE}$ Access Time	—	6	—	6	ns
t_{LZOE}[2]	$\overline{OE}$ to Low-Z Output	0	—	0	—	ns
t_{HZOE}[2]	$\overline{OE}$ to High-Z Output	—	5	—	6	ns
t_{LZCS}[2]	$\overline{CE}$ to Low-Z Output	2	—	3	—	ns
t_{HZCS}[2]	$\overline{CE}$ to High-Z Output	—	5	—	7	ns
t_{PU}[3]	$\overline{CE}$ to Power-Up	0	—	0	—	ns
t_{PD}[3]	$\overline{CE}$ to Power-Down	—	10	—	12	ns

Notes:
1. Test conditions assume signal transition times of 5 ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V and output loading specified in Figure 1.
2. Tested with the load in Figure 2. Transition is measured ±500 mV from steady-state voltage. Not 100% tested.
3. Not 100% tested.

AC TEST CONDITIONS

Parameter	Unit
Input Pulse Level	0V to 3.0V
Input Rise and Fall Times	3 ns
Input and Output Timing and Reference Levels	1.5V
Output Load	See Figures 1 and 2

AC TEST LOADS

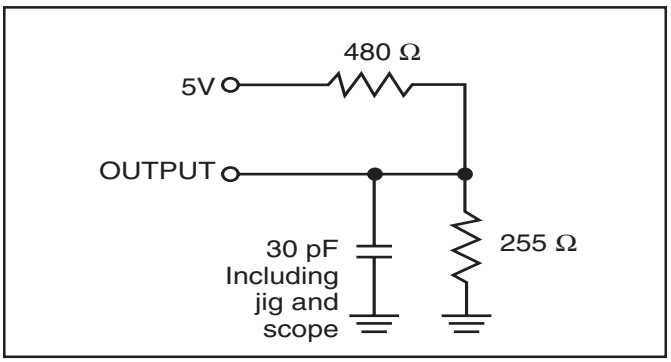

Figure 1

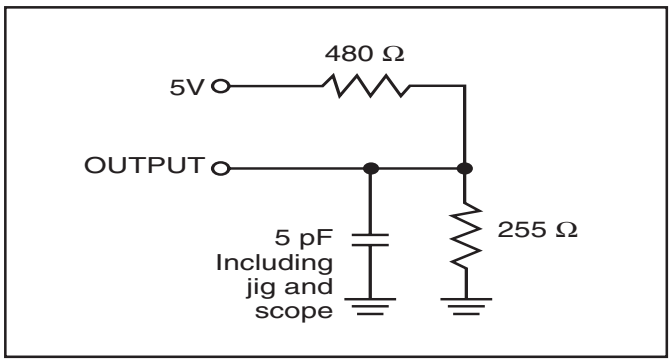

Figure 2

AC WAVEFORMS
READ CYCLE NO. 1[1,2]

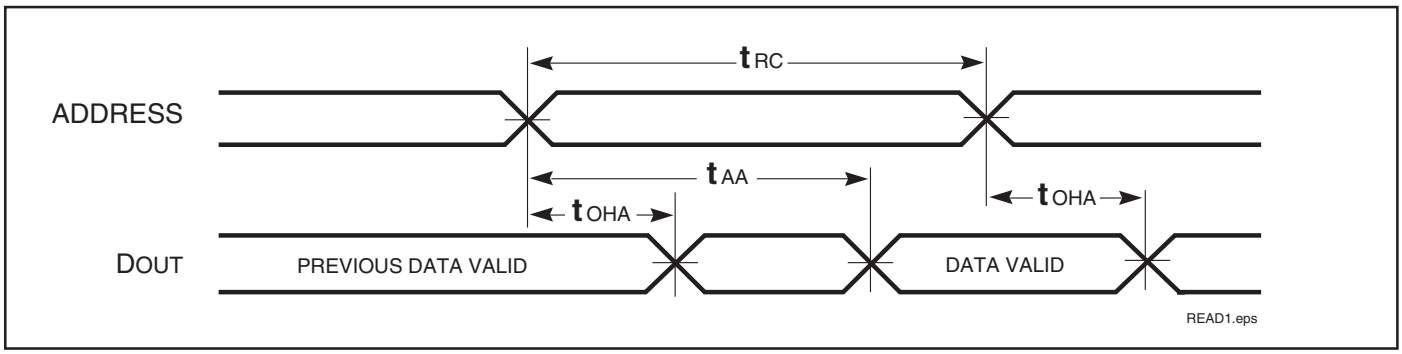

READ CYCLE NO. 2[1,3]

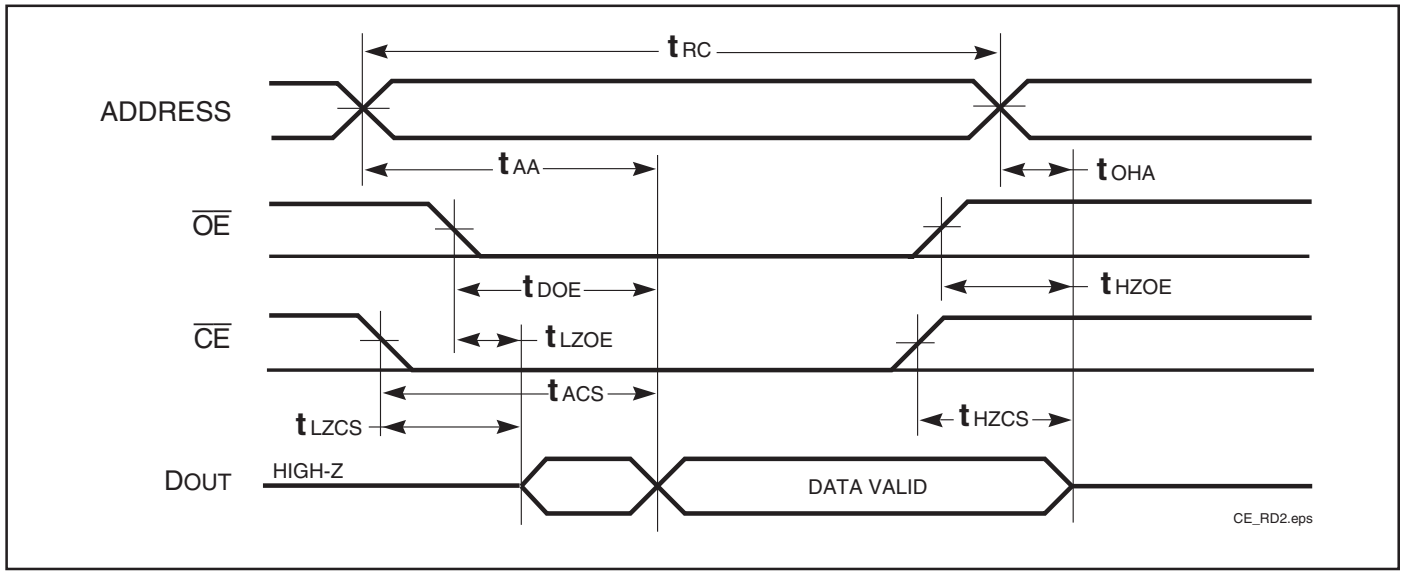

Notes:
1. $\overline{WE}$ is HIGH for a Read Cycle.
2. The device is continuously selected. $\overline{OE}$, $\overline{CE}$ = V_{IL}.
3. Address is valid prior to or coincident with $\overline{CE}$ LOW transitions.

WRITE CYCLE SWITCHING CHARACTERISTICS[1,3] (Over Operating Range)

Symbol	Parameter	-10 ns Min.	-10 ns Max	-12 ns Min.	-12 ns Max.	Unit
t_{WC}	Write Cycle Time	10	—	12	—	ns
t_{SCS}	$\overline{CE}$ to Write End	9	—	10	—	ns
t_{AW}	Address Setup Time to Write End	9	—	10	—	ns
t_{HA}	Address Hold from Write End	0	—	0	—	ns
t_{SA}	Address Setup Time	0	—	0	—	ns
t_{PWE1}	$\overline{WE}$ Pulse Width ($\overline{OE}$ LOW)	9	—	9	—	ns
t_{PWE2}	$\overline{WE}$ Pulse Width ($\overline{OE}$ HIGH)	8	—	8	—	ns
t_{SD}	Data Setup to Write End	7	—	7	—	ns
t_{HD}	Data Hold from Write End	0	—	0	—	ns
t_{HZWE}[2]	$\overline{WE}$ LOW to High-Z Output	—	6	—	6	ns
t_{LZWE}[2]	$\overline{WE}$ HIGH to Low-Z Output	0	—	0	—	ns

Notes:
1. Test conditions assume signal transition times of 3 ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V and output loading specified in Figure 1.
2. Tested with the load in Figure 2. Transition is measured ±500 mV from steady-state voltage. Not 100% tested.
3. The internal write time is defined by the overlap of $\overline{CE}$ LOW and $\overline{WE}$ LOW. All signals must be in valid states to initiate a Write, but any one can go inactive to terminate the Write. The Data Input Setup and Hold timing are referenced to the rising or falling edge of the signal that terminates the write.

AC WAVEFORMS
WRITE CYCLE NO. 1 ($\overline{WE}$ Controlled)[1,2]

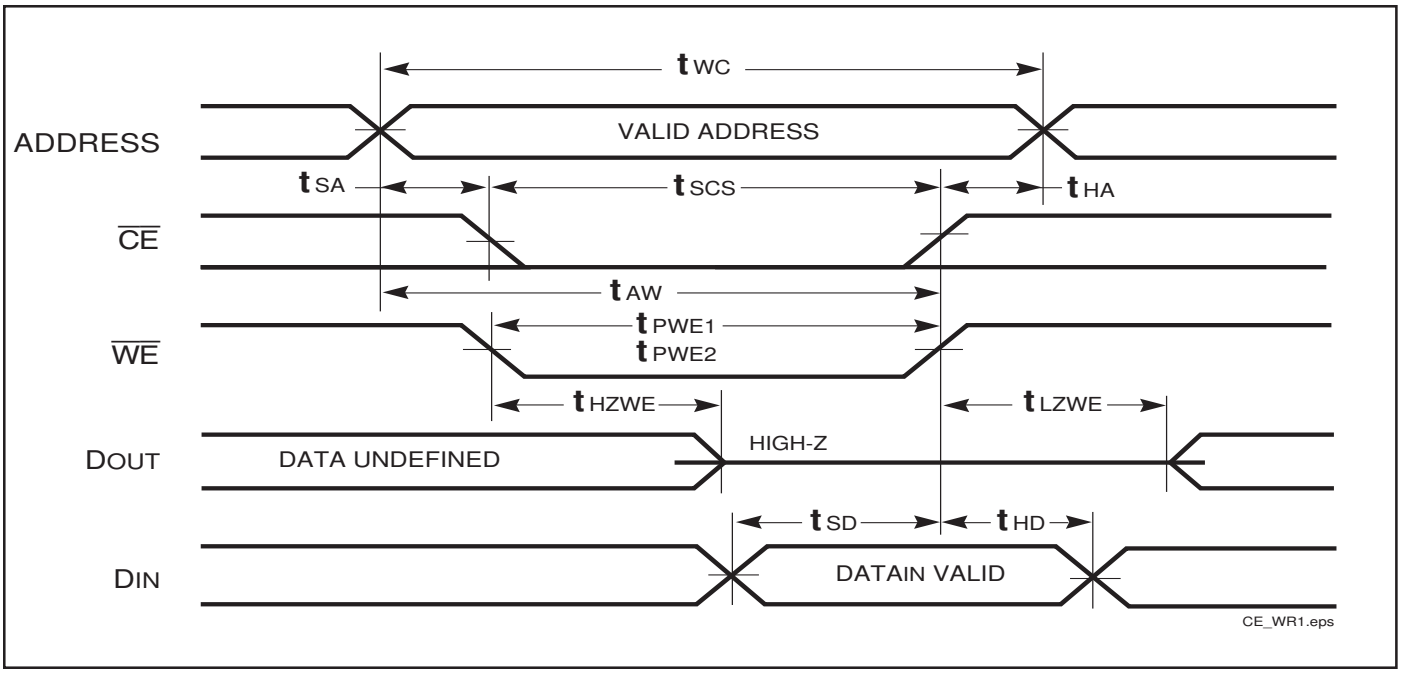

WRITE CYCLE NO. 2 ($\overline{OE}$ is HIGH During Write Cycle) [1,2]

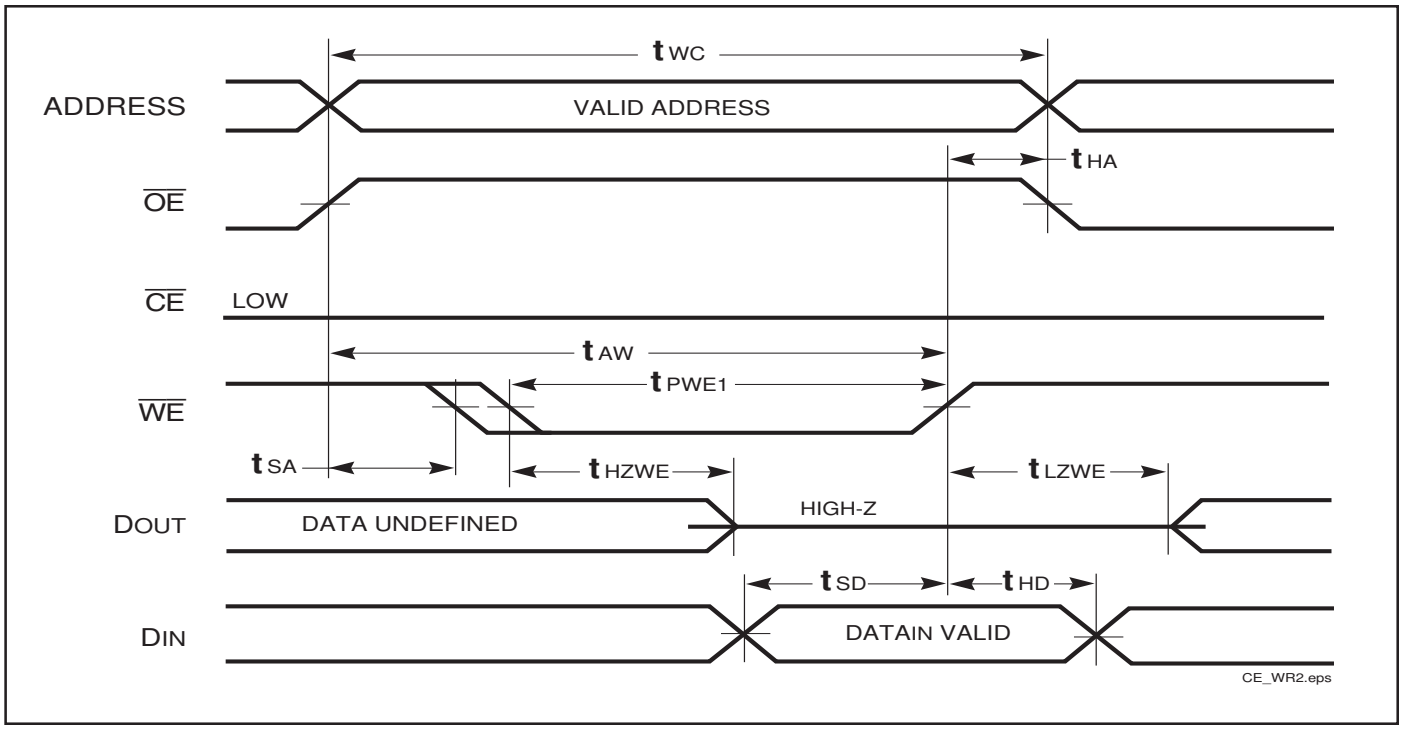

WRITE CYCLE NO. 3 ($\overline{OE}$ is LOW During Write Cycle) [1]

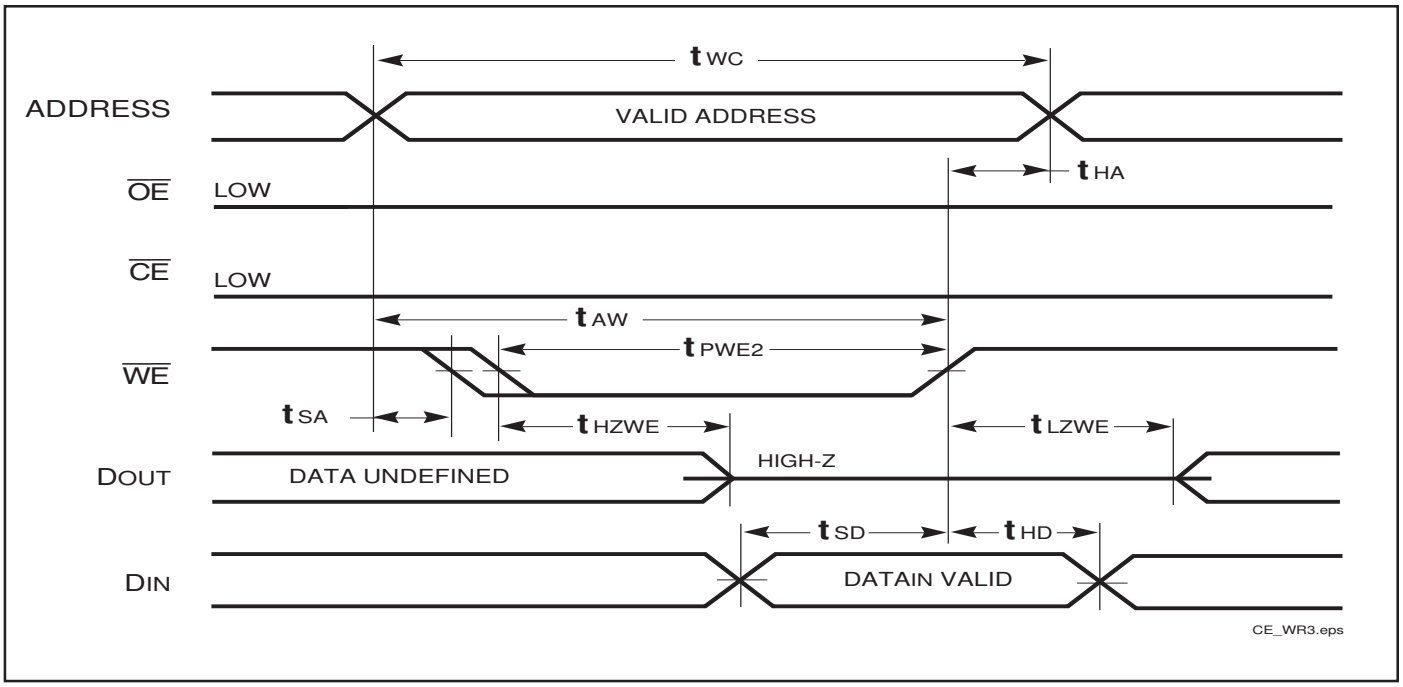

Notes:

1. The internal write time is defined by the overlap of $\overline{CE}$ LOW and $\overline{WE}$ LOW. All signals must be in valid states to initiate a Write, but any one can go inactive to terminate the Write. The Data Input Setup and Hold timing are referenced to the rising or falling edge of the signal that terminates the Write.
2. I/O will assume the High-Z state if $\overline{OE} \geq V_{IH}$.

DATA RETENTION SWITCHING CHARACTERISTICS

Symbol	Parameter	Test Condition		Min.	Typ.(1)	Max.	Unit
V_{DR}	V_{DD} for Data Retention	See Data Retention Waveform		2.0		5.5	V
I_{DR}	Data Retention Current	V_{DD} = 2.0V, $\overline{CE} \geq V_{DD} - 0.2V$	Com.	—	50	90	µA
		$V_{IN} \geq V_{DD} - 0.2V$, or $V_{IN} \leq V_{SS} + 0.2V$	Ind.	—		100	
t_{SDR}	Data Retention Setup Time	See Data Retention Waveform		0		—	ns
t_{RDR}	Recovery Time	See Data Retention Waveform		t_{RC}		—	ns

Note:

1. Typical Values are measured at V_{DD} = 5V, T_A = 25°C and not 100% tested.

DATA RETENTION WAVEFORM ($\overline{CE}$ Controlled)

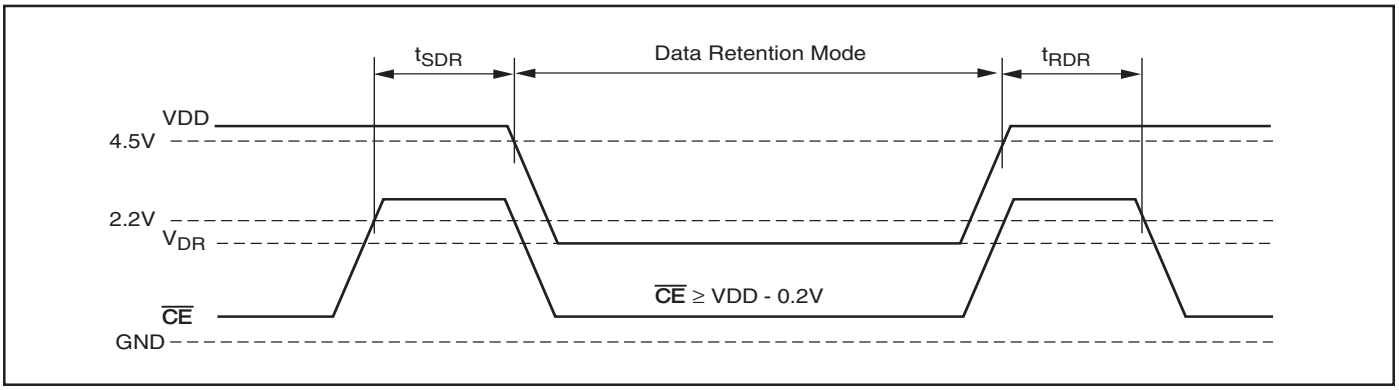

ORDERING INFORMATION: IS61C256AL

Commercial Range: 0°C to +70°C

Speed (ns)	Order Part Number	Package
10	IS61C256AL-10TL	TSOP (Type 1), green
12	IS61C256AL-12TL	TSOP (Type 1), green

Industrial Range: –40°C to +85°C

Speed (ns)	Order Part Number	Package
12	IS61C256AL-12TLI	TSOP (Type 1), green

Note: All products listed above are green. This refers to the package being (RoHS Compliant, Halogen-free) and TSCA Compliant.

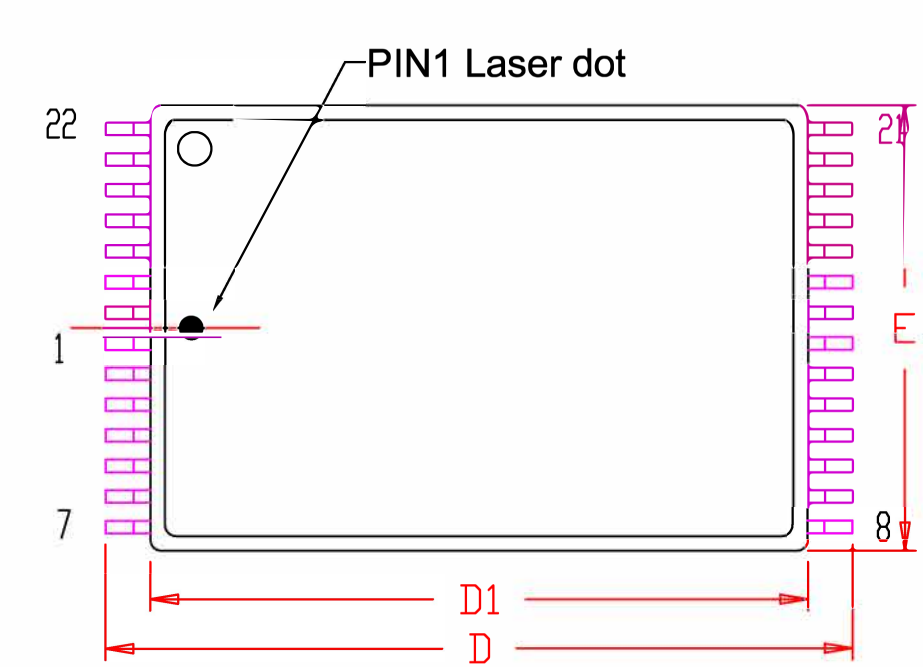

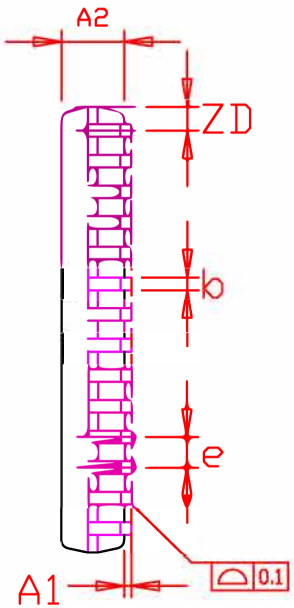

SYMBOL	DIMENSION IN MM			DIMENSION IN INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.95		1.20	0.037		0.047
A1	0.05		0.20	0.002		0.008
A2	0.90		1.05	0.035		0.041
b	0.17	0.22	0.27	0.007	0.009	0.011
D	13.20	13.40	13.60	0.520	0.528	0.535
D1	11.70	11.80	11.90	0.461	0.465	0.469
E	7.90	8.00	8.10	0.311	0.315	0.319
e	0.55 BSC.			0.022 BSC.		
L	0.30	0.50	0.70	0.012	0.020	0.028
L1	0.25 BSC.			0.010 BSC.		
ZD	0.425 REF.			0.017 REF.		
Θ	0	3°	5°	0	3°	5°
C	0.12		0.21	0.12		0.21

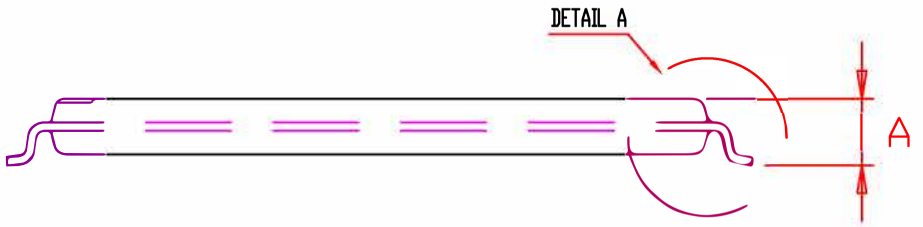

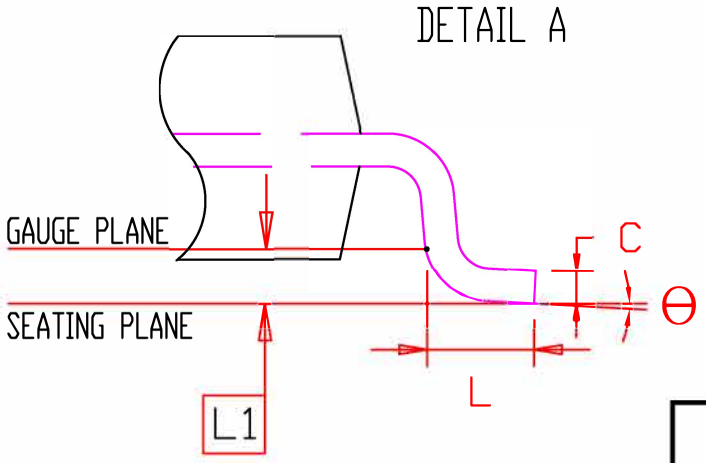

NOTE :

1. CONTROLLING DIMENSION : MM
2. DIMENSION D1 AND E DO NOT INCLUDE MOLD PROTRUSION.
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION/INTRUSION.
4. Referedce Document : JEDEC MO-183

ISSI	TITLE	28L 8x13.4mm TSOP-1 Package Outline	REV.	G	DATE	10/28/2019