

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	

APPROVED: _____

DATE: _____ TITLE: _____

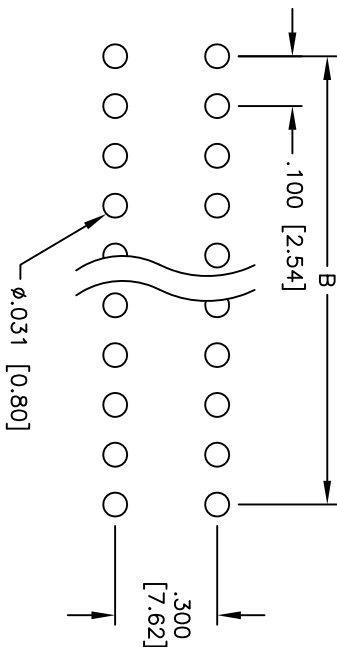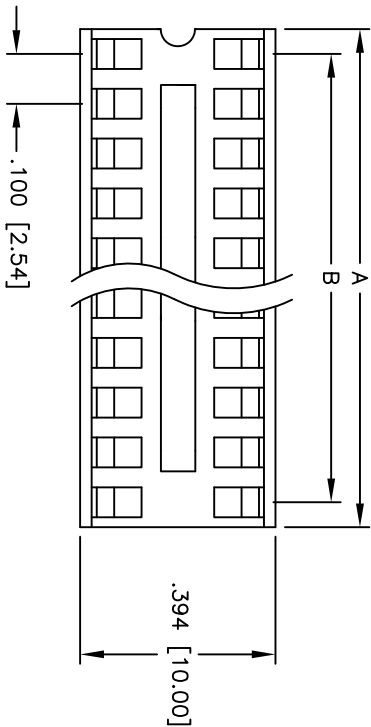

PCB LAYOUT

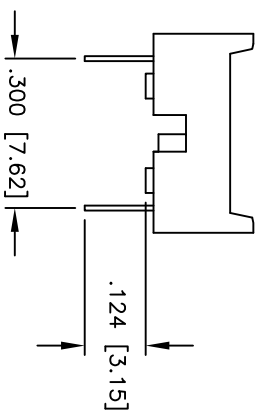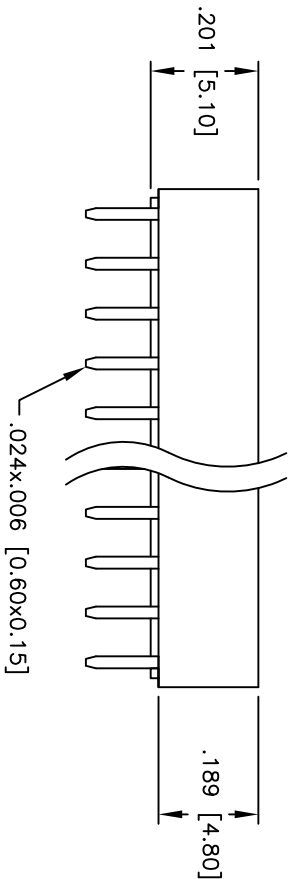

SPECIFICATIONS:

Material:

Insulator: PBT, Glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 20 mohms max initial

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 6, 8, 14, 16, 18, 20, 22, 24, 28, & 32
A = .100 [2.54] x No. of Positions Per Row
B = .100 [2.54] x No. of Spaces Per Row

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
.X	± .10	ØXX	± .10	.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015	.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE			
DRAWN				SS			
CHECKED				1/28/05			
APPROVED				X			
SIZE				PART NO.			
TITLE				IC SOCKET, .300" ROW SPACING			
TIN PLATED				IC-3XX-T			
REF:				SCALE: NTS			
SHEET 1 OF 1				REV.			

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

A

B

C

D

A

B

C

D

6

5

4

3

2

1