


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECO-10-010249	15MAY2010	HMR	NE
	A2	ECR-22-156505	27JAN2023	KW	MD

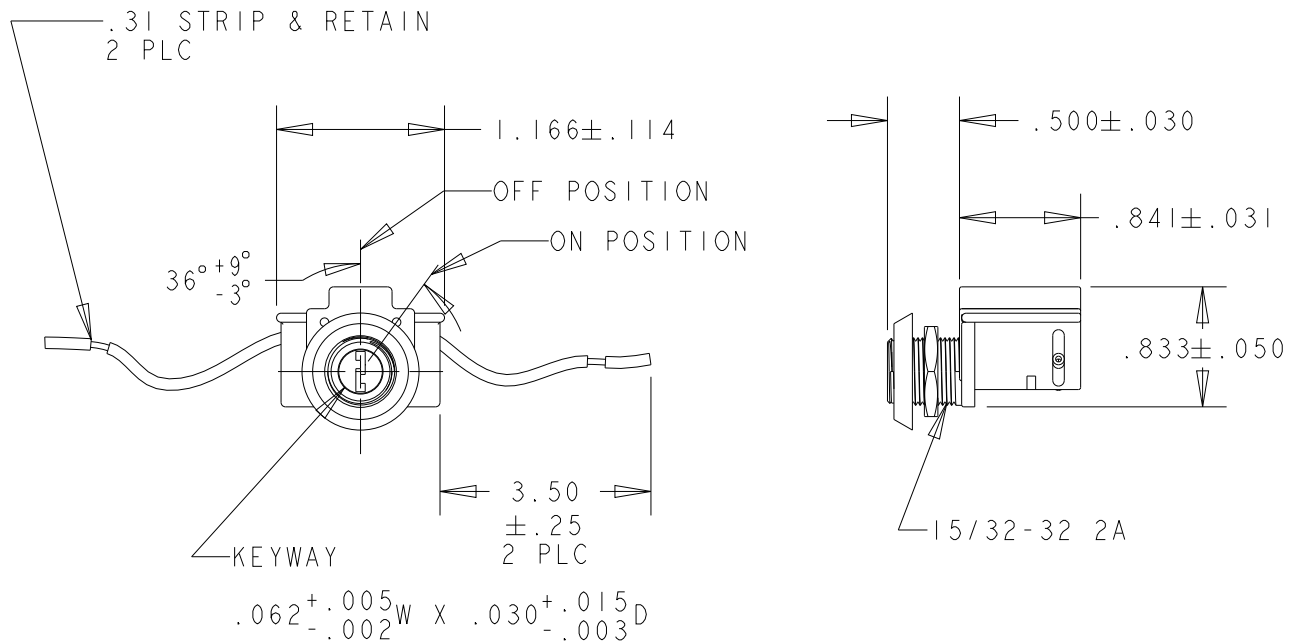


NOTES:

- KEY REMOVABLE BOTH POSITIONS.
- KEYSWITCH SUPPLIED WITH 1 HEX NUT, 1 DRESS NUT AND 1 KEY.
- WIRE: 18 AWG BOND WIRE, TINNED, PVC INSULATED, W/ 80°C AND 300 V RATING (UL 1007).
CONTACT MATERIAL: MOVABLE-BRONZE, SILVER PLATED;
STATIONARY-BRASS, SILVER PLATED.
CIRCUIT: SPST
ACTION: OFF-ON
- ELECTRICAL SPECIFICATIONS:
KEYSWITCH RATING: 6A, 125V AC; 3A, 250V AC
DIELECTRIC VOLTAGE: 1000V RMS MIN.
INSULATION RESISTANCE: 100 MΩ MIN.
CONTACT RESISTANCE: 100 mΩ MAX.
CYCLE LIFE: 6000 OPERATIONS MIN.
TEMPERATURE RISE: <30°C AT 6000 OPERATIONS
- ENVIRONMENTAL SPECIFICATIONS:
OPERATING TEMP: -18°C TO 65°C

6 UL/CSA RECOGNITION.

7 TYCO ELECTRONICS LOGO PER TEC-202-36
LOCATED APPROXIMATELY AS SHOWN

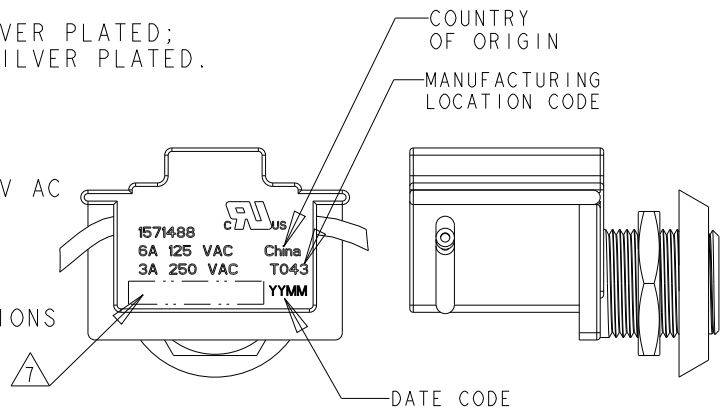

SCALE 6:5

© 2023 TE Connectivity. All Rights Reserved.

1571488-1

PART NUMBER

DIMENSIONS: INCHES		DWN J.C. YOSLER	11NOV2003	MATERIAL -		FINISH -					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK J.C. YOSLER	11NOV2003	TE TE Connectivity							
		APVD M.WILBOURN	07NOV2006								
		PRODUCT SPEC		NAME KEYSWITCH SPST							
		APPLICATION SPEC		SIZE A 4		CAGE CODE 00779		DRAWING NO C-1571488		RESTRICTED TO	
		WEIGHT -									
CUSTOMER DRAWING				SCALE 3:4		SHEET 1		OF 1		REV A2	