



Connectors > Terminal Blocks & Strips > Power Distribution Blocks > DBL Power Distribution Block: Screw clamp technology, 1 to 3 poles



Number of Poles: 3
Current Rating (IEC): 125 A
Current Rating (UL): 115 A
Number of Positions: 8
Contact Current Rating (Max): 125 A

[All DBL Power Distribution Block: Screw clamp technology, 1 to 3 poles \(12\)](#)

Features

Configuration Features

Number of Levels	1
Number of Poles - Output 2	6
Number of Poles - Output 1	1
Number of Poles - Main Circuit	1
Number of Circuits	1
Block Function	Feed-Through
Number of Poles	3
Number of Positions	8

Electrical Characteristics

Power Loss	12 W
Peak Withstanding Current Rating	30 kA
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	1000 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Input Current (Max)	125 A
Dielectric Withstanding Voltage (Max)	2200 V
Voltage Rating (CSA)	1000 V
Voltage Rating (IEC)	1000 VAC



Current Rating (IEC)	125 A
----------------------	-------

Current Rating (UL)	115 A
---------------------	-------

Body Features

Product Weight	367 g[12.945 oz]
----------------	------------------

Primary Product Color	Gray
-----------------------	------

Contact Features

Contact Current Rating (Max)	125 A
------------------------------	-------

Termination Features

Termination Method to Wire & Cable	Screw
------------------------------------	-------

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
------------------------	-------------------

Tightening Torque - Output 2	2 – 3 Nm
------------------------------	----------

Tightening Torque - Main Circuit	31 – 44 in-lbs
----------------------------------	----------------

Tightening Torque - Output 1	18 – 26.5 in-lbs
------------------------------	------------------

Connector Mounting Type	DIN Rail
-------------------------	----------

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Output 2 Capacity - 1 Rigid Stranded Conductor	14 – 6 AWG
--	------------

Output 1 Capacity - 1 Rigid Stranded Conductor	10 – 6 AWG
--	------------

Tool Size - Output 1	3 mm[.118 in]
----------------------	---------------

Output 2 Capacity - 1 Insulated Ferrule	14 – 6 AWG
---	------------

Wire Stripping Length - Main Circuit	15 mm[.591 in]
--------------------------------------	----------------

Output 1 Capacity - 1 Insulated Ferrule	14 – 6 AWG
---	------------

Tool Size - Output 2	5.5 mm[.217 in]
----------------------	-----------------

Product Depth	50.7 mm[1.788 in]
---------------	-------------------

Product Spacing	84.6 mm[3.33 in]
-----------------	------------------

Hole Diameter - Output 2	6.5 mm[.256 in]
--------------------------	-----------------

Hole Diameter - Output 1	6.8 mm[.267 in]
--------------------------	-----------------

Hole Diameter - Main Circuit	9.8 mm[.386 in]
------------------------------	-----------------

Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	8 – 2 AWG
--	-----------



Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	10 – 35 mm²
Wire Stripping Length - Output 1	11 mm[.43 in]
Product Width	84.6 mm[2.984 in]
Product Height	75 mm[2.645 in]
Wire Stripping Length - Output 2	11 mm[.43 in]
Tool Size - Main Circuit	4 mm[.157 in]
Wire Size	2 AWG

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards

IP Rating	IP20
Tool - Main Circuit	Allen Key
Tool - Output 2	Positive Drive Flat Screwdriver
Tool - Output 1	Allen Key
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Pb (3.5% in 3441353) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1SNK900002R0000
BAZ1

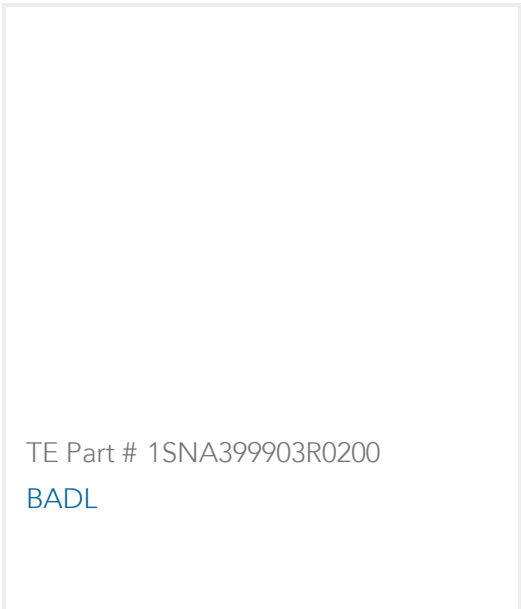

TE Part # 1SNA399903R0200
BADL



TE Part # 1SNK900001R0000
BAM4



TE Part # 1SNK149999R0000
MC512PA



TE Part # 1SNK140000R0000
MC512



TE Part # 1SNK149002R0000
MC512PA L1-L2-L3-N-PE (x20) Vertical



TE Part # 1SNK900102R0000
BAZH1



TE Part # 1SNA116900R2700
BADH

Customers Also Bought



TE Part #806179-SF
FN3270H-10-44



TE Part #DT04-4P-E008
REC, 4P, GRY, N, XCAP



TE Part #1SNL317510R0000
DBL175



TE Part #CAT-P592-R472A
PIDG Ring Tongue Terminals



TE Part #63011-1
250 FASTON FLAG REC 18-14 AWG
BR

TE Part #1-1337524-0
BNC Plg DCap & Chn Nickel Pltd

TE Part #8-1393211-6
T92S11A22-24

TE Part #1-1969614-8
18P RCPT VAL-U-LOK V0

TE Part #2238238-4
2D RING TONGUE, 10, AWG 24-14,
TPBR

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNL312530R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNL312530R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNL312530R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ENTRELEC DBL Power Distribution Blocks Catalogue

French

ENTRELEC DBL Power Distribution Blocks Catalogue

English

Entrelec Compact Power Block

English

DBL125

English

ENTRELEC Terminal Block - Master Catalog

ENTRELEC Terminal Block - Master Catalog

English

1SNL312530R0000

3 Pole, 115 A Current Rating (UL), 8 Position, DIN Rail, -55 – 110 °C [-67 – 230 °F],
Power Distribution Blocks



[ENTRELEC Compact Power Block](#)

English

[DBL Power-Distribution-Blocks](#)

English

[Essential Entrelec Terminal Blocks](#)

French

[Essential Entrelec Terminal Blocks](#)

English

[Essential Entrelec Terminal Blocks](#)

Japanese

[Agency Approvals](#)

[UL](#)

English