





Rev	AWO #	Description	Date	Appr
-		RELEASED	1/13/05	

APPROVED: _____

DATE: _____ TITLE: _____

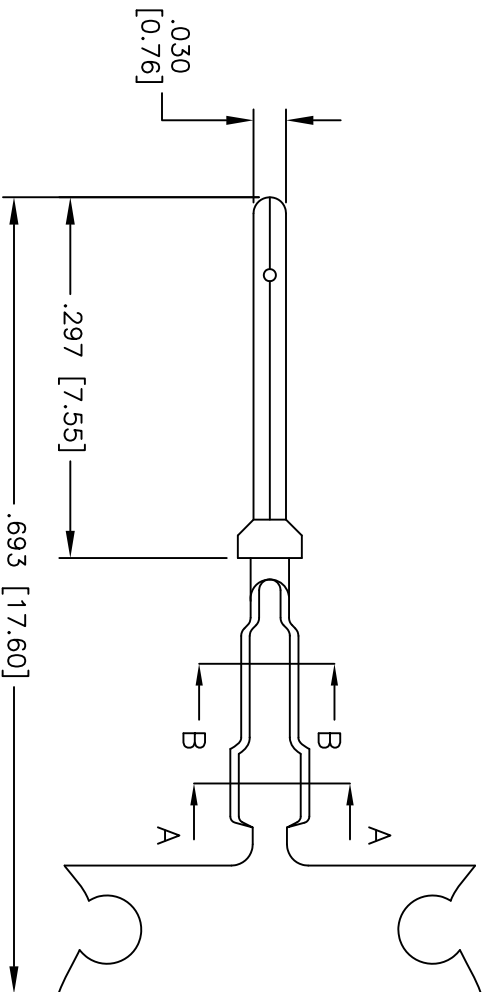

SEC A-A

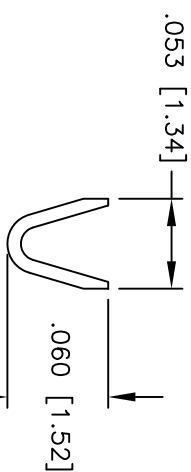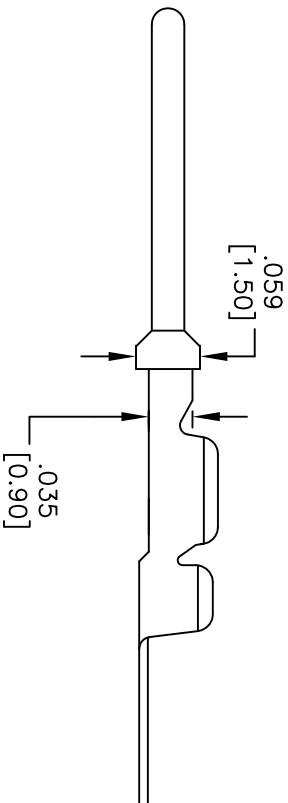

SEC B-B

SPECIFICATIONS:

Material:

Contact: Phosphor Bronze

Plating:

Gold flash over Nickel underplate

Electrical:

Operating voltage: 250 VAC max

Current rating: 5 Amps max

Contact resistance: 20 mohms max initial

Mechanical:

Recommended wire range: 24-26 AWG

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

HIGH DENSITY D-SUB PLUG CONTACT

24-26 AWG

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLDERS		DATE	
.X	± .10	ØX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS					
DRAWN	SS	1/13/05			
CHECKED					
APPROVED					
TITLE		SIZE		REV.	
HIGH DENSITY D-SUB PLUG CONTACT		X		-	
24-26 AWG		PART NO.			
		HDCP-01-R			
REF:		SCALE: NTS		SHEET 1 OF 1	