




Connectors > Contacts > Connector Contacts > D-Sub Connector Contacts: Pin, Brass, Signal, Size 20

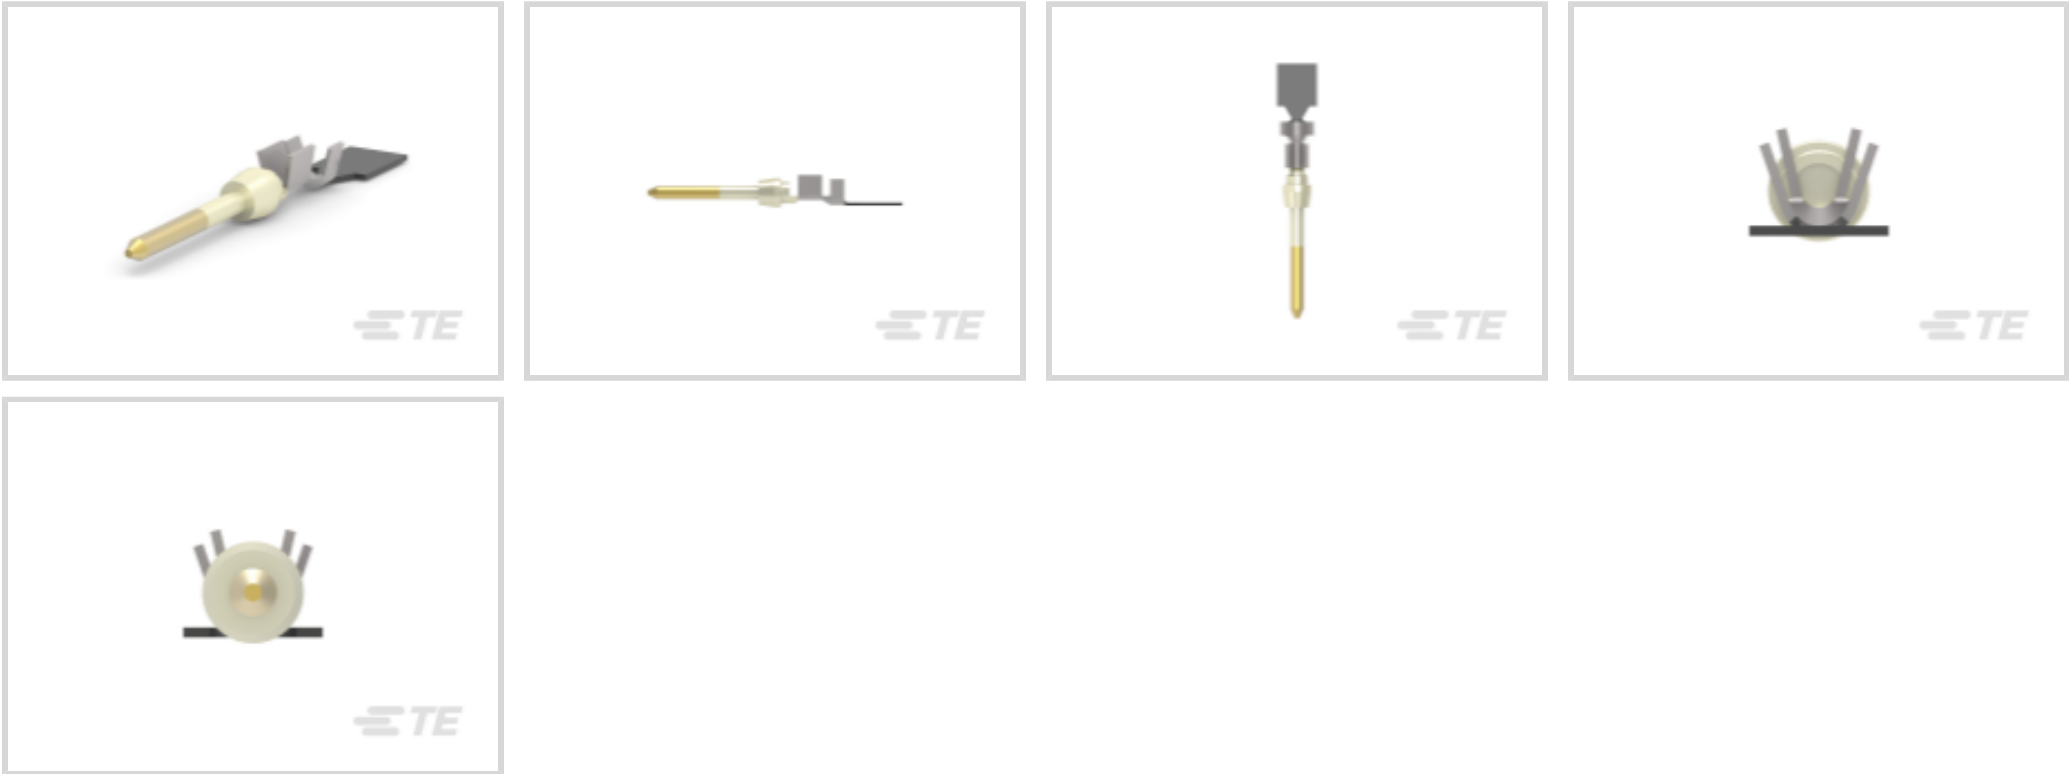

Contact Type: **Pin**
Contact Mating Area Plating Material: **Gold (Au)**
Contact Retention Type Within Housing: **Snap-In**
Contact Size: **Size 20**
Wire Size: **24 – 20 AWG**

[All D-Sub Connector Contacts: Pin, Brass, Signal, Size 20 \(45\)](#)

Features

Contact Features

Contact Underplating Material	Nickel
Mating Pin Diameter	1 mm
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.76 µm
Contact Type	Pin
Contact Mating Area Plating Material	Gold (Au)
Contact Size	Size 20
Contact Base Material	Brass
Contact Current Rating (Max)	2 A

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable



Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Snap-In

Dimensions

Compatible Insulation Diameter Range	1.27 – 1.52 mm[.05 – .06 in]
Wire Size	.2 – .56 mm²

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Identification Marking

Contact Color Code	Red
--------------------	-----

Packaging Features

Packaging Method	Reel
Packaging Quantity	12500

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



TE Part # 1579007-9
EXTRACTION TOOL



TE Part # 91503-1
CCII AMPLIMITE 20 DF PIN SKT 28-20 ASSY

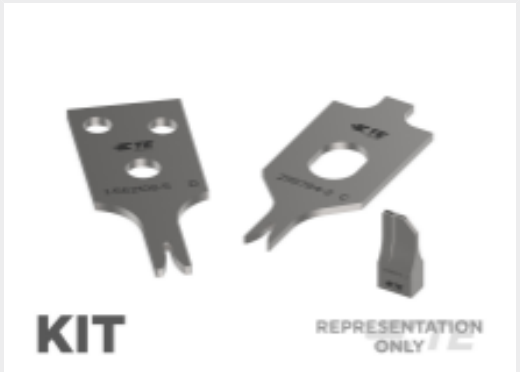

TE Part # 7-2151496-7
OCEAN_2.0_SPARE_PART_KIT-055F062O



TE Part # 5-2151496-2
OCEAN_2.0_APPLICATOR-S-055F062O-RSA



TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp



TE Part # 91285-1
INSERT/EXTRACT TOOL ASSEMBLY



TE Part # 2151496-2
OCEAN_2.0_APPLICATOR-S-055F062OA-RSA




TE Part # 5-2151496-1
OCEAN_2.0_APPLICATOR-S-055F062O-RSM



TE Part # 2151496-1
OCEAN_2.0_APPLICATOR-S-055F062O-RSM

Customers Also Bought

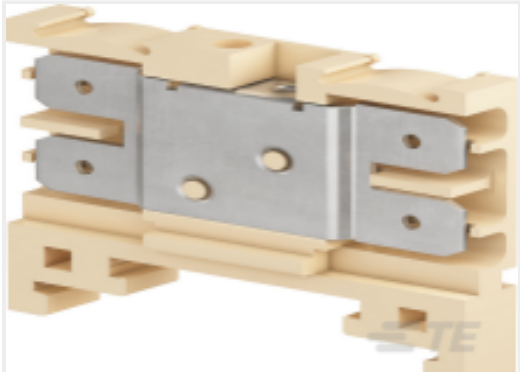

TE Part #1SNA160487R2500
HD2.5/6.2G.2G.1



TE Part #150346-2
110 MINI FASTON, REC., 24-20 AWG, TPBR



TE Part #164531-4
9P.HDP20 REC.ASSY.




TE Part #164533-4
25P.HDP20 REC.ASSY.





TE Part #167292-1
09P.HDP20 PLUG ASSY

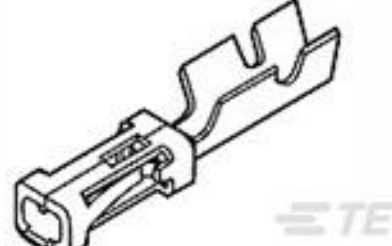

TE Part #167300-8
MOD-4 REC.CONTACT

TE Part #CKA268N00840026042
940 E SPEEDTEC 8POS SINGLE COMPONENTS

TE Part #1SNA094305R2400
CPFT2/5

TE Part #BKA199N00160200000
923 extension speedtec-ready

TE Part #1SNA198352R0700
FEH3-BE

Documents

Product Drawings

COSI PIN CONTACT HD20 DF; 24-20 AWG

English

CAD Files

Customer View Model

ENG_CVM_CVM_166053-1_AB.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_166053-1_AB.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_166053-1_AB.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

AMPLIMITE Subminiature D Connectors - Subminiature D Connectors for Cable Mounting

English

NECTOR_S_LINE_CONNECTOR_BROCHURE

English

Product Specifications

Application Specification

English

166053-1

Gold (Au), Pin Contact, 24 – 20 AWG, .2 – .56 mm² Wire, Snap-In Contact Retention,
Size 20, Crimp, Brass, Signal, -55 – 105 °C [-67 – 221 °F]

