

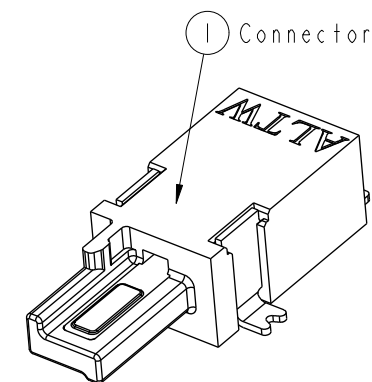
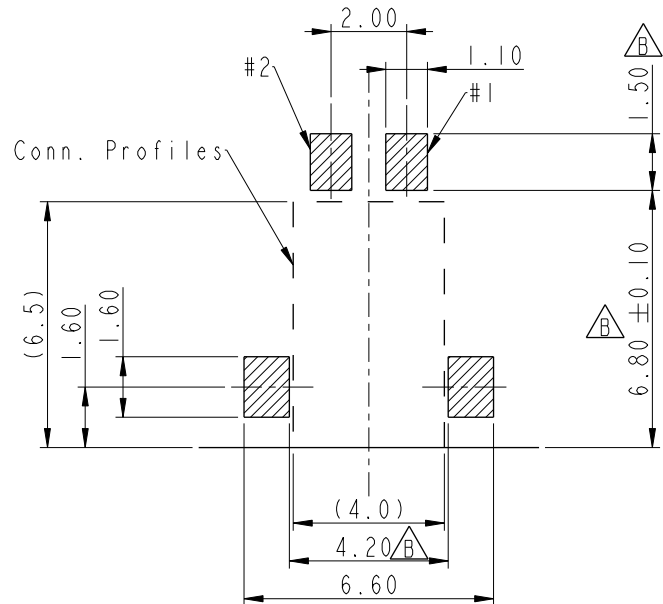
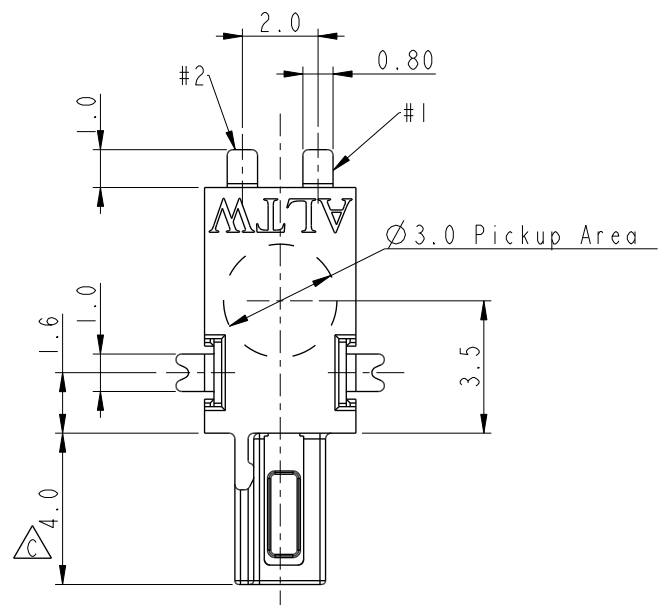


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C191496	2019-08-30	NianPing Yu	Add UL Label
E	C192063	2019-12-03	NianPing Yu	△E X1
F	C220940	2022-06-22	Ruru	△E X3

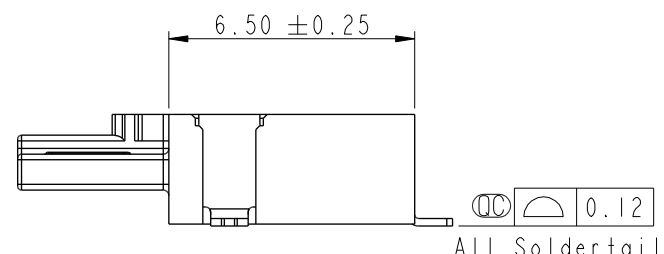


RECOMMENDED P.C.B. LAYOUT
GENERAL TOLERANCE IS ± 0.05

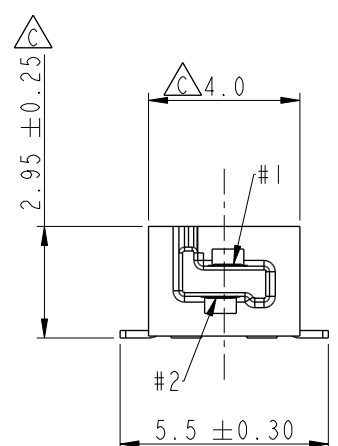

- Notes:
- * Important Dimension To Check.
 - * Housing: High temperature thermoplastic. UL94V-0, color is Natural white.
 - * Terminal: Copper Alloy, Gold Plated on contact area. Tin plated on solder tails.
 - * Solder Peg: Copper Alloy, Tin plated over Nickel.

UNIT:mm				TITLE SSL, 1.1 NON WP, M, 2P SMT R/A W/O POST, NONE		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO SSL11-P2D00-000001		DRAWN BY NianPing Yu		DATE 2019-08-30			
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 5:1		SIZE A4				SHEET 1 OF 2		DWG NO SSL11-P2D00-000001		CHECKED BY Fisher Wang		DATE 2019-08-30	
		REV. F		WC-REV. C.6				QC: Inspection item		CUSTOMER ALTW		APPROVED BY Max Yang		DATE 2019-08-30	
1		2		3		4		5		6		7		8 W10814-03-00001A2	

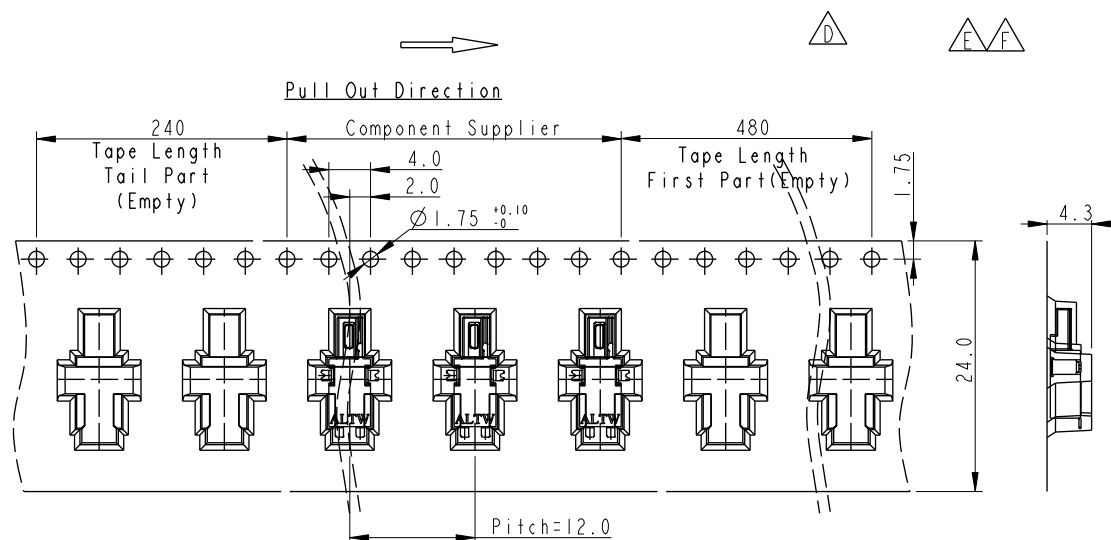


MATERIALS





1. Carrier Tape: Polystyren (PS)
2. Cover Tape: Polystyren (PS)
3. Reel: Polystyren (PS)

QUANTITY


1. 1200Pcs Per Reel
2. 8 Reel Per Carton (9600Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 1.7Kg/Carton.
5. Gross Weight: 6.9Kg/Carton.

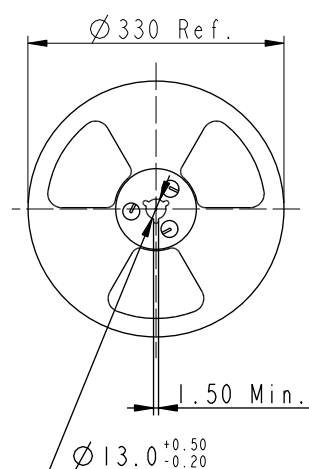

Reel For Carrier Tape

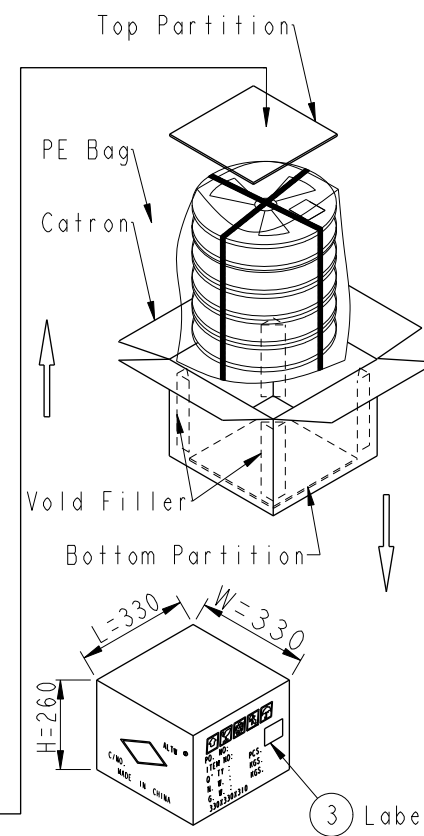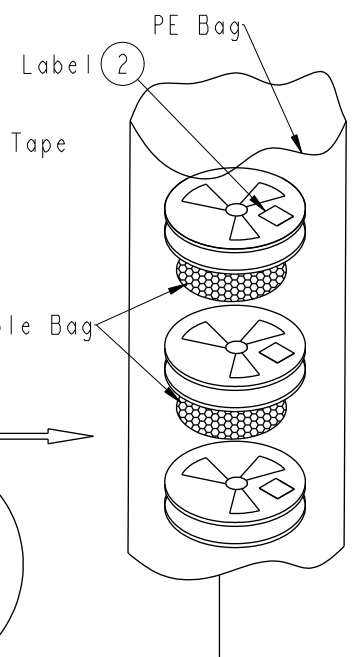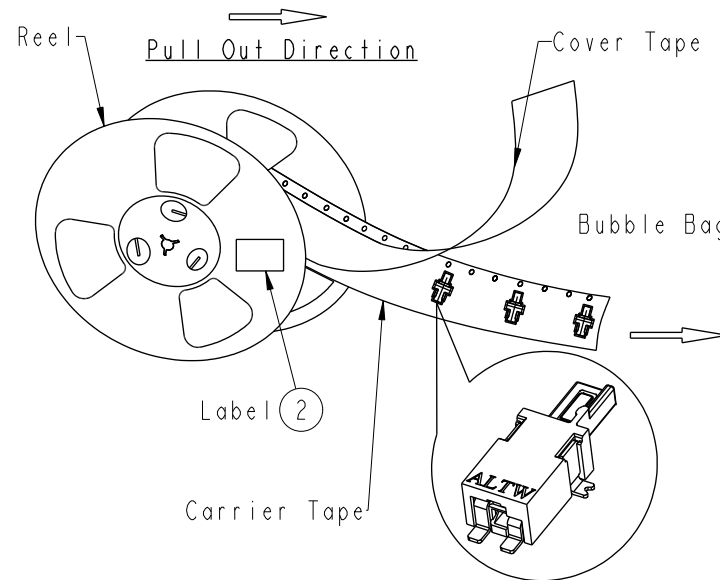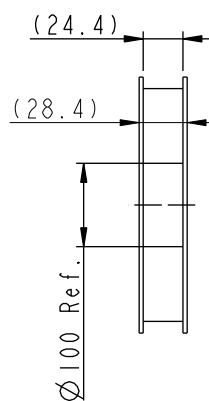

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE

SSL, 1.1 NON WP, M, 2P
SMT R/A W/O POST, NONE

SCALE

5:1

SIZE

A4

SHEET

2

OF

2

REV.

F

WC-REV.

A.8

QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

SSL11-P2D00-000001

DWG NO

SSL11-P2D00-000001

CUSTOMER

ALTW

DRAWN BY

NianPing Yu

CHECKED BY

Fisher Wang

APPROVED BY

Max Yang

DATE

2019-08-30

DATE

2019-08-30

DATE

2019-08-30