




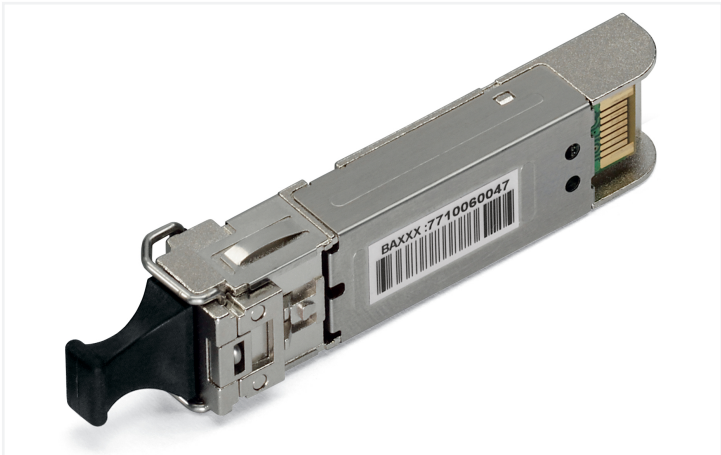


Color: ■ silver-colored

Similar to illustration

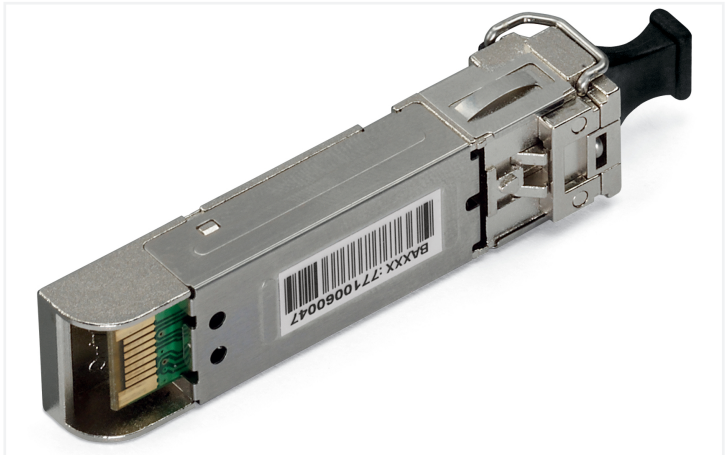

Similar to illustration

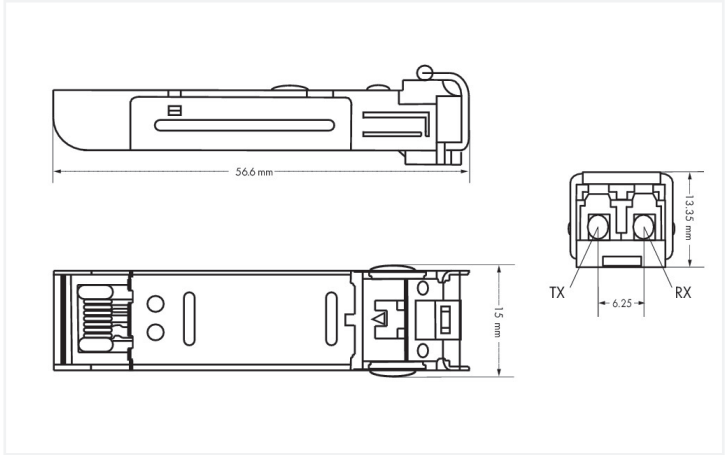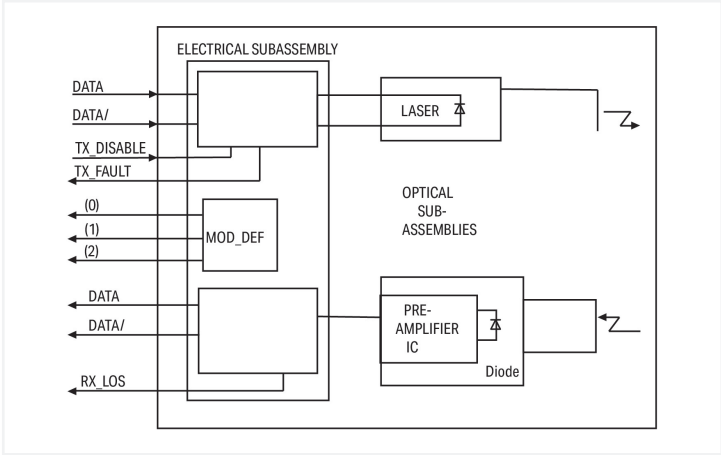

Dimensions in mm

Features:

- Duplex LC optical connector
- Small Form-Factor Pluggable (SFP) industry-standard design
- Compliant with Fast ETHERNET standard
- Differential LVPECL inputs and outputs
- Power supply: 3.3 V
- TTL signal detect indicator
- Hot-pluggable capability

Technical data	
Optical fiber type	Multi-mode
Connection data	
Connection technology: communication/fieldbus	1 x SFP; LC fiber-optic connector
Connection requirement (permissible cable length)	2000 m
Connection requirement (permissible cable type)	Multi-mode fiber 62.5/125 µm, 50/125 µm; Wavelength: 1310 nm



Physical data		
Width		13.4 mm / 0.528 inches
Height		13.3 mm / 0.524 inches
Depth		56.6 mm / 2.228 inches

Mechanical data		
Weight		24 g
Color		silver-colored

Environmental requirements		
Ambient temperature (operation)		-40 ... +70 °C
Ambient temperature (storage)		-40 ... +80 °C
Fire load		0 MJ

Commercial data		
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		TW
GTIN		4045454635404
Customs tariff number		85176200000

Product Classification		
UNSPSC		43201553
eCl@ss 10.0		19-17-01-30
eCl@ss 9.0		19-17-01-06
ETIM 9.0		EC000309
ETIM 8.0		EC000309
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-SFP852

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 852-201/107-002	

Documentation						
System Description		Bid Text				
Industrial Switches – General Product Information	pdf 1873.93 KB		852-201/107-002	09.03.2018		
				doc 25.50 KB		
			852-201/107-002	19.02.2019	xml 3.81 KB	
			ausschreiben.de 852-201/107-002			

CAD/CAE-Data	
CAE data	
EPLAN Data Portal 852-201/107-002	
WSCAD Universe 852-201/107-002	