




All purpose mounting for monitors, touch panels and operating units

This mounting for monitors, touch panels and other operating units is flexible, offers many degrees of freedom and thus can be used universally. Due to compability to RK Connecting Technology as well to the RK Profile System most different connections are realizable.

Ideal range of applications:

- General industrial applications
- Plants and machines
- Control centers
- Ergonomic work stations

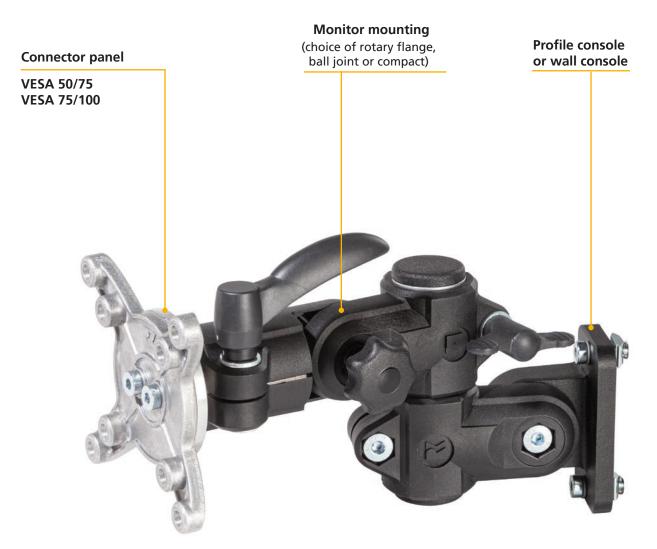

Features

- Choice of user-specific or VESA-standard monitor connection
- High-strength materials guarantee a long-term load-bearing capacity of up to 25 kg, for reliable processes
- Highly ergonomic thanks to personalised height adjustment
- Optimum adjustment of the field of vision thanks to side-turning
- rotary flange and ball joint: vibration-proof locking in 15° increments
- compact: fixing principle with half shells (suitable for retrofitting and extensions) reducing bushes available (round or square 20, 25, 30mm)
- Connects to aluminium profile, and thus also to the machine frame using slot stones
- Universal mounting holes facilitate simple wall mounting

Table of contents




Versions	Rotary flange monitor mountingp. 4
	Ball joint monitor mountingp. 4
	Monitor mounting compactp. 5
	Console monitor mountingp. 6
	Dual-ball monitor mountingp. 7
	Dual-ball pivoting monitor mountingp. 7
Fixing	Wall consolep. 8
	Profile consolep. 8
	Support arm singlep. 9
	Support arm doublep. 10
	Support arm double height adjustable p. 11
	Support arm telescopep.12
	Support arm telescope height adjustable p. 14
Modules	Monitor floor stand adjustablep. 16
	Monitor floor stand stationaryp. 20
Accessories	Adaptor plate VESA 50/75p. 28
	Adaptor plate VESA 75/100p. 28
	Keyboard trayp. 29
	Notebook holderp. 30
	Tablet holderp. 31
	Smartphone holderp. 32
	Lockable steering rollerp.33
	Vario-Quick holding blockp. 33
	Reducing bushesp. 34
	Reducing insertsp. 34
	Clamping leverp. 35
	Cable straps with velcrop. 35
Applications	Monitor Mountingp. 24


Versions

Rotary flange monitor mounting Locking in 15° - steps Code No. Weight max. load 19300030C11 370 g 25 kg 90° *Other cross-sections by reducing bushes (see page 34)

Ball joint monitor mounting

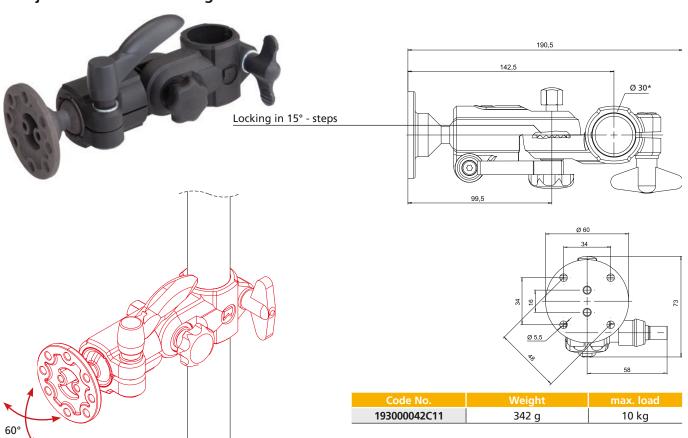



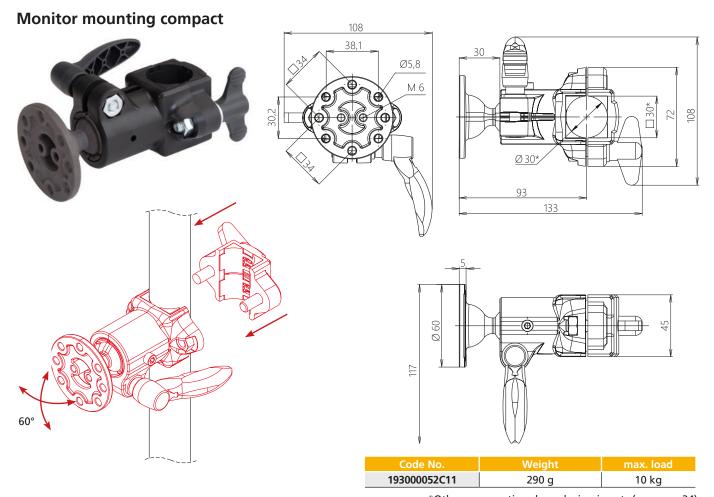







Versions




Console monitor mounting











Code No.	Weight	max. load	
		dynamic	static
193000378C19	284 g	3 kg	10 kg




Dual-ball monitor mounting









Code No.	Weight	max. load	
		dynamic	static
193000368C19	310 g	3 kg	10 kg

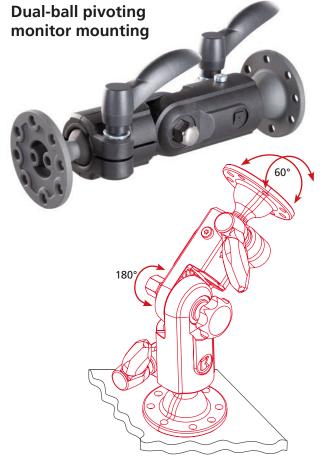







Code No.	Weight	max. load	
		dynamic	static
193000388C19	391 g	3 kg	10 kg

Fixing


Wall console

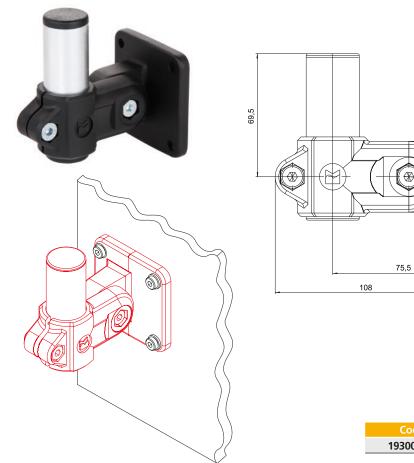





Code No.	Weight
193000358C66	306 g

Profile console






Includes: Complete with fixing set for slot geometry 40



Code No.	Weight
193000298C66	270 g




Support arm single

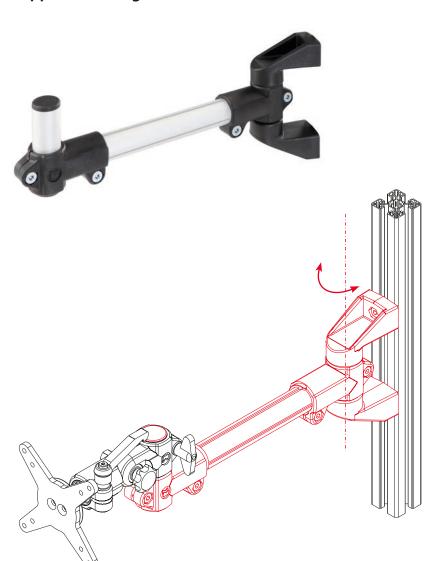


Includes:

Complete with fixing set for slot geometry 40

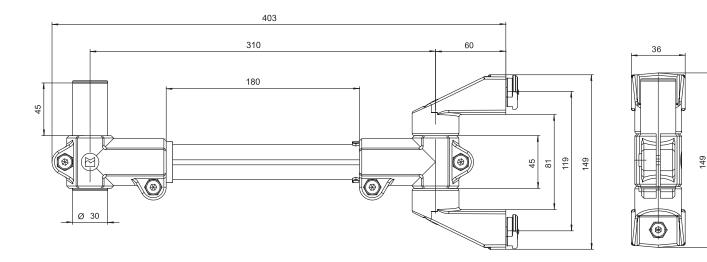

Code No.	Weight	max. load
193000018C66	610 g	10 kg

Fixing

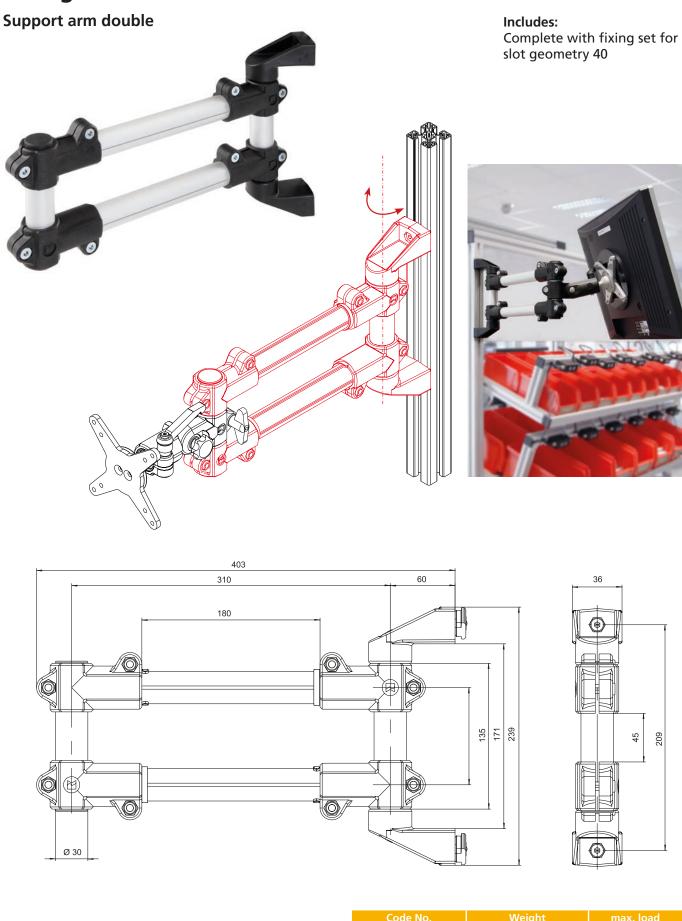


193000028C66

1030 g

25 kg



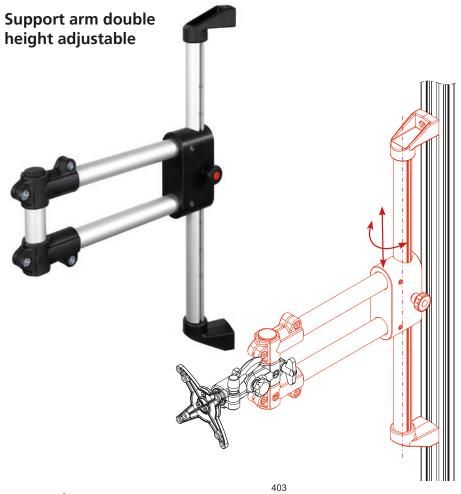


Includes:

Complete with fixing set for slot geometry 40

Features:

Travel 400mm max. (30 mm steps) Toolless manual adjustment Safe locking by a spring-loaded stop bolt

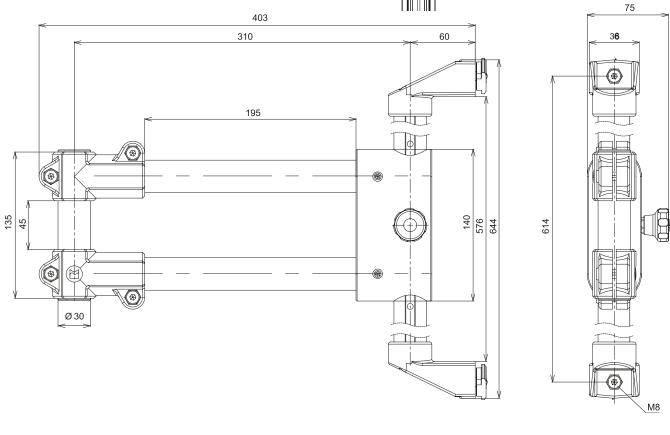

Code No. 193000068C66

2040 g


10 kg


Fixing

Support arm telescope

Includes:Complete with fixing set for slot geometry 40




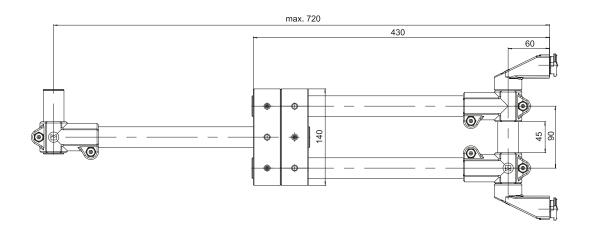


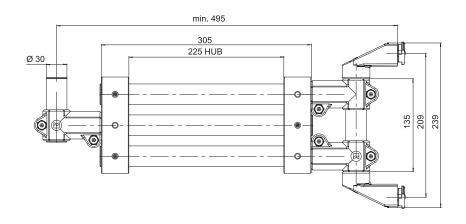


Code No.	Weight	max. load
193000048C66	1610 g	5 kg



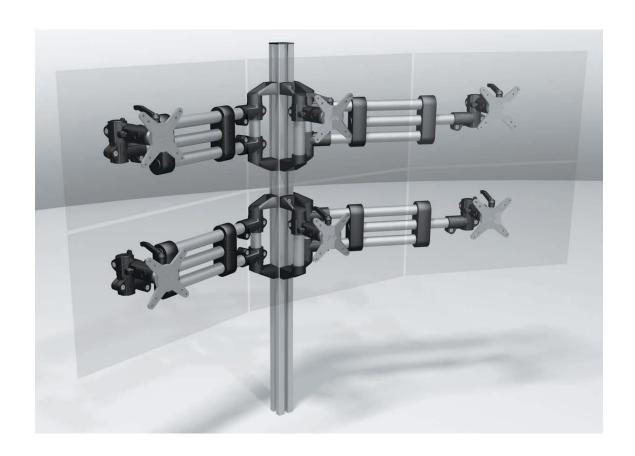

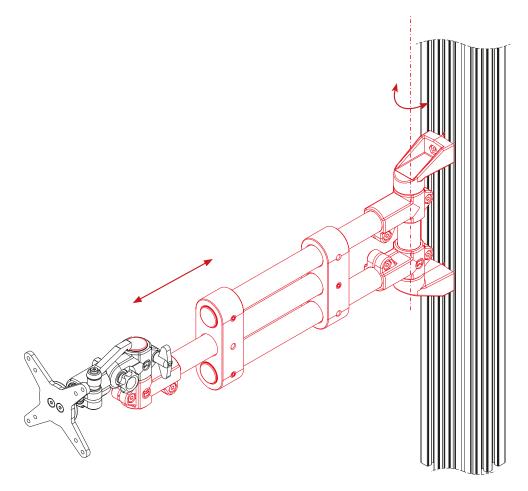

Fixing

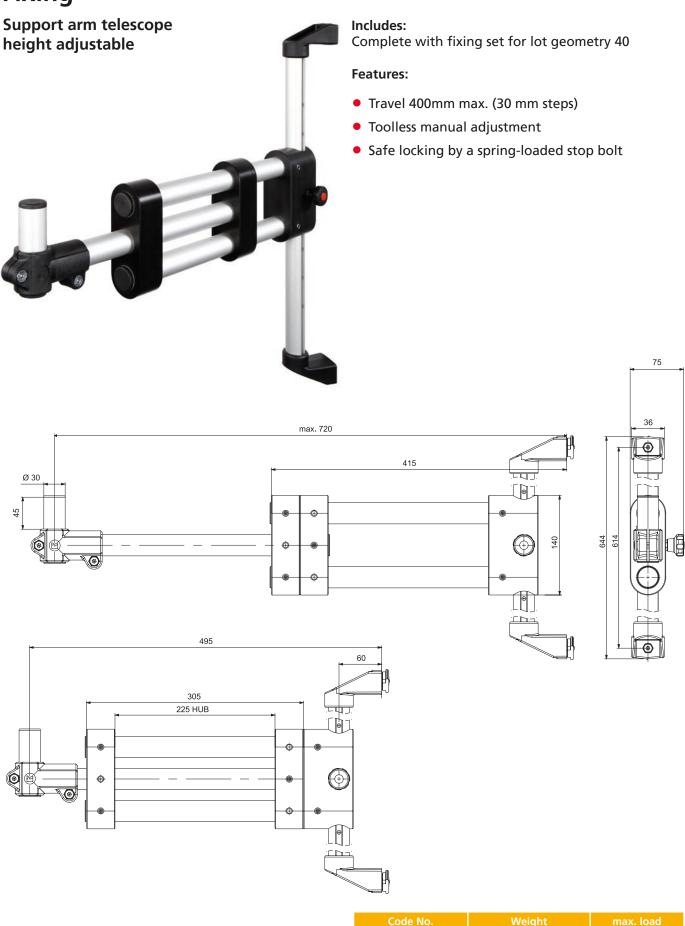


193000058C66

2640 g

5 kg





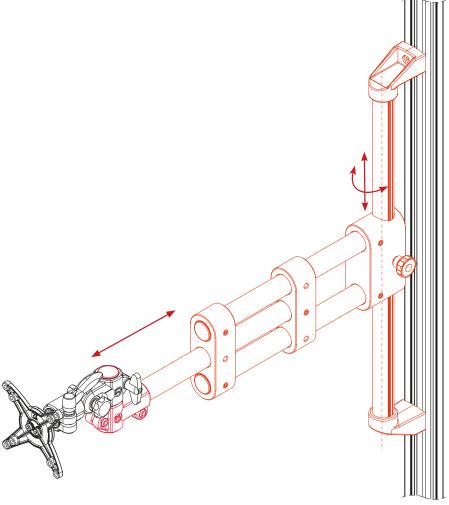

Modules

Monitor floor stand adjustable




Delivery includes: pre-assembled kit

Features:

- Travel 400mm max. (31mm steps)
- Manual adjustment without tools of the work surface with tie rod support
- Safe locking of the height adjustment by spring-loaded locking bolt
- Stable construction with adjustable feet, optionally with swivel castors (page <?>)
- Coated working surface (0,30m²)
- Integrated cable channel
- Mounting for monitor pre-assembled, optionally combinable with all RK monitor mountings




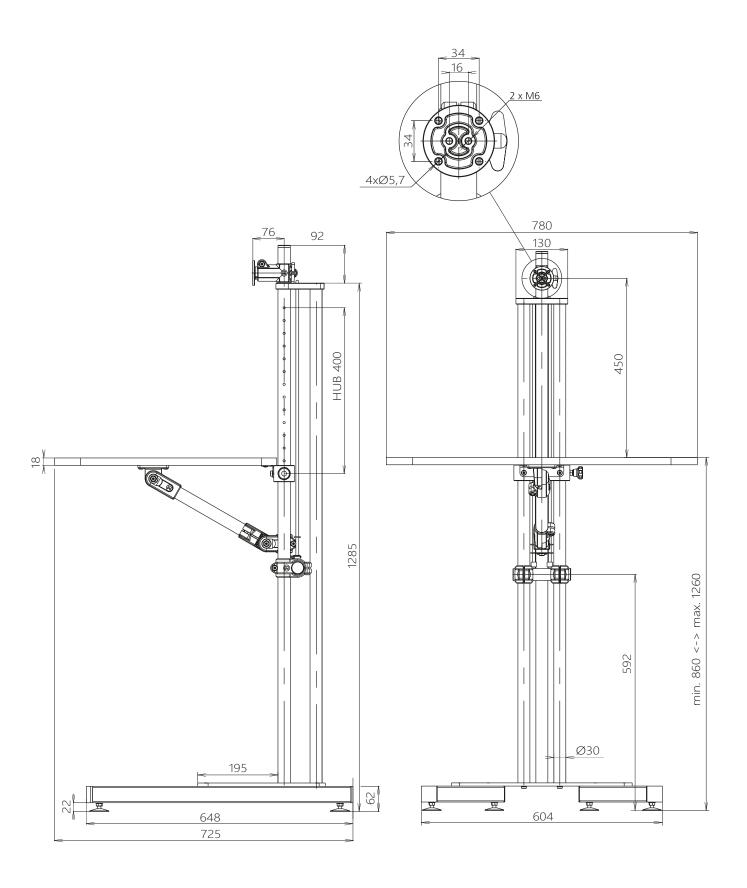

Code No.	Weight
193000078C66	22,2 kg

Modules

Monitor floor stand adjustable

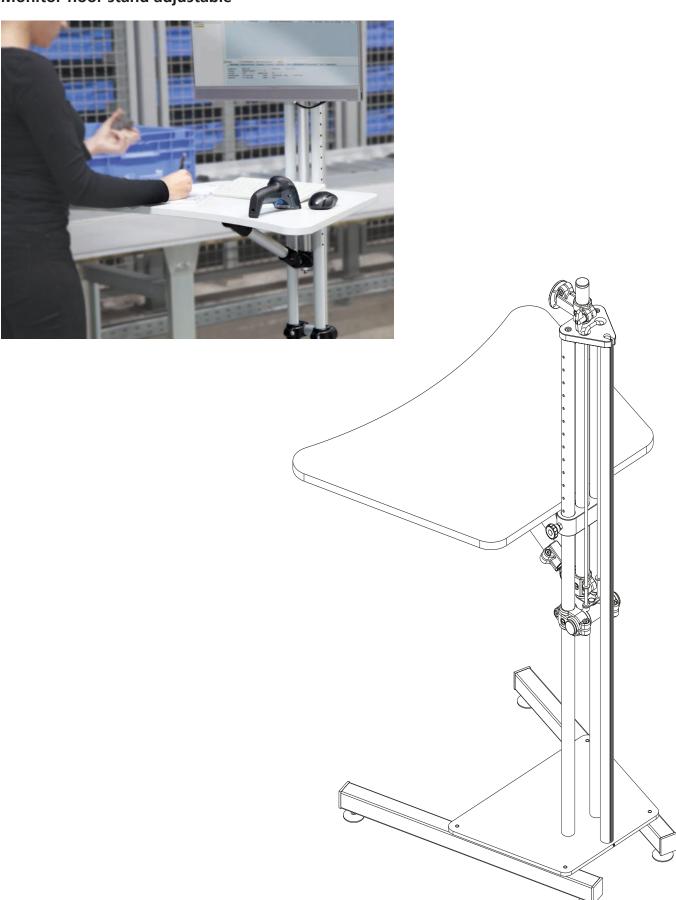





Modules

Monitor floor stand stationary


Features:


 Central column made of high-grade BLOCAN® aluminium profile

 Profile slots (10 mm) make it easy to fasten a range of different modules

 Individual equipping with RK modules e.g. coated table top (0.30 m2), various mounts for monitors, keyboard shelf (height-adjustable), integrated cable channel


 Sturdy aluminium base for stability and durability




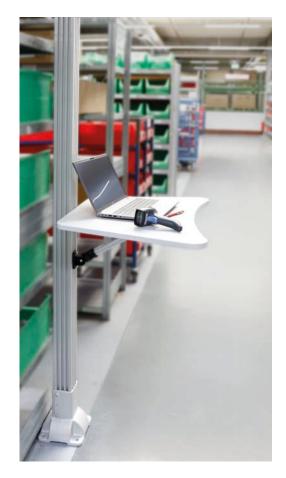




Monitor floor stand stationary with base bracket

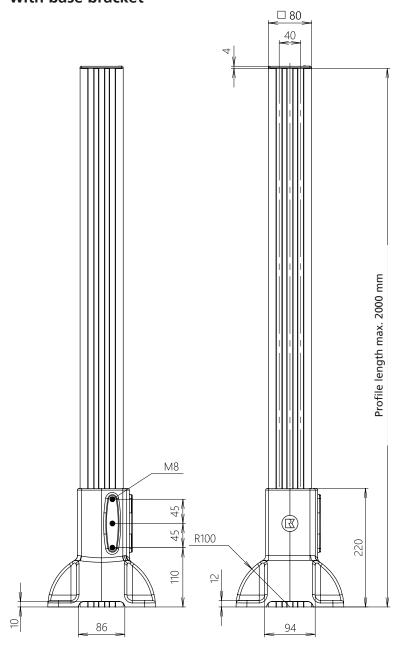



Code No.	Туре	Weight
193000398C66	monitor floor stand stationary	8,791





Code No.	Type	lot sizes
4016611	HLA	4, 8, 12 pcs.

Modules

Monitor floor stand stationary







- Secure mounting for monitor or display device
- Swivelling, rotatable and height-adjustable

Support arm/swivel arm

- Ideal for flexible positioning
- Double, telescoping, height-adjustable (see page 14)





Keyboard tray (see page 29)



Table Top

 Work surface for writing or depositing objects (see page 24)

Cable channel


 Simple and safe routing of supply lines (see page)



Accessories Monitor floor stand stationary

Table top


Scope of delivery: Including fixing kit

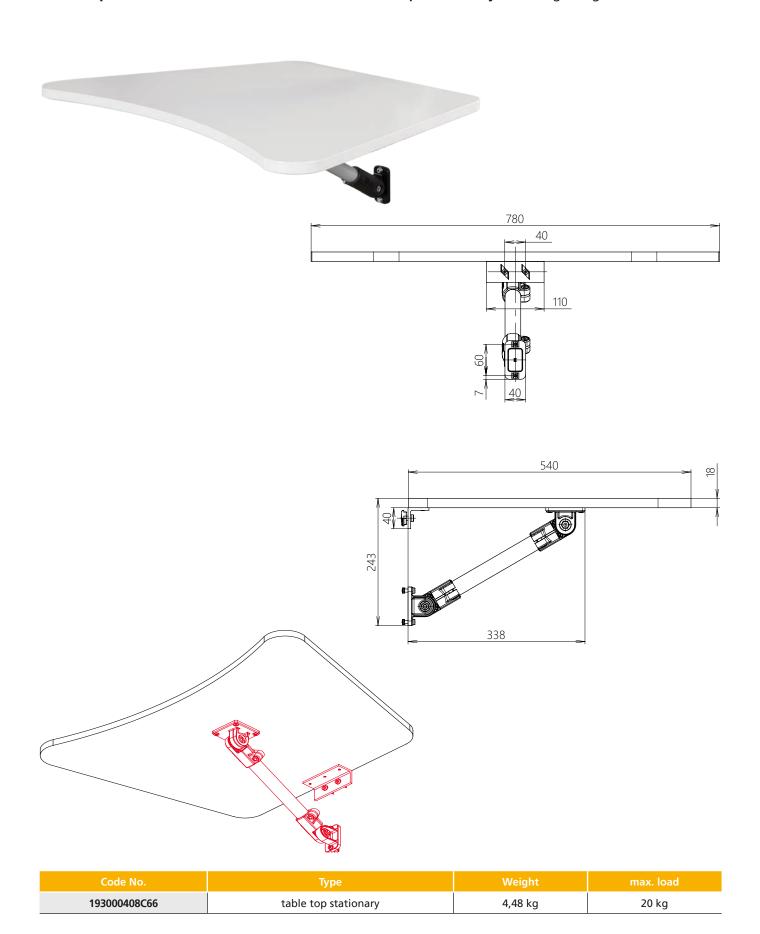



Cable channel





Code No.	Profile	Туре	Weight
4F55A00	KK-40x20, Cut to size as required	Channel with fixing holes	0,609 kg/m


Cable mounting clip

Material: PA-GF30

Assembling the channel

Easy assembly (no profile drilling) with BLOCAN profiles.



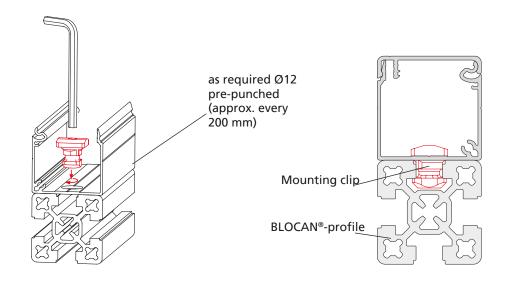

Code No.	for KK-Profile	lot sizes
4E185031	all	10, 20, 30 pcs.

Accessories Monitor floor stand stationary

Order instruction:

 Purchase only in lot sizes and a multiple of that, see product table below

Caps (plastic) for aluminium profile column

• For closing the aluminium profile column



[mm]

Code No.	Type	Α	C	lot sizes
4040421	80x80	80	4	10, 20, 30 pcs.


^{*}More colours, see catalouge "Profile Technology BLOCAN®, page 98

Cover profile for aluminium profile column

 For flush covering the longitudinal grooves in the aluminium profile column
 Material: plastic







Code No.	Туре	Colour
4000570	2 m-bar	Schwarz

^{*}More colours, see catalouge "Profile Technology BLOCAN®, page 101





Application




Accessories


Adaptor plate VESA 50/75

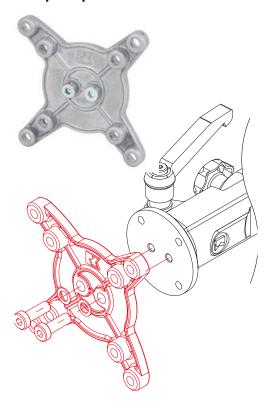

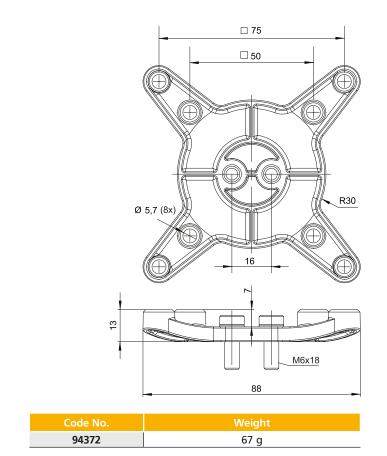


Adaptor plate VESA 75/100

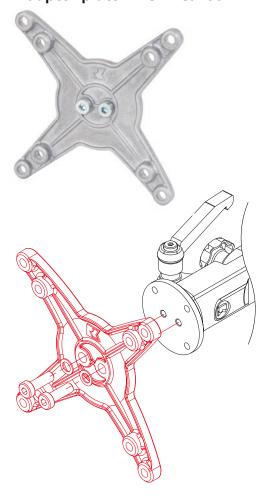

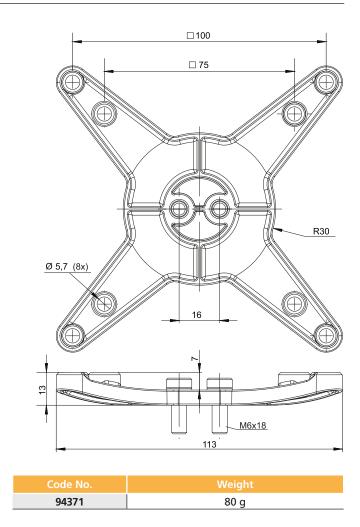




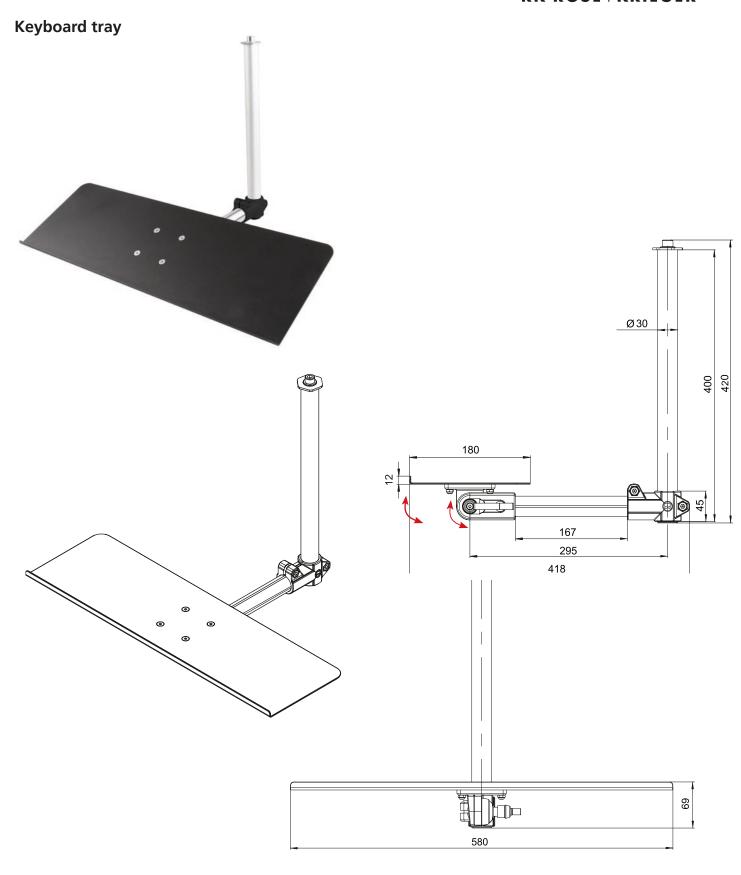

Designed for Support arm double and Support arm double height adjustable

Code No.	Weight
193000038C66	2500 g


Accessories

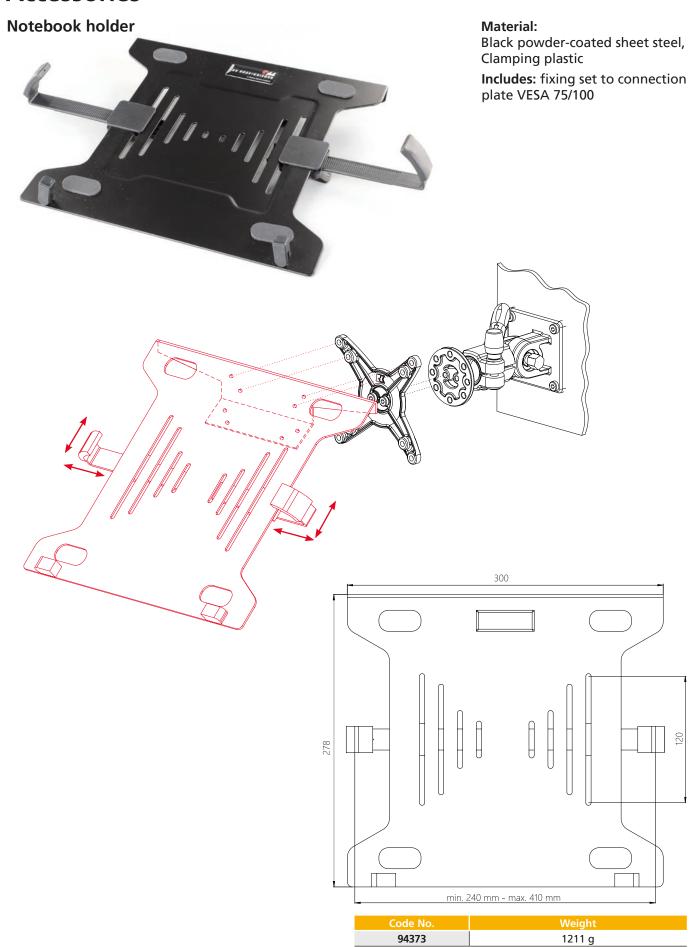





Tablet holder









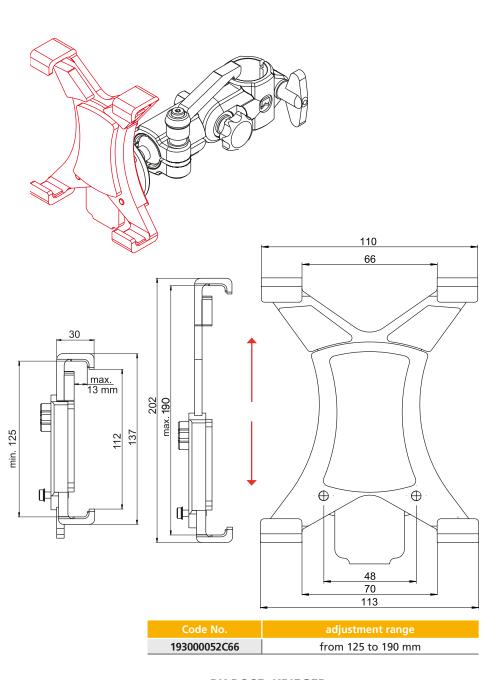

Accessories

Smartphone holder


Delivery includes: including fastening 30 mm round tube and fastening to RK Rose+Krieger Profile system (40 mm groove geometry)




















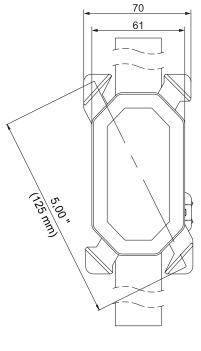

193000038C69 from 125 (5 inch) to 185 (7,25 inch) mm




Lockable swivel castor



Material: galvanized steel

Includes: fixing set for Monitor floor stand adjustable

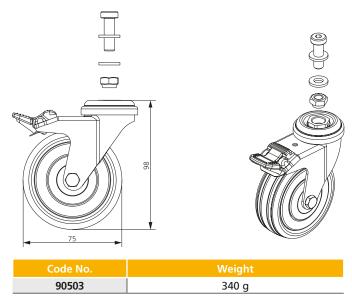


Order instruction:

 Purchase only in lot sizes and a multiple of that, see product table below

- For fixing cables and hoses
- It is possible to insert it into the profile slot retrospectively
 Material: Black plastic

Vario-Quick holding block K/KK

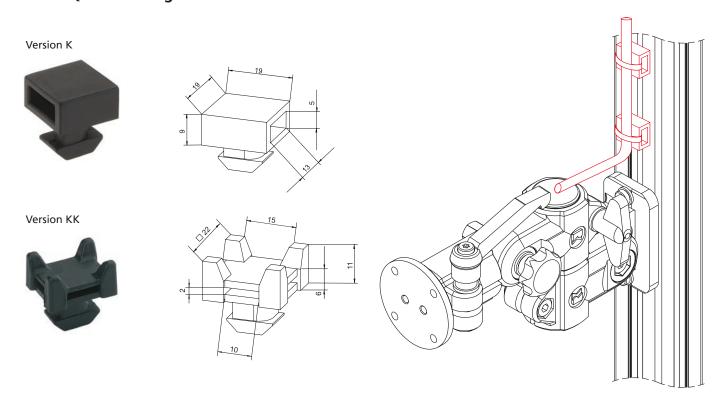


Code No.	Version	lot sizes	Suitable for	
40181251	Holding block K	10, 20, 30 piece	40 slot geometry*	
40181271	Holding block KK	10, 20, 30 piece	40 slot geometry*	


Accessories


Purchase only in lot sizes and a multiple of that, see product table below

Reducing bushes for monitor mounting










Version "R"


[mm]

Code No.	Version	lot sizes	A + 0,1
96204AC	R20	5, 10, 15 piece	20,25
96206AC	R25	5, 10, 15 piece	20,25
96208AC	V20	5, 10, 15 piece	20,25

Reducing inserts for monitor mounting








[mm]

Code No.	Version	lot sizes	A	
963000AC	R20	5, 10, 15 piece	20,25	
963002AC	R25	5, 10, 15 piece	25,25	
963004AC	R30	5, 10, 15 piece	30,25	
963001AC	V20	5, 10, 15 piece	20,25	
963003AC	V25	5, 10, 15 piece	25,25	



Clamping lever



- The clamping lever enables the re- adjustment of the clamping elementp. This can be done by easy exchange of the cylinder screw.
- By lifting the grip, the free movement of the serration toothing enables the clamping lever to wing into the desired position. The grip moves into its original position when released.

Material: Grip made of polyamide black, screws -stainless steel

									[mm]
Code No.	Туре	Α	В	D		Н	K	L	M
902381	20-30	65	35	M8	14	25	13	4	19,5


Order instruction:

Purchase only in pack quantities, see catalogue

Cable straps with velcro







Code No.	Scale of pack quantities		
91815	5, 10, 15 piece		



RK Rose+Krieger GmbH Connecting and positioning systems Potsdamer Straße 9 32423 Minden, Germany +49 571 93 35-0 info@rk-online.de www.rk-rose-krieger.com





Learn more