



Connectors > D-Shaped Connectors



Number of Positions: 3

Connector & Housing Type: **Receptacle**

Connector System: **Cable-to-Cable**

Connector Mounting Type: **Panel Mount**

Connector Shell Size: 2

Features

Product Type Features

|                                   |                |
|-----------------------------------|----------------|
| Connector & Housing Type          | Receptacle     |
| Connector System                  | Cable-to-Cable |
| Connector Shell Size              | 2              |
| Sealable                          | No             |
| Connector & Contact Terminates To | Wire & Cable   |

Configuration Features

|                               |     |
|-------------------------------|-----|
| Number of Positions           | 3   |
| Power/Signal/Coax Combination | Yes |

Body Features

|                                    |                 |
|------------------------------------|-----------------|
| Front Shell Material               | Steel           |
| Mating Retention Feature Material  | Stainless Steel |
| D-Sub Connector Insert Arrangement | 3C3             |
| Rear Shell Plating Material        | Zinc            |
| Rear Shell Material                | Steel           |
| Front Shell Plating Material       | Zinc            |

Contact Features

|              |        |
|--------------|--------|
| Contact Type | Socket |
| Contact Size | Size 8 |



|                              |                  |
|------------------------------|------------------|
| Contact Current Rating (Max) | 32 A             |
| Contact Options              | Order Separately |

Termination Features

|                                    |       |
|------------------------------------|-------|
| Termination Method to Wire & Cable | Crimp |
|------------------------------------|-------|

Mechanical Attachment

|                         |                 |
|-------------------------|-----------------|
| Mounting Hole Diameter  | 3.05 mm[.12 in] |
| Connector Mounting Type | Panel Mount     |
| Mating Alignment        | Without         |

Housing Features

|                    |                  |
|--------------------|------------------|
| Centerline (Pitch) | 2.77 mm[.109 in] |
|--------------------|------------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 125 °C[-67 – 257 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |                |
|---------------------|----------------|
| Circuit Application | Power & Signal |
|---------------------|----------------|

Packaging Features

|                  |         |
|------------------|---------|
| Packaging Method | Package |
|------------------|---------|

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 318813-1  
EXTRACTION TOOL ASSY

Customers Also Bought




TE Part #181949-2  
250 FASTON,TAB,TPBR




TE Part #206433-1  
CPC RECPT ASSEMBLY SIZE 11-8



TE Part #213283-2  
HARDWARE KIT,DRAWER CONN

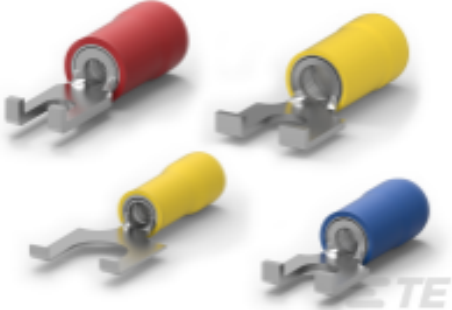


TE Part #CAT-P592-F614  
PIDG Flanged Spade Tongue Terminals

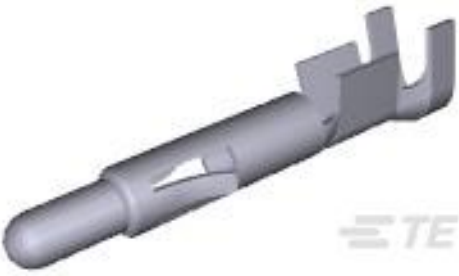

TE Part #350547-3  
UMNL PIN 20-14 PTPPHBZ L/P



TE Part #1-480703-2  
04P UMNL CAP HSG RED

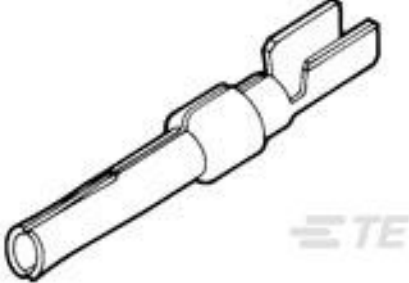

TE Part #745230-4  
20 DF SOCKET CONTACT L.P.



TE Part #5207719-3  
KIT SCREWLOCK FEMALE CLEAR ZIN



TE Part #6609037-9  
20EP1=F7773 S0

Documents



Product Drawings

AMPLIMITE,ASY,RCPT,3C3,COAX

English

CAD Files

Customer View Model

ENG\_CVM\_5-445705-4\_P.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_5-445705-4\_P.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_5-445705-4\_P.2d\_dxf.zip

English

3D PDF

3D

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_5-445705-4\_W.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-445705-4\_W.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_5-445705-4\_W.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Agency Approvals

Agency Approval Document

English