



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Disconnect**

Modular Terminal Block Product Type: **Screw Clamp Terminal Block**

Primary Product Color: **Gray**

Product Spacing: **8 mm [.315 in]**

Number of Positions: **2**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Number of Levels	1
Gauge Type	A5-B5
Number of Circuits	1
Block Function	Disconnect
Number of Positions	2

Electrical Characteristics

Power Loss	2.6 W
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	300 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Current Rating (IEC)	50 A
Current Rating (UL)	53 A
Current Rating (CSA)	53 A



Dielectric Withstanding Voltage (Max)	2000 V
Voltage Rating (IEC)	630 V
Voltage Rating (CSA)	300 V
Short-Time Withstanding Current Rating @ 1s	1200 A

Body Features

Product Weight	27 g
Primary Product Color	Gray

Mechanical Attachment

DIN Rail Mounting Type	TH35-15, TH35-7.5
Terminal Block Disconnect Type	Sliding Link
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide
------------------	-----------

Dimensions

Product Depth	52 mm
Tool Size	3.5 mm[.138 in]
Wire Stripping Length	13 mm
Main Circuit Capacity - 2 Rigid Stranded Conductors per Screw Clamp	20 – 12 AWG
Main Circuit Capacity - Twin Ferrule per Screw Clamp	20 – 12 AWG
Main Circuit Capacity - 2 Flexible Conductors per Screw Clamp	20 – 12 AWG
Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	24 – 6 AWG
Main Circuit Capacity - 1 Non-Insulated Ferrule per Screw Clamp	.5 – 10 mm²
Main Circuit Capacity - 1 Insulated Ferrule per Screw Clamp	.5 – 6 mm²
Main Circuit Capacity - 1 Flexible Conductor per Screw Clamp	24 – 6 AWG
Product Length	52 mm
Product Height	80.7 mm
Product Spacing	8 mm[.315 in]

Usage Conditions

Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Industry Standards



IP Rating	IP10
UL Flammability Rating	UL 94V-0

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) SVHC > Threshold: Pb (3.5% in 3441353) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

1SNK508312R0000

Screw Clamp Terminal Block, Disconnect, Gray, 8 mm [.315 in] Spacing, 2 Position, DIN Rail, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



TE Part # 1SNA400843R0000
PC8-R6



TE Part # 1SNA400842R0000
PC8-R5



TE Part # 1SNK900102R0000
BAZH1



TE Part # 1SNA400849R0000
PC8-R7




TE Part # 1SNA400711R0600
PC8-R1



TE Part # 1SNK169999R0000
MC812PA




TE Part # 1SNK160011R0000
MC812PA 1->10 (x10) Horizontal



TE Part # 1SNK900624R0000
KCO



TE Part # 1SNA400712R0700
PC8-R2

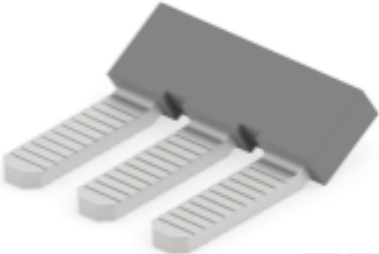

TE Part # 1SNA116539R1000
PC8-3



TE Part # 1SNK900611R0000
UMH



TE Part # 1SNK900002R0000
BAZ1



TE Part # 1SNA400713R0000
PC8-R3



TE Part # 1SNK900107R0000
CS-R3



TE Part # 1SNK900604R0000
CO



TE Part # 1SNA116540R2500
PC8-4




TE Part # 1SNA400724R0300
PC8-R4



TE Part # 1SNA163313R2400
PC8-10




TE Part # 1SNA173888R2000
BP8.A4



TE Part # 1SNK508910R0000
ES10-ST


Also in the Series | **ENTRELEC SNK**

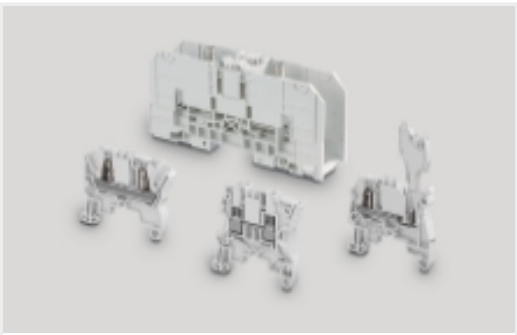

Modular Terminal Blocks(319)



Terminal Block & Strip Conducting Accessories(67)

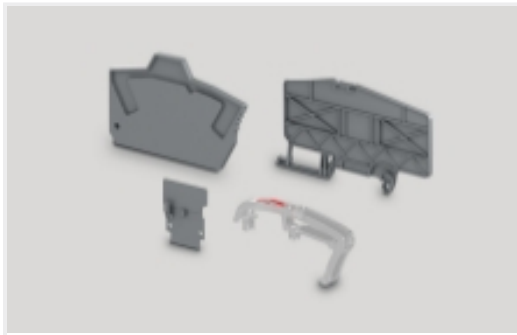

Terminal Block & Strip Insulating Accessories(31)

Customers Also Bought



TE Part #1SNK900630R0000
MCLH



TE Part #1SNK505010R0000
ZS4



TE Part #1SNK516150R0000
ZS35-PE




TE Part #1SNK900605R0000
LH.



TE Part #1SNK516020R0000
ZS35-BL



TE Part #1SNK505210R0000
ZS4-D2

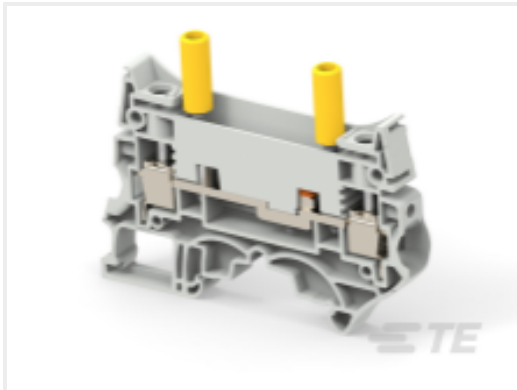

TE Part #1SNK508311R0000
ZS10-ST-T4



TE Part #1SNK516010R0000
ZS35



TE Part #1SNK905303R0000
JB5-3



TE Part #1SNK905302R0000
JB5-2

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK508312R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK508312R0000_A.3d_igs.zip

1SNK508312R0000

Screw Clamp Terminal Block, Disconnect, Gray, 8 mm [.315 in] Spacing, 2 Position, DIN Rail, -55 – 110 °C [-67 – 230 °F], ENTRELEC SNK



English

Customer View Model

[ENG_CVM_CVM_1SNK508312R0000_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ZS10-ST-1](#)

English

[ENTRELEC Terminal Block - Master Catalog](#)

[ENTRELEC Terminal Block - Master Catalog](#)

English

[SNK SERIES TERMINAL BLOCKS](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)