
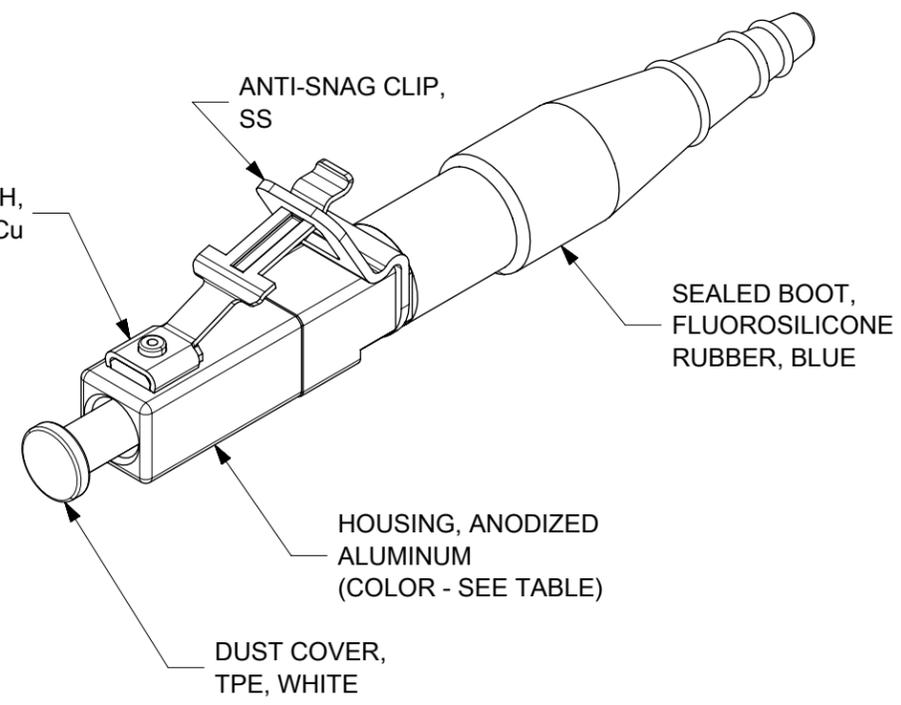
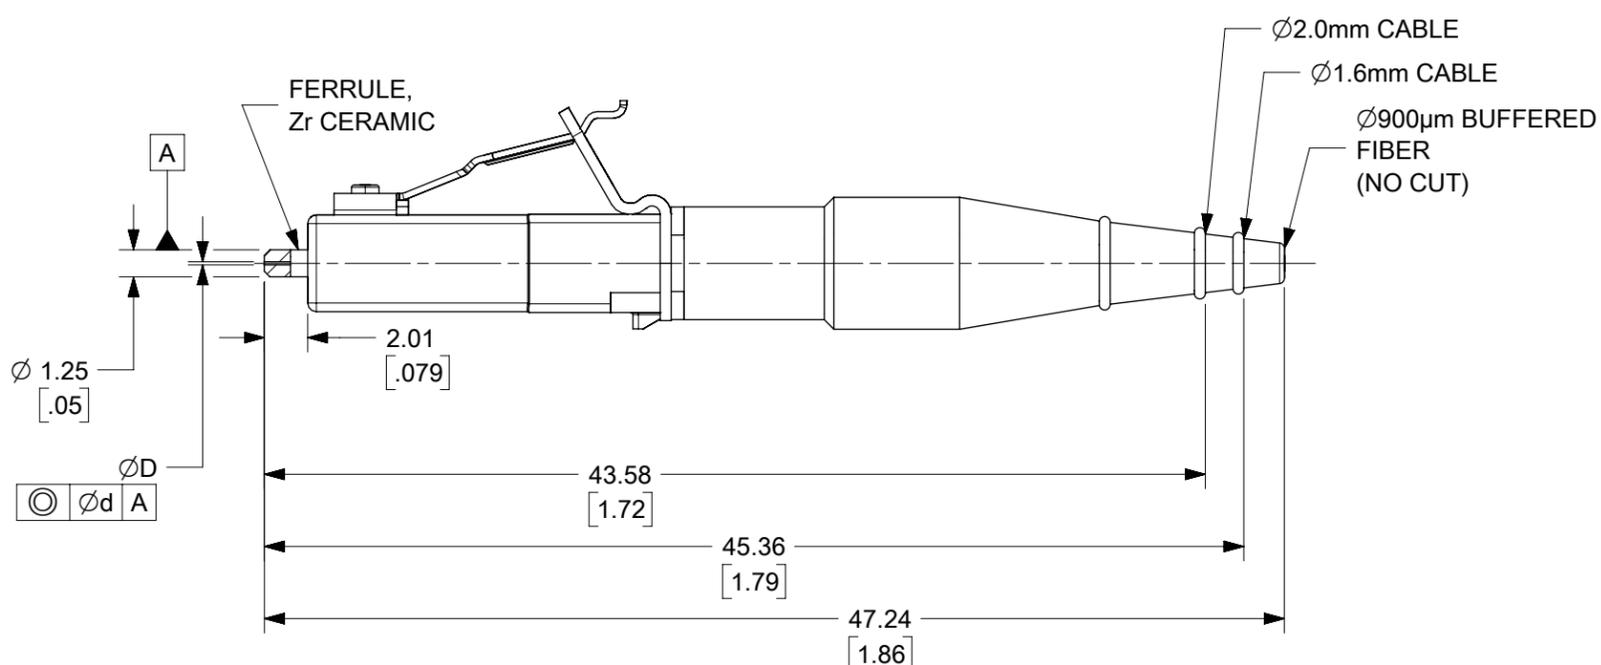


CONNECTOR P/N	CONNECTOR TYPE	HOUSING COLOR	ØD (µm)	Ød (µm)
1063721301	Single Mode	Blue	126.0 +1.0/-0	1.0
1063721500	Multimode	Gold	127.0 +3.0/-0	3.0

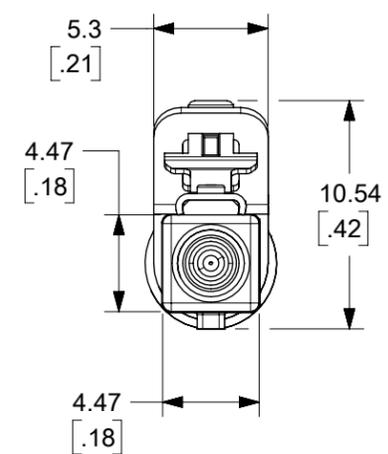

- NOTES:
1. INTERFACE DIMENSIONS COMPLY TO IEC 61754-20 TYPE LC CONNECTOR FAMILY.
 2. BOOT TO BE CUT AT LINES AS SHOWN DEPENDING ON THE CABLE SIZE.
 3. FOR TERMINATION PROCEDURE USE STANDARD LC TERMINATION PROCEDURE (RECOMMENDED CRIMP TOOL P/N 867445000)
 4. CONNECTOR TESTED TO PASS FOLLOWING STANDARDS:
 - TELCORDIA GR-326-CORE (REFER TO TEST REPORT TR9033)
 - IPC67 (REFER TO TEST REPORT ER-00290)
 5. CONNECTOR TO BE USED WITH THE FOLLOWING SEALED ADAPTERS: P/N 1061270300, 1061270320, 1061270150, and 1061270160.
- CONNECTOR IS SOLD AS A KIT. CUSTOMER IS RESPONSIBLE TO PERFORM THEIR OWN TEST TO VERIFY THEIR TERMINATION PROCESS AS A FINISHED PRODUCT.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	DIMENSION UNITS	SCALE	CURRENT REV DESC:
	MM/INCH	3:1	
	GENERAL TOLERANCES (UNLESS SPECIFIED)		
	ANGULAR TOL ± 1.0°		
DIVISIONAL SYMBOLS	4 PLACES	±	EC NO: 655686 DRWN: IGUMIN 2021/02/15 CHK'D: GGENCHANOK 2021/02/18 APPR: GGENCHANOK 2021/02/18 INITIAL REVISION: DRWN: SERNST 2010/05/10 APPR: WCHEN 2010/06/07
	3 PLACES	±	
	2 PLACES	±	
	1 PLACE	±	
	0 PLACES	±	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING
			SERIES
			MATERIAL NUMBER
			CUSTOMER
			SHEET NUMBER

molex

LC2+ METAL SEALED CONNECTOR, SIMPLEX

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER: SD-106372-1300 | DOC TYPE: PSD | DOC PART: 001 | REVISION: B1