



PAL86518H-FNF/ PAR86518H-FNF

Circular Polarity Wide Band RFID Antenna

865-956 MHZ 8.5 DBIC CIRCULAR POLARITY PANEL

PAL86518H-FNF/PAR86518H-FNF antennas are circularly polarized panel antennas that provide reception and transmission of signals in the 865-956 MHz frequency band. Our industry renowned design methodology achieves maximum efficiency and performance across the entire frequency band.

Both VSWR and axial ratios are excellent and allow the user to achieve the maximum performance for an antenna of this type. The antenna is housed in a heavy duty radome enclosure that can be directly wall mounted. An optional articulating mount allows either wall or mast mounting.

The antenna is offered with a fixed N-type connector.

FEATURES

- Low profile
- Extremely low VSWR and axial ratio
- Wide band
- Weather and UV resistant radome
- Wide range of connector and cable options
- Left hand and right hand CP versions
- IP 67

APPLICATIONS


- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyer belt

SPECIFICATIONS

Antenna Part Number	PAL86518H/PAR86518H
Frequency Range	865 - 956 MHz
Gain	8.5 dBic
Maxium VSWR	1.5:1
3 dB Beamwidth - Azimuth	65°
Front to Back Ratio	20dB
Polarization	Circular Right-hand or circular Left-hand
Maxium Input Power	3 Watts
Input Impedence	50 Ohms
Axial Ratio	1dB

SPECIFICATIONS

Weight (Kg)	1.89 lbs (0.86)
Mechanical Size	10.2" x 10.2" x 1.32"
Antenna Connection	Fixed N
Radome	High Strength PC
Mount Style	Threaded Stud
Temperature Operational	-25°C to +70°C
Lighting Protection	DC Grounded
Environmental Rating	IP 67

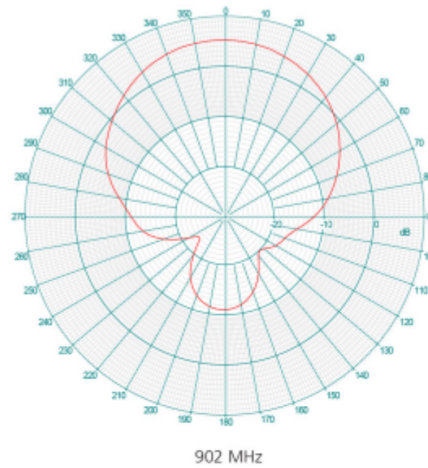

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2022 TE Connectivity. All Rights Reserved.

06/25 Original