

10

9

8

7

6

5

4

3

2

1

L = see sheet 2, PN KEY

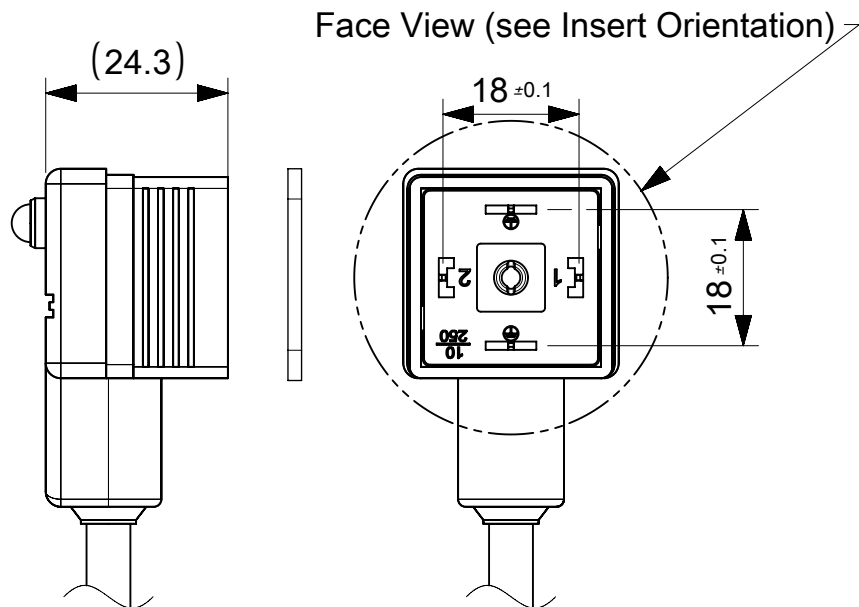
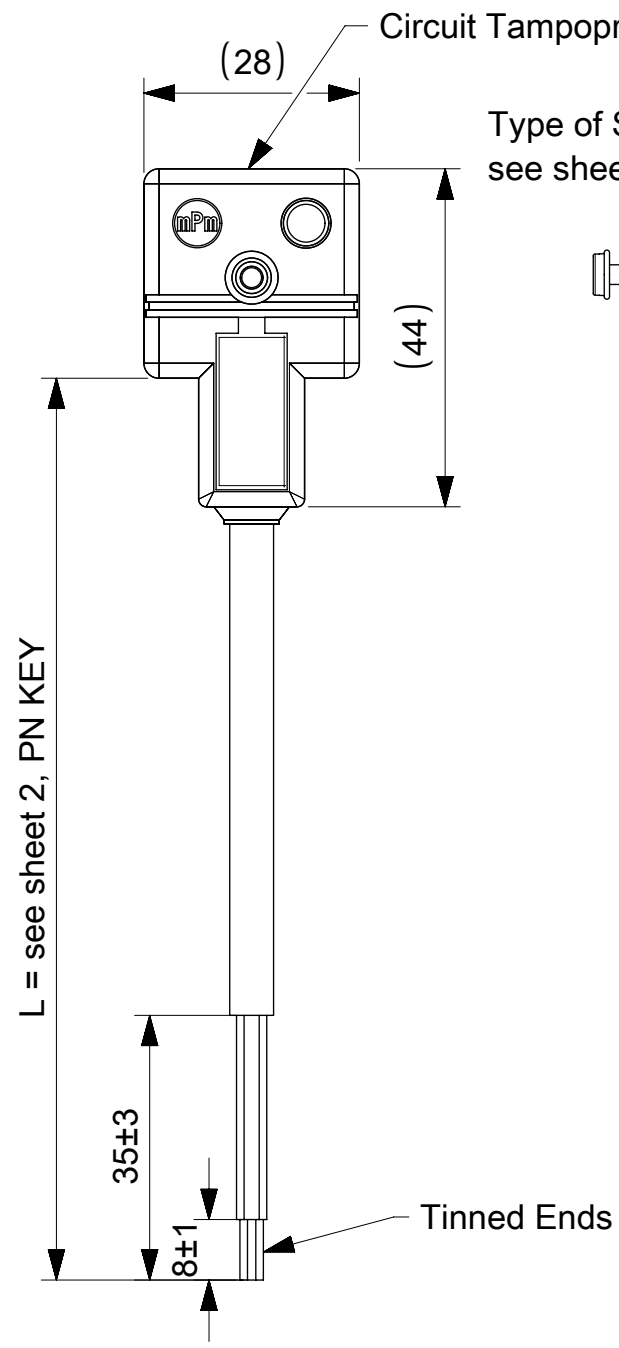


TABLE OF LENGTH TOLERANCES [mm]		
Over	Up to and Including	Tolerance
0	1000	±20
1000	3000	±30
3000	5000	±40
5000	10000	±50
10000	15000	±100
15000	20000	±150
20000		±L/100

Type of Screws and Gaskets

Profiled Gasket	Flat Gasket	Integrated Gasket	Screw M3x25
			Screw M3x27 + Washer
			NBR Washer

INSERT ORIENTATION	
Housing 2 Poles + 2 Earths	Housing 3 Poles + 1 Earth
Earth H6/H12 E452XXXXXX1XXXX	Earth H12 E452XXXXXX2XXXX PIN 3 Not Used
Earth H3/H9 E452XXXXXX4XXXX	Earth H3 E452XXXXXX3XXXX PIN 3 Not Used
Earth H6/H12	

PN KEY ENGINEERING PN

E

4

5

2

X

X

X

X

X

X

X

X

X

X

X

E - Packing without bag
W - Single Packing

Number of wires:
2 - 2 Wires + Earth

Cable type:
See Table

Head Colour:
G - Grey
N - Black
A - CSA-UL Black
B - CSA-UL Grey

Cable Length in[cm]
050 = 50cm
300 = 300cm
10K = 1000cm

Earth PIN location (see insert orientation table):
1 = Double Earth on H6 & H12
2 = Earth on H12
3 = Earth on H3
4 = Double Earth on H3 & H9
6 = Earth on H6
9 = Earth on H9

Wiring Configuration:
See sheet 3

Voltage and Led Colour


Red Led:	Green Led:	Yellow Led:
1 = 12V	A = 12V	G = 12V
2 = 24V	B = 24V	H = 24V
3 = 48V	C = 48V	K = 48V
4 = 115V	D = 115V	L = 115V
5 = 230V	E = 230V	M = 230V

Type of Gasket and Screw (see sheet 1):
1 = NBR Profile Gasket + Fixing Screw M3x25mm
2 = NBR Flat Gasket + Fixing Screw M3x25mm
3 = Silicone Profile Gasket + Fixing Screw M3x25mm
4 = Silicone Flat Gasket + Fixing Screw M3x25mm
P = NBR Integrated Gasket + Fixing Screw with Washer M3x27mm Assembled on Connector
R = NBR Integrated Gasket + Fixing Screw with Washer M3x27mm NOT Assembled on Connector
T = NBR Profile Gasket + Fixing Screw with Washer M3x27mm


CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE O.D.	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	SHIELD
A2	3	AWG 20	5.6mm±0.2	PVC BLACK	UL 2661	CSA C22.2	-30°C to +105°C, 10xO.D.	-5°C to +105°C, 15xO.D.	-
A3	3	AWG 18	6.5mm±0.25	PVC BLACK	UL 2				

WIRING DIAGRAMS


ELECTRICAL DIAGRAM 00

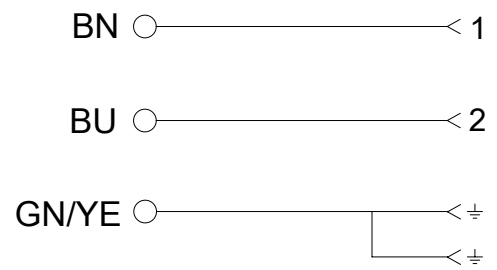


ELECTRICAL DIAGRAM A1

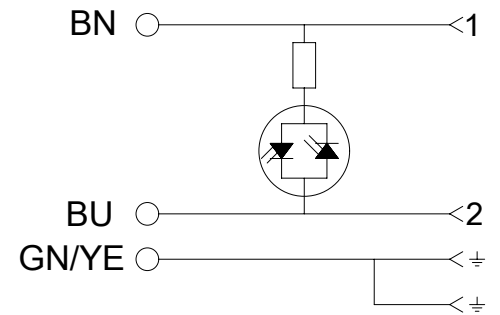


ELECTRICAL DIAGRAM C3

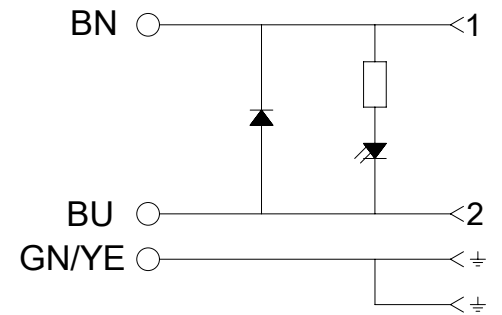


ELECTRICAL DIAGRAM C4

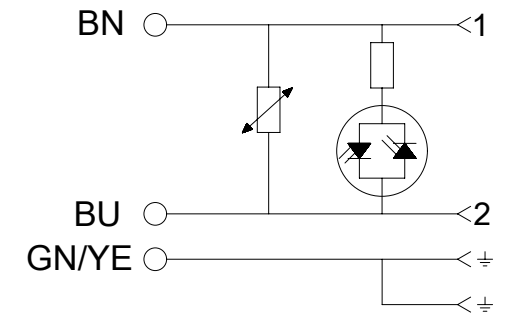


ELECTRICAL DIAGRAM C7

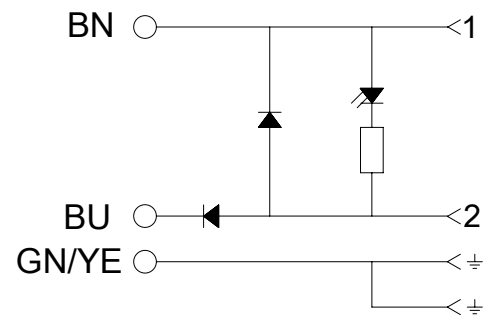


ELECTRICAL DIAGRAM D0

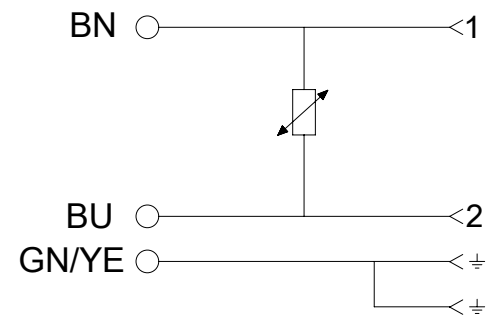


ELECTRICAL DIAGRAM E0

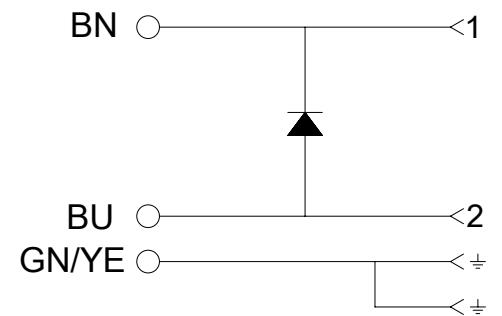


ELECTRICAL DIAGRAM R0

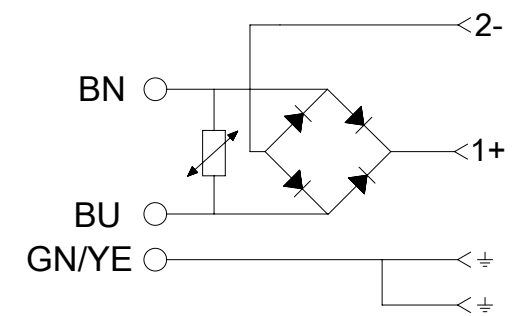


ELECTRICAL DIAGRAM R2

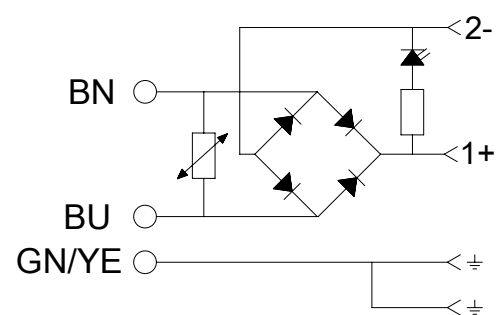


ELECTRICAL DIAGRAM S0

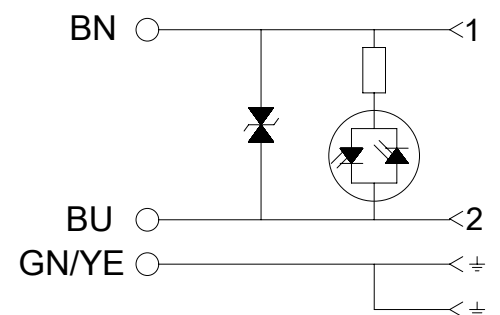

ELECTRICAL DIAGRAM S1

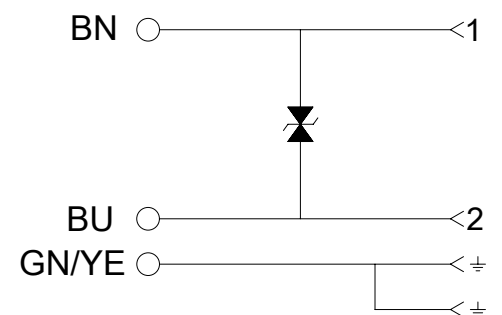

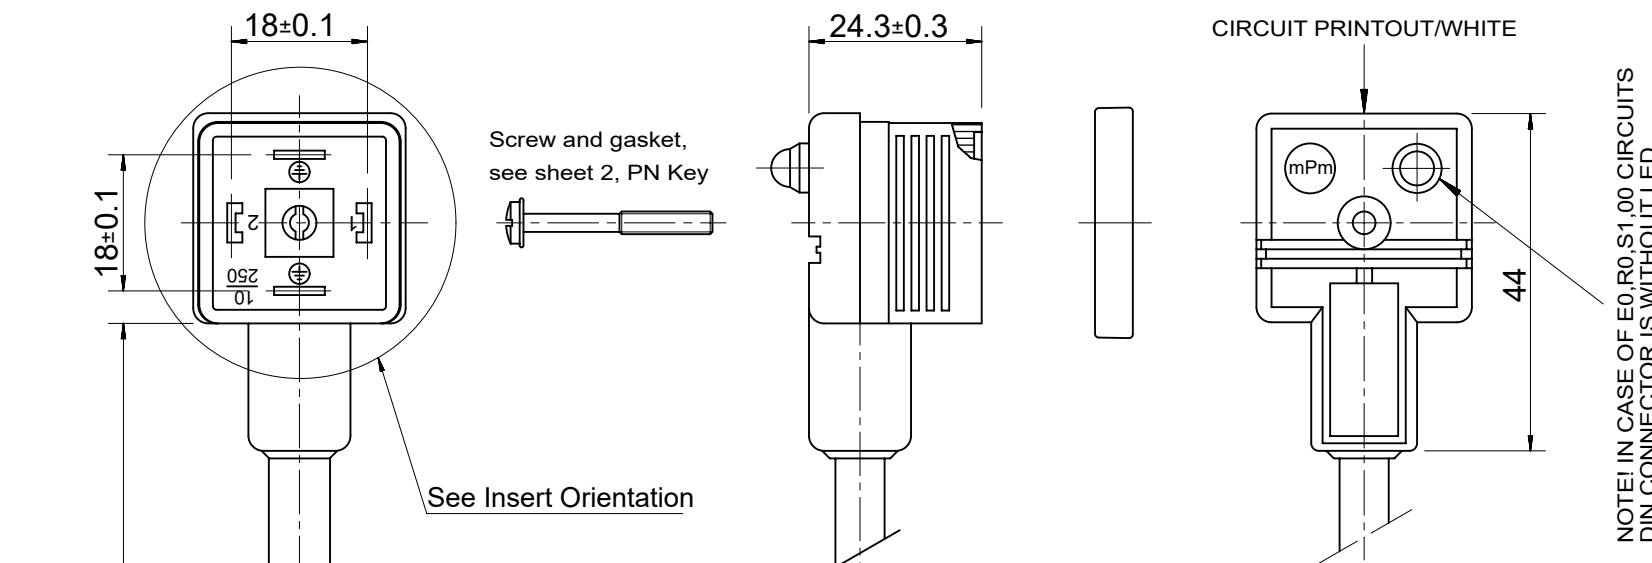

DOUBLE EARTH ON 6H & 12H E452XXXXXX1XXXX	EARTH PIN ON 12H E452XXXXXX2XXXX	EARTH PIN ON 6H E452XXXXXX6XXXX
DOUBLE EARTH ON 3H & 9H E452XXXXXX4XXXX	EARTH PIN ON 3H E452XXXXXX3XXXX	EARTH PIN ON 9H E452XXXXXX9XXXX

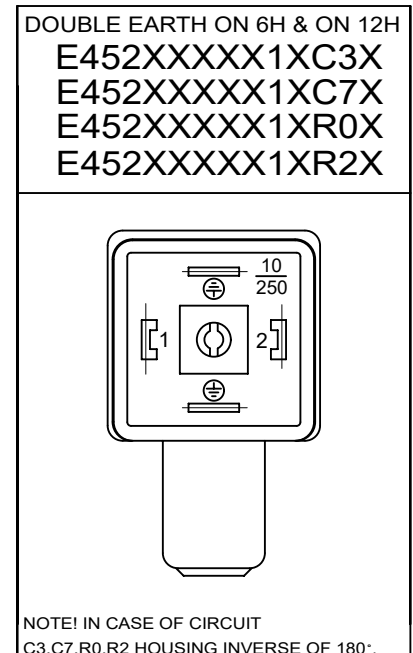


Table of length tolerances [mm]		
Over	Up to and including	Tolerance (+)
0	1000	±20
1000	3000	±30
3000	5000	±40
5000	10000	±50
10000	15000	±100
15000	20000	±150
20000		±L/100

WIRING CONFIGURATION

ELECTRICAL DIAGRAM **R0**

ELECTRICAL DIAGRAM **C4**

ELECTRICAL DIAGRAM **S0**

ELECTRICAL DIAGRAM **S3**

ELECTRICAL DIAGRAM **A1**

ELECTRICAL DIAGRAM **C3**

<

10	9	8	7	6	5	4	3	2	1																																																																																																																	
TABLE 2 - CABLES					TABLE 2 - CABLES																																																																																																																					
F	E	D	C	B	A	<table><tr><th>Molex PN Raw cable</th><th>Cable type</th><th>Cable code</th><th>Wires no.</th><th>Cross Section</th><th>Jacket material</th><th>Jacket color</th><th>Diameter Ø [mm]</th><th>Wire colors</th></tr><tr><td>1210180080</td><td>I</td><td>0</td><td>3</td><td>1 mm²</td><td>PVC CEI 2022 II O.R.</td><td>Grey</td><td>6.4±0.2</td><td>BN, BU, GN/YE</td></tr><tr><td>1210180467</td><td>A</td><td>2</td><td>2</td><td>20 AWG</td><td>PVC CSA/UL 2661</td><td>Black</td><td>5.4±0.2</td><td>BN, BU</td></tr><tr><td>1210180128</td><td>A</td><td>2</td><td>3</td><td>20 AWG</td><td>PVC CSA/UL 2661</td><td>Black</td><td>5.6±0.2</td><td>BN, BU, GN/YE</td></tr><tr><td>1210180394</td><td>A</td><td>2</td><td>4</td><td>20 AWG</td><td>PVC CSA/UL 2661</td><td>Black</td><td>6.2±0.25</td><td>BN, BU, BK, GN/YE</td></tr><tr><td>1210180297</td><td>B</td><td>2</td><td>2</td><td>20 AWG</td><td>PUR CSA/UL 20668</td><td>Black</td><td>5.6±0.2</td><td>BN, BU</td></tr><tr><td>1210180126</td><td>B</td><td>2</td><td>3</td><td>20 AWG</td><td>PUR CSA/UL 20668</td><td>Black</td><td>5.6±0.2</td><td>BN, BU, GN/YE</td></tr><tr><td>1210180387</td><td>B</td><td>2</td><td>4</td><td>20 AWG</td><td>PUR CSA/UL 20668</td><td>Black</td><td>6.3±0.2</td><td>BN, BU, BK, GN/YE</td></tr><tr><td>1210180122</td><td>D</td><td>2</td><td>3</td><td>0.5 mm²</td><td>PVC CEI 20-20</td><td>Grey</td><td>5.5±0.2</td><td>BN, BU, GN/YE</td></tr><tr><td>1210180047</td><td>I</td><td>2</td><td>2</td><td>0.5 mm²</td><td>PVC CEI 2022 II O.R.</td><td>Grey</td><td>5.5+0.3/-0</td><td>BN, BU</td></tr><tr><td>1210180284</td><td>I</td><td>2</td><td>3</td><td>0.5 mm²</td><td>PVC CEI 2022 II O.R.</td><td>Grey</td><td>5.5+0.3/-0</td><td>BN, BU, GN/YE</td></tr><tr><td>1210180146</td><td>I</td><td>2</td><td>4</td><td>0.5 mm²</td><td>PVC CEI 2022 II O.R.</td><td>Grey</td><td>6.5±0.2</td><td>BN, BU, BK, GN/YE</td></tr><tr><td>1210180177</td><td>I</td><td>2</td><td>5</td><td>0.5 mm²</td><td>PVC CEI 2022 II O.R.</td><td>Grey</td><td>7.0 +</td></tr></table>	Molex PN Raw cable	Cable type	Cable code	Wires no.	Cross Section	Jacket material	Jacket color	Diameter Ø [mm]	Wire colors	1210180080	I	0	3	1 mm²	PVC CEI 2022 II O.R.	Grey	6.4±0.2	BN, BU, GN/YE	1210180467	A	2	2	20 AWG	PVC CSA/UL 2661	Black	5.4±0.2	BN, BU	1210180128	A	2	3	20 AWG	PVC CSA/UL 2661	Black	5.6±0.2	BN, BU, GN/YE	1210180394	A	2	4	20 AWG	PVC CSA/UL 2661	Black	6.2±0.25	BN, BU, BK, GN/YE	1210180297	B	2	2	20 AWG	PUR CSA/UL 20668	Black	5.6±0.2	BN, BU	1210180126	B	2	3	20 AWG	PUR CSA/UL 20668	Black	5.6±0.2	BN, BU, GN/YE	1210180387	B	2	4	20 AWG	PUR CSA/UL 20668	Black	6.3±0.2	BN, BU, BK, GN/YE	1210180122	D	2	3	0.5 mm²	PVC CEI 20-20	Grey	5.5±0.2	BN, BU, GN/YE	1210180047	I	2	2	0.5 mm²	PVC CEI 2022 II O.R.	Grey	5.5+0.3/-0	BN, BU	1210180284	I	2	3	0.5 mm²	PVC CEI 2022 II O.R.	Grey	5.5+0.3/-0	BN, BU, GN/YE	1210180146	I	2	4	0.5 mm²	PVC CEI 2022 II O.R.	Grey	6.5±0.2	BN, BU, BK, GN/YE	1210180177	I	2	5	0.5 mm²	PVC CEI 2022 II O.R.	Grey	7.0 +
Molex PN Raw cable	Cable type	Cable code	Wires no.	Cross Section	Jacket material	Jacket color	Diameter Ø [mm]	Wire colors																																																																																																																		
1210180080	I	0	3	1 mm²	PVC CEI 2022 II O.R.	Grey	6.4±0.2	BN, BU, GN/YE																																																																																																																		
1210180467	A	2	2	20 AWG	PVC CSA/UL 2661	Black	5.4±0.2	BN, BU																																																																																																																		
1210180128	A	2	3	20 AWG	PVC CSA/UL 2661	Black	5.6±0.2	BN, BU, GN/YE																																																																																																																		
1210180394	A	2	4	20 AWG	PVC CSA/UL 2661	Black	6.2±0.25	BN, BU, BK, GN/YE																																																																																																																		
1210180297	B	2	2	20 AWG	PUR CSA/UL 20668	Black	5.6±0.2	BN, BU																																																																																																																		
1210180126	B	2	3	20 AWG	PUR CSA/UL 20668	Black	5.6±0.2	BN, BU, GN/YE																																																																																																																		
1210180387	B	2	4	20 AWG	PUR CSA/UL 20668	Black	6.3±0.2	BN, BU, BK, GN/YE																																																																																																																		
1210180122	D	2	3	0.5 mm²	PVC CEI 20-20	Grey	5.5±0.2	BN, BU, GN/YE																																																																																																																		
1210180047	I	2	2	0.5 mm²	PVC CEI 2022 II O.R.	Grey	5.5+0.3/-0	BN, BU																																																																																																																		
1210180284	I	2	3	0.5 mm²	PVC CEI 2022 II O.R.	Grey	5.5+0.3/-0	BN, BU, GN/YE																																																																																																																		
1210180146	I	2	4	0.5 mm²	PVC CEI 2022 II O.R.	Grey	6.5±0.2	BN, BU, BK, GN/YE																																																																																																																		
1210180177	I	2	5	0.5 mm²	PVC CEI 2022 II O.R.	Grey	7.0 +																																																																																																																			

	10	9	8	7	6	5	4	3	2	1		
F	TABLE 3 - PART LIST										F	
	Pos.	Molex PN:	Engineering No.:	Pos.	Molex PN:	Engineering No.:	Pos.	Molex PN:	Engineering No.:	Pos.	Molex PN:	Engineering No.:
	1	1210400514	E452N3N10012000	41	1210500389	E452I2N30011C3H	81	1210500514	E452I4N55011C72	121	1210500650	E452N3N30011C42
	2	1210400515	E452N3N30012000	42	1210500390	E452I2N30011C42	82	1210500515	E452I4N60011C42	122	1210500651	E452N3N30011C44
	3	1210400516	E452N3N50012000	43	1210500392	E452I2N30011C4H	83	1210500520	E452I4N70011R2H	123	1210500652	E452N3N30011C45
	4	1210400517	E452P3N10012000	44	1210500393	E452I2N30011C4L	84	1210500522	E452I4N80011C4H	124	1210500657	E452N3N30011C4H
	5	1210400519	E452P3N30012000	45	1210500394	E452I2N30011C4M	85	1210500524	E452I8N50011C4H	125	1210500658	E452N3N30011C4L
E	6	1210400755	E452N3N2001P000	46	1210500398	E452I2N50011C42	86	1210500548	E452N3N10011A11	126	1210500659	E452N3N30011C4M
	7	1210400810	E452N3N15K12000	47	1210500399	E452I2N50011C4H	87	1210500549	E452N3N10011C			

TABLE

