



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **Time Delay Relay**
Contact Arrangement: **2 Form C DPDT-CO**
Current Type: **DC**
Contact Current Rating: **10 A**
Main Termination & Connection Type: **Screw Terminals**

Features

Product Type Features

Relay & Contactor Type	Time Delay Relay
------------------------	------------------

Configuration Features

Contact Arrangement	2 Form C DPDT-CO
---------------------	------------------

Electrical Characteristics

Input Voltage	125 VDC
Contact Current Rating	10 A

Termination Features

Main Termination & Connection Type	Screw Terminals
Coil Termination & Connection Type	Screw Terminals

Mechanical Attachment

Product Mounting Feature Type	Mounting Brackets
Product Mount Type	Chassis Mount

Dimensions

Product Width	82.55 mm[3.25 in]
Product Length	114.8 mm[4.52 in]
Product Height	78.4 mm[3.09 in]

Usage Conditions

--	--



Operating Temperature Range	-30 – 75 °C
Environmental Ambient Temperature (Max)	75 °C[167 °F]

Operation/Application

Repeatability (Max)	±10%
Type of Control	Knob
Mode of Operation	On-Delay
Delay Time	3 – 120 cycles
Current Type	DC

Other

Contact Current Class	>5 – ≤10 A
Height Class (Mechanical)	>70 mm[>2.756 in]
Length Class (Mechanical)	>70 mm[>2.756 in]
Width Class (Mechanical)	>33 mm[>1.299 in]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) SVHC > Threshold: Cd (.2% in Component Part) Acids from CrO3 and Oligomers (.2% in Component Part) Pb (3.7% in 74019790) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 7-1423159-3 7012SBLX=RLY,STD,ON,2P,250VDC	 TE Part # 4-1472981-6 7022GCM=RLY,STD,OFF,2P,240V50HZ,15S,M	 TE Part # 7-1755074-0 7012FE=RLY,STD,ON,2P,127V,200S	 TE Part # 3-1437470-7 924822RCI=74VDC 5-25 SEC
 TE Part # 3-1423166-6 7024OC=RLY,STD,OFF,4P,24V,15S	 TE Part # 4-1423161-7 7014X3CL=RLY,STD,4P,110V,20S,L	 TE Part # 5-1423157-6 7012AKT=RLY,STD,ON,2P,120VAC	 TE Part # 2-1423159-7 7012PE=RLY,STD,ON,2P,125VDC,20
 TE Part # 1-1437449-3 7012WB=RLY,STD,ON,2P,96VDC,5	 TE Part # 1423157-5 7012AC=RLY,STD,ON,2P,120VAC,15	 TE Part # 1423172-9 E7014ADL004=RLY,NUC,ON,4P,120V,100S,L	 TE Part # 1-1423159-3 7012OD=RLY,STD,ON,2P,24VDC,50
 TE Part # 1423162-7 7022AD=RLY,STD,OFF,2P,120VAC,5	 TE Part # 3-1437452-7 7022AFX="RLY,STD,OFF,2P,120VAC	 TE Part # 7-1437450-3 7014PALL=RLY,STD,ON,4P,125VDC	 TE Part # 8-1437450-7 7014PDL="RLY,STD,ON,4P,125VDC,





TE Part # 5-1472981-4
7022JF=RLY,STD,OFF,2P,208V,10M



TE Part # 3-1423162-2
7022CBM=7022CBM



TE Part # 3-1755150-9
7012BIT=RLY,STD,ON,2P,240VAC,60MIN,T OPT



TE Part # 1-1755150-5
7012AILL="RLY,STD,ON,2P,120V,60M,LL

Customers Also Bought



TE Part #1062-16-1222
SOC, SF, SIZE 16, 12-16, NI/SN



TE Part #HD36-18-8SN
PLG, 8P, AL, N, 12, S



TE Part #4-1393104-2
KRPA-11DG-110=KRPA




TE Part #1-1393118-2
KUP-14D15-110=KU



TE Part #1-1393239-3
RT114024



TE Part #1-1393304-1
V23134J1053D642-EV-CBOX

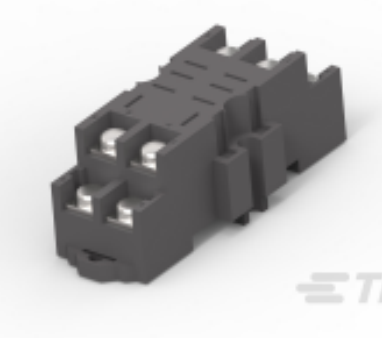

TE Part #2-1419106-7
27E895=SOCKET,K10,8,QC,POLY,DINRAIL



TE Part #5-1423159-4
7012SFX=RLY,STD,ON,2P,250VDC,DINRAIL



TE Part #1423161-8
7014PD=RLY,STD,ON,4P,125VDC,10



TE Part #HS34-L
MISCACC,HS,3/4HOLE

Documents

Product Drawings
7012PJ=RLY,STD,ON,2P,125VDC,1
English