



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	07JUN2023	CHU	TD
	A1	NOTES AND TABLE UPDATED	15APR2024	PS	TD

1. CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.08±0.08 CENTERS.




2. SLOT TERMINATES EITHER A SINGLE OR DOUBLE MAGNET WIRE OF THE SAME SIZE AND TYPE.
COPPER MAGNET WIRE RANGE: 0.45-0.64mm [25-22 AWG]
ALUMINUM MAGNET WIRE RANGE: 0.57-0.72mm [23-21 AWG]
ALUMINUM WIRE CAN ONLY BE USED IN COMBINATION WITH POST TIN PLATED TERMINAL PART NUMBERS.

3. POKE-IN ACCEPTS 2.92mm WIDTH X 0.50mm THICKNESS TAB.


4. CAVITY DESIGN REFER 1969944

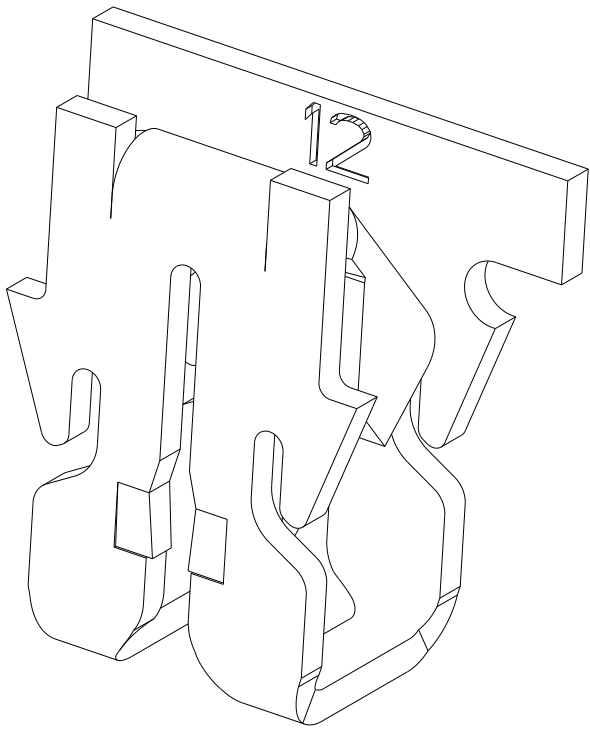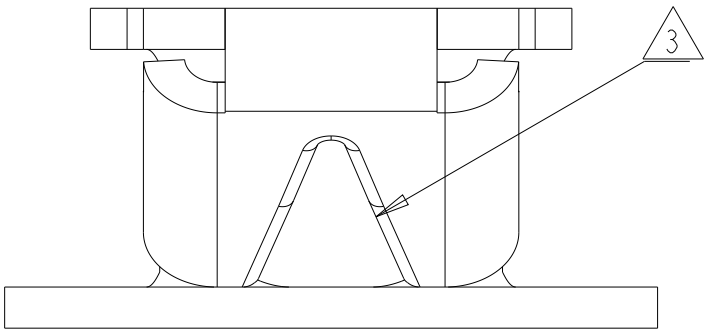

IDENTIFICATION NUMBER 12 FOR MAGNET WIRE RANGE

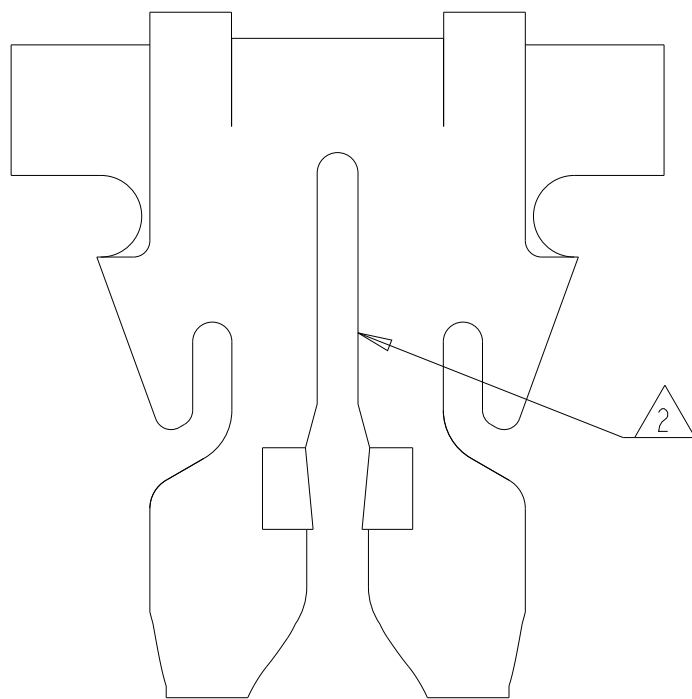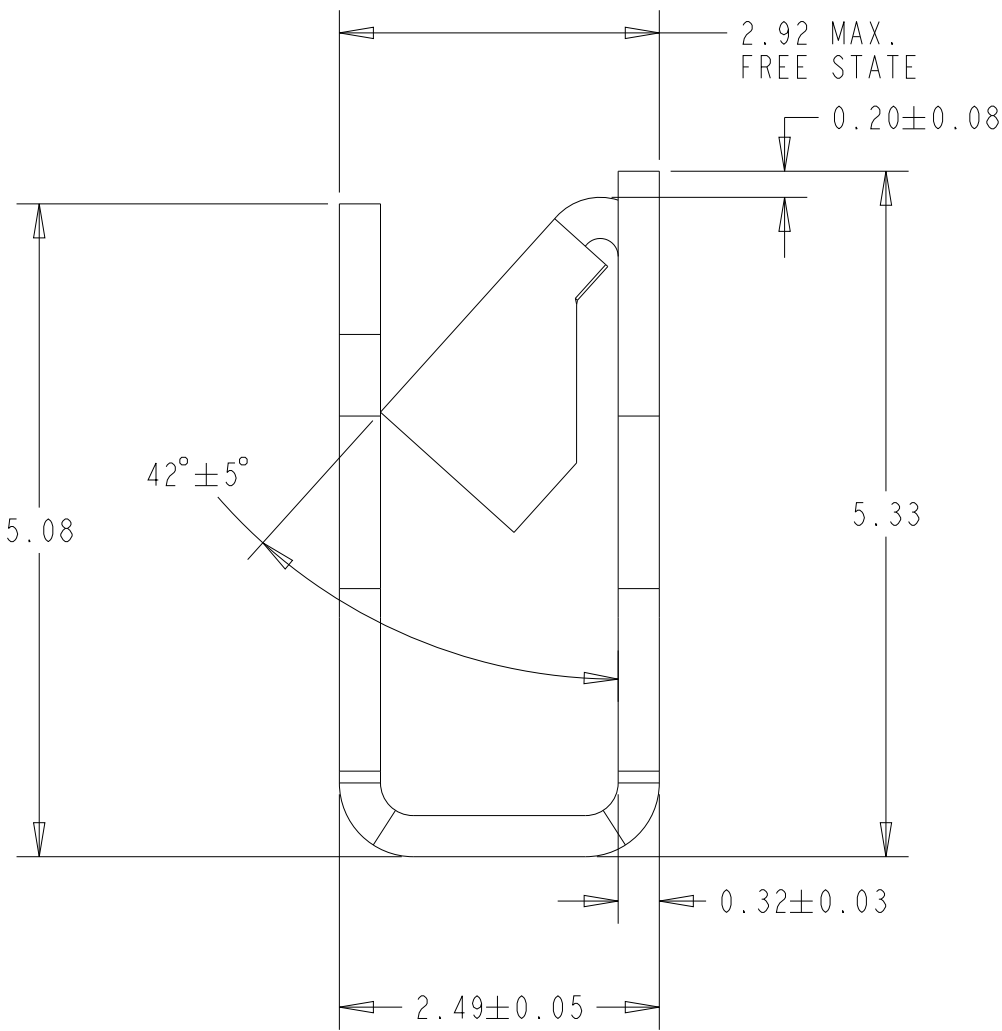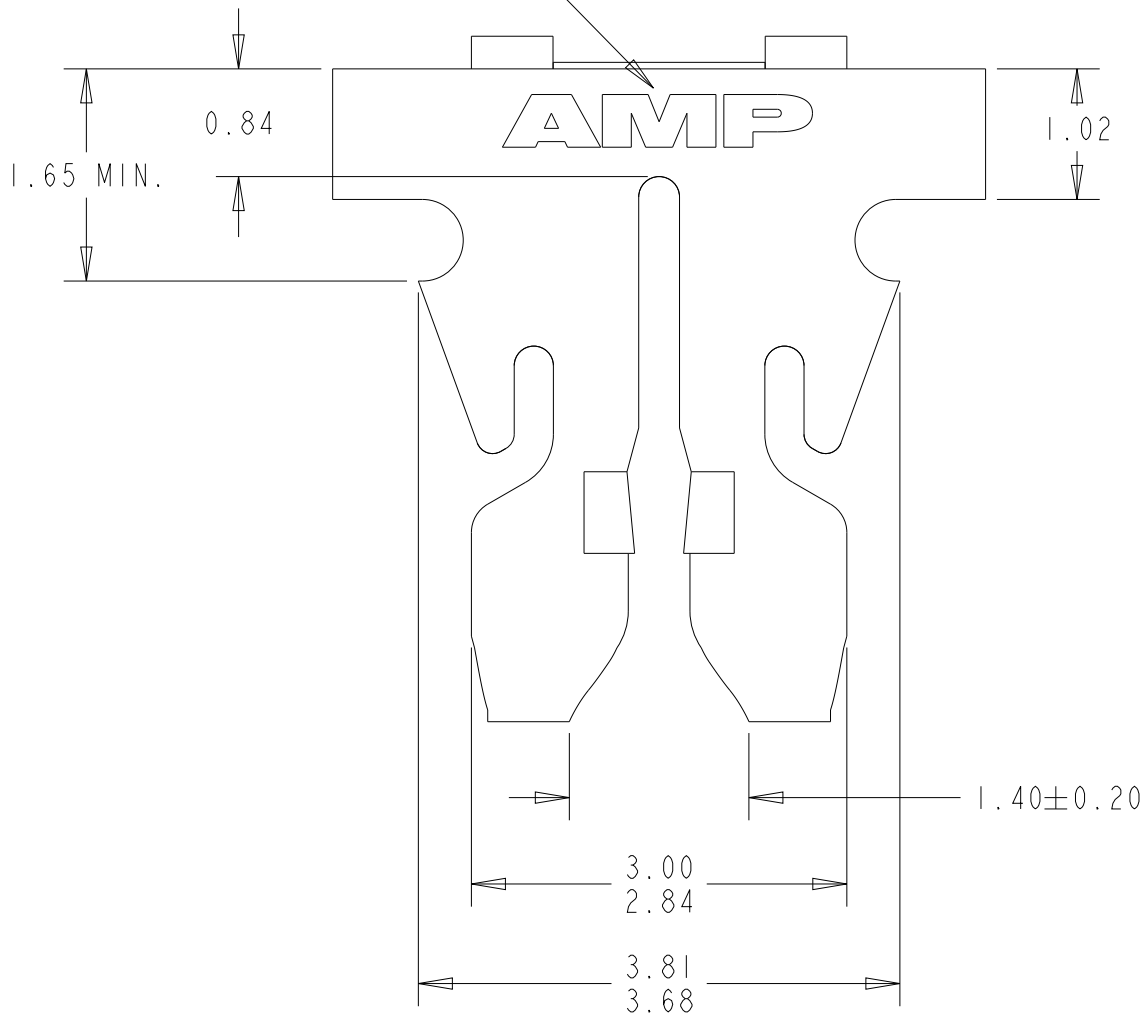

DIRECTION OF TOP OF REEL

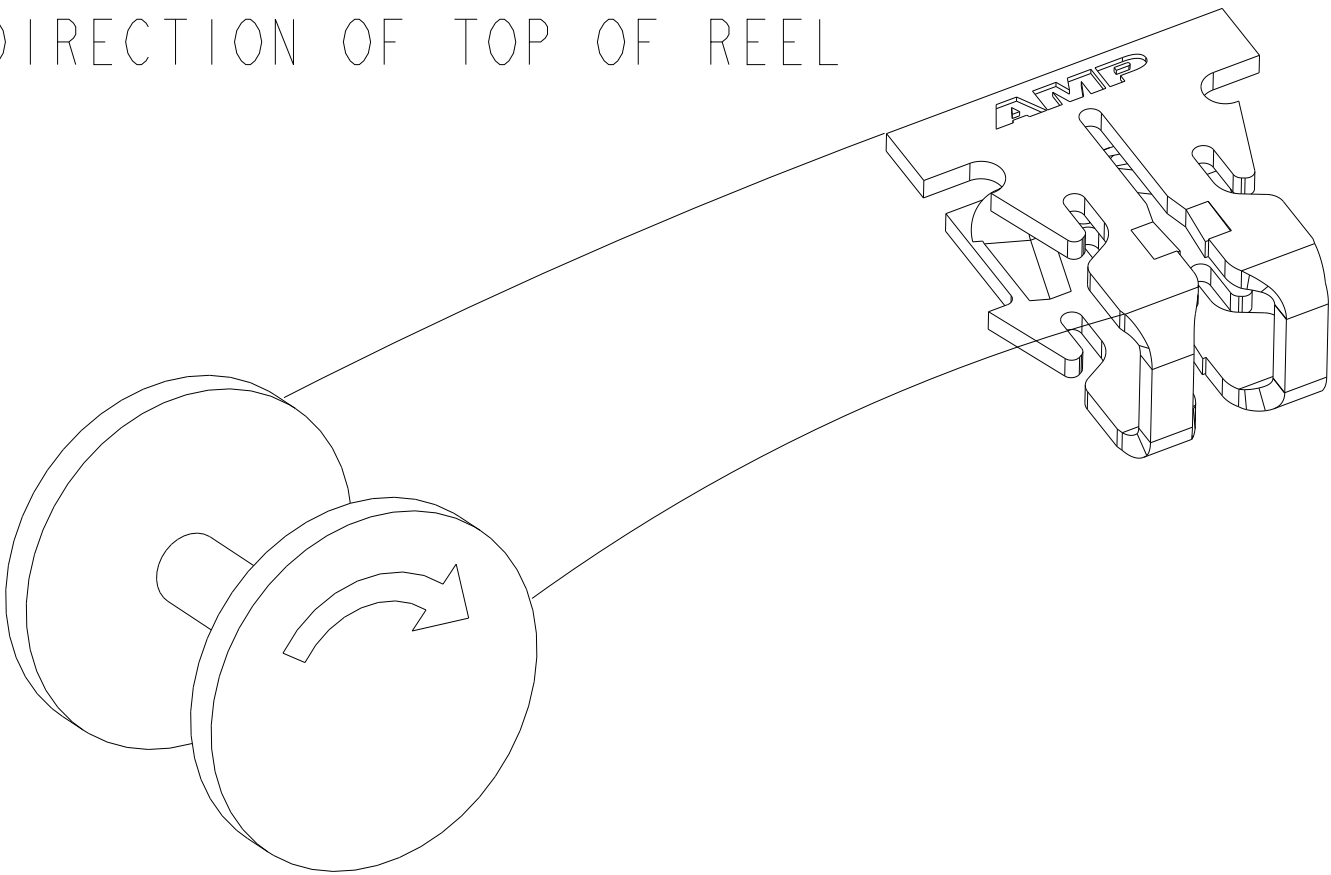

TIN PLATED	BRASS	2401612-1
FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 22OCT2021 JUSTIN HUANG	TE Connectivity			
		CHK 22OCT2021 JUSTIN HUANG				
DIMENSIONS:		APVD 22OCT2021 TIM DING	NAME			
mm		PRODUCT SPEC	TERMINAL, POKE-IN, 200 SERIES MAG-MATE			
		108-2012	-			
		APPLICATION SPEC	-			
		114-160157	-			
MATERIAL		WEIGHT	-			
SEE TABLE		CUSTOMER DRAWING	-			
		SCALE 17:1	SHEET 1 OF 1			
		REV A1				