


REVISIONS			
ZONE	LTR	DESCRIPTION	DATE
	N/C	RELEASED PER ECN T-18675	10/93
	A	REVISED PER ECN T-19034	3-22-94

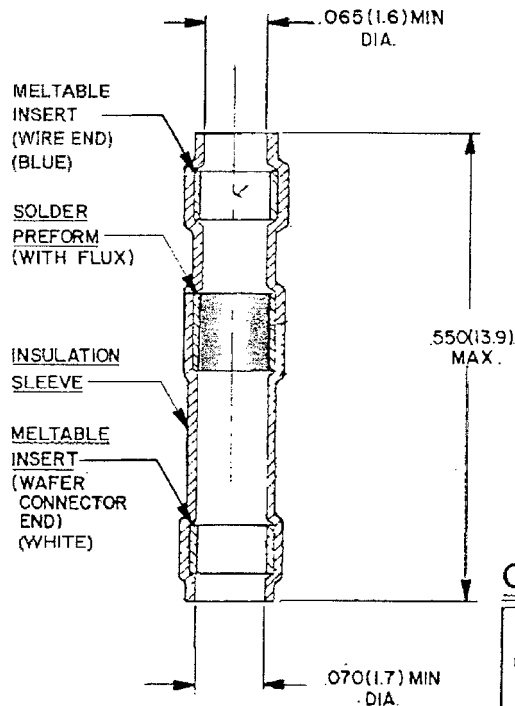

NOTES:

1. MATERIALS:

- 1-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- 1-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: SN96 SRAP PER QQ-S-571.
- 1-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAGE CONDUCTORS TO THE TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS () ARE METRIC AND TOLERANCES ARE:		DRAWN	D PIQUE	93SEP29	Raychem RAYCHEM CORPORATION 300 CONSTITUTION DR. MENLO PARK CA.	
XXX ± (M M)		CHECKED	R.W.	10-28-93	TITLE SOLDER SLEEVE WIRE TERMINATOR DOUBLE SEAL FOR TEMP RATING (150°C) (SN96) MTC100 SERIES	
XX ± (M M)		APPROVED	10-93			
Δ ±		APPROVED				
		APPROVED				
		PROJECT	0225.PCX			SIZE A
						CODE IDENT NO. 06090
						DWG. NO. CTA-0225
						WEIGHT
						SHEET 1 OF 1

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING