




Relays & Contactors > Electromechanical Relays > Force Guided Relay with 4 contacts

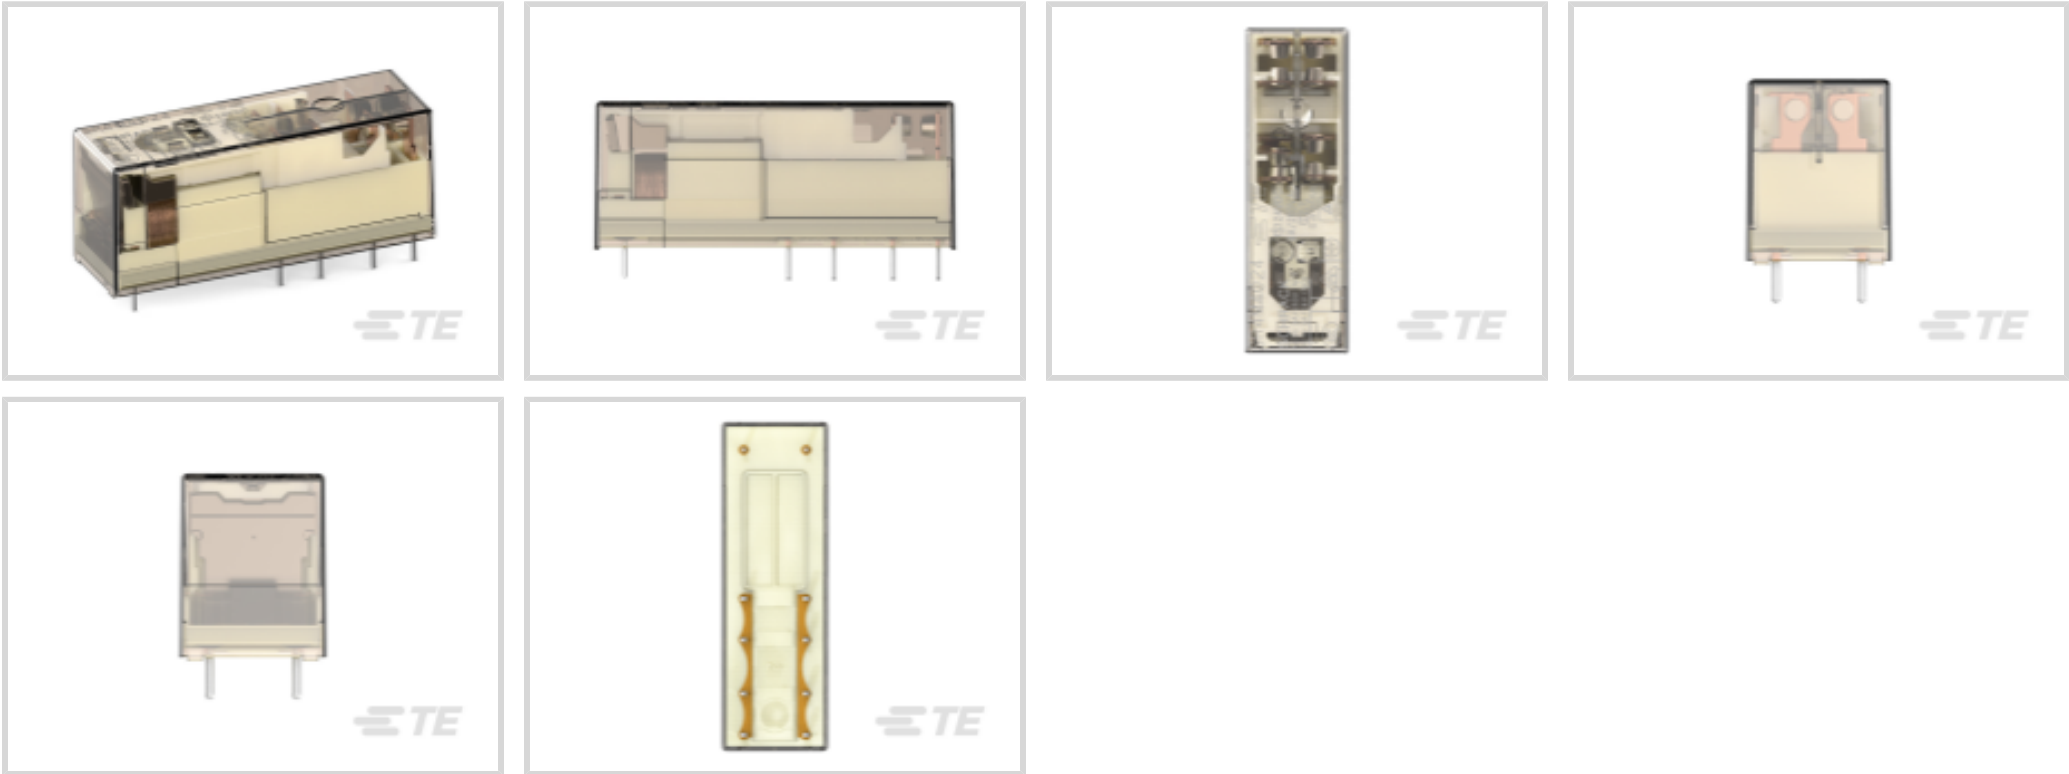

Relay & Contactor Type: **Force-Guided Relay**

Coil Magnetic System: **Monostable**

Contact Arrangement: **3A (NO) + 1B (NC)**

Current Type: **DC**

Contact Current Rating: **8 A**

[All Force Guided Relay with 4 contacts \(27\)](#)

Features

Product Type Features

Relay & Contactor Type	Force-Guided Relay
------------------------	--------------------

Configuration Features

Contact Number of Poles	4
Contact Arrangement	3A (NO) + 1B (NC)

Electrical Characteristics

Contact Limiting Short-Time Current	8 A
Contact Limiting Making Current	8 A
Contact Limiting Continuous Current	8 A
Contact Limiting Breaking Current	8 A
Insulation Initial Dielectric Between Open Contacts	1500 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	2500 Vrms
Coil Current	.033 A



Contact Switching Voltage (Max)	400 VAC
Contact Switching Load (Min)	10mA @ 5V
Coil Resistance	720 Ω
Contact Current Rating	8 A
Coil Voltage Rating	24 VDC
Contact Voltage Rating	250 VAC
Coil Power Rating DC	.8 W
Insulation Initial Dielectric Between Contacts & Coil	4000 Vrms

Body Features

Product Weight	30 g[1.058 oz]
Enclosure Type	Flux Resistant Automatic Solder Capable & Washable

Contact Features

Contact Material	AgSnO2
------------------	--------

Termination Features

Main Termination & Connection Type	Solder Pins
Coil Termination & Connection Type	Solder Pins

Mechanical Attachment

Product Mount Type	Board Mount
--------------------	-------------

Dimensions

Insulation Clearance Between Contact & Coil	10 mm[.394 in]
Insulation Creepage Between Contact & Coil	10 mm[.394 in]
Product Width	13.1 mm[.516 in]
Product Length	40.1 mm[1.57 in]
Product Height	16.6 mm[.653 in]

Usage Conditions

Operating Temperature Range	-25 – 70 °C[-13 – 158 °F]
Environmental Category of Protection	RTIII
Environmental Ambient Temperature (Max)	70 °C[158 °F]

Operation/Application

Coil Magnetic System	Monostable
Current Type	DC



Product Availability

Product Availability	Worldwide
----------------------	-----------

Packaging Features

Packaging Method	Box & Tube, Tube
------------------	------------------

Other

Coil Power Rating Class	>.6 – ≤1 W
Contact Current Class	>5 – ≤10 A
Height Class (Mechanical)	>16 – ≤22 mm[>.63 – ≤.866 in]
Length Class (Mechanical)	>33 – ≤45 mm[>1.299 – ≤1.772 in]
Width Class (Mechanical)	>11 – ≤14 mm[>.433 – ≤.551 in]

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


SR4M4024

Force-Guided Relay, DC, Monostable, 3A (NO) + 1B (NC), 8 A Contact Rating, 24 VDC Coil Voltage, 250 VAC Contact Voltage, .8 W Coil Power, SCHRACK SR4






TE Part # 5-2071571-8
SR4M4024



TE Part # 1546556-3
3P,STACKABLE,55 DEG,3.5MM

Also in the Series | SCHRACK SR4

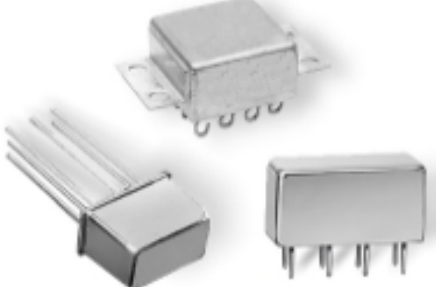

DC Relays(27)



PCB Relays(27)


Customers Also Bought




TE Part #EKB201N00320500000
915 EXTENSION




TE Part #2-84984-0
1mm FFC DIP V ASSY 20P NAT(TB)



TE Part #1-215307-4
2X14P HV100 REC CON. TE, 7.0MM

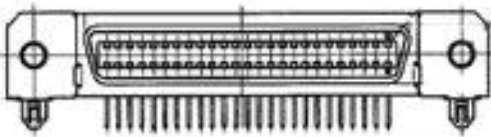

TE Part #316998-7
CHAMP.050 REC HDR ASS'Y FMS TY

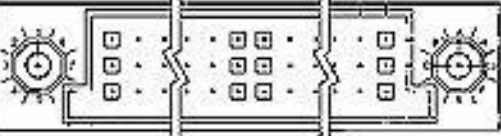

TE Part #533061-8
HDI PIN ASSY 3 ROW 165 POS



TE Part #6-1415054-1
SR4M4110




TE Part #2-2170808-4
QSFP28, 1X2, CAGE ASSY, SPRING, HS, LP



TE Part #2-2176050-9
RLP73K 1E R75 5% 5K RL



TE Part #5787745-5
USB A R/A STAK ASSY THRU HOLE

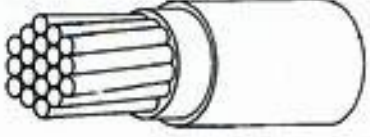

TE Part #282520-000
44A0311-18-0-US



Documents

CAD Files

Customer View Model

ENG_CVM_4-1415053-1_SEK1.3d_igs.zip

English

Customer View Model

ENG_CVM_4-1415053-1_SEK1.3d_stp.zip

English

Customer View Model

ENG_CVM_4-1415053-1_SEK1.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

FORCE GUIDED RELAY SR4

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

VDE Certificate

English