




Connectors > PCB Connectors > PCB Headers & Receptacles

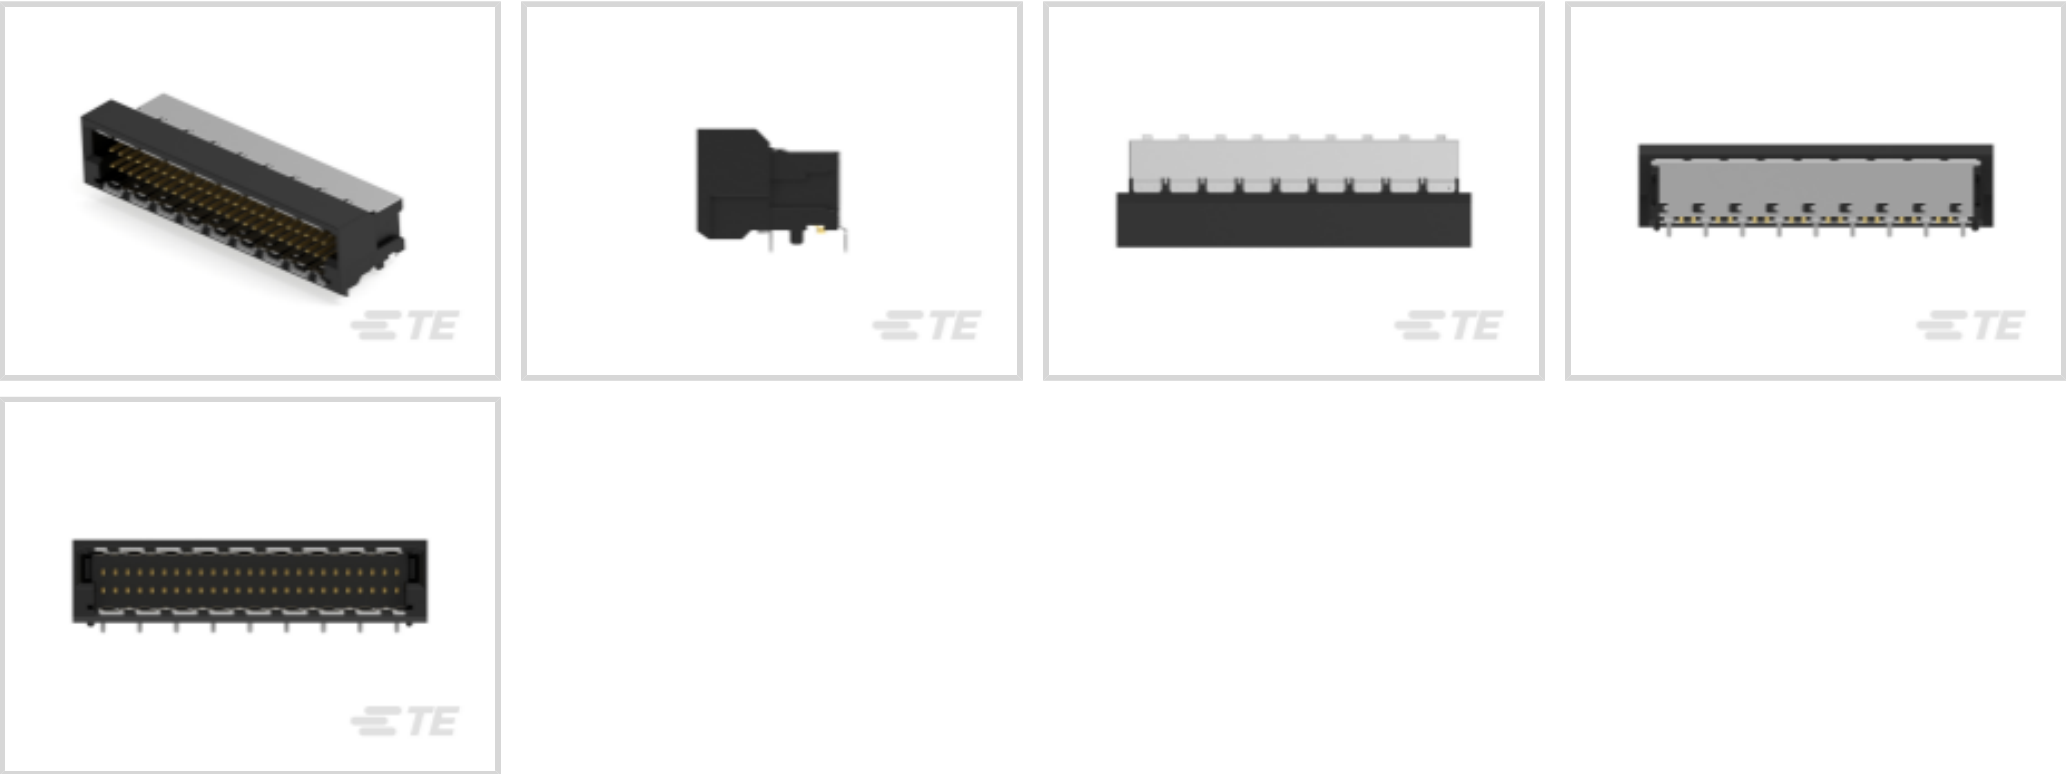

PCB Connector Type: **PCB Mount Header**

Connector System: **Board-to-Board**

Number of Positions: **50**

Number of Rows: **2**

Centerline (Pitch): **1 mm [.039 in]**

Features

Product Type Features

Connector Shape	Rectangular
PCB Connector Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Fully Shrouded
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Number of Columns	25
Number of Loaded Positions	50
Connector Contact Load Condition	Fully Loaded
Stackable	No
Number of Positions	50
Number of Rows	2
PCB Mount Orientation	Right Angle



Electrical Characteristics

Impedance	100 Ω
Insulation Resistance	10000 MΩ
Dielectric Withstanding Voltage (Max)	500 Vrms

Signal Characteristics

Data Rate	25 Gb/s
-----------	---------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Contact Shape & Form	Rectangular
PCB Contact Termination Area Plating Material Thickness	4 – 6 μm[157.48 – 236.22 μin]
Contact Layout	Matrix
Contact Mating Area Length	2.9 mm[.114 in]
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold (Au)
Contact Type	Pin
Contact Current Rating (Max)	1 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Termination Post & Tail Length	1.2 mm[.047 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mounting Alignment Feature Length	.7 mm[.027 in]
PCB Mount Alignment Type	Locating Posts
Mating Alignment Type	Blindmate
Connector Mounting Type	Board Mount
Mating Alignment	With
PCB Mount Alignment	With
PCB Mount Retention	Without

Housing Features

Mating Entry Location	Side
Centerline (Pitch)	1 mm[.039 in]



Housing Material	LCP
------------------	-----

Dimensions

Connector Width	8.8 mm[.346 in]
Connector Height	6.75 mm[.266 in]
Connector Length	28.95 mm[1.139 in]
Row-to-Row Spacing	1.5 mm[.059 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Shielded	Yes
Circuit Application	Power, Signal & High Speed Data

Industry Standards

Compatible With Agency/Standards Products	DIN, UL
Industry Standard	IEC
Compatible With Approved Standards Products	UL
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Reel Diameter	330 mm[12.99 in]
Packaging Quantity	400
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content




Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts

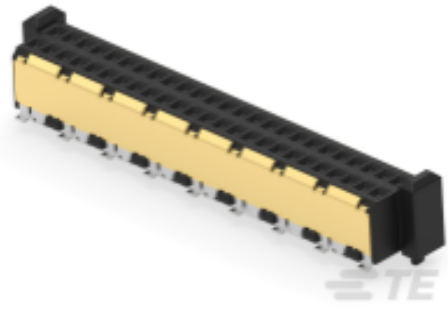

TE Part # 374725-E
MSPEED 50 F SMD F4 BE AB VV 137 094 **




TE Part # 284310-E
MSPEED 50 F SMD * 90BE AB VV 137 094 **

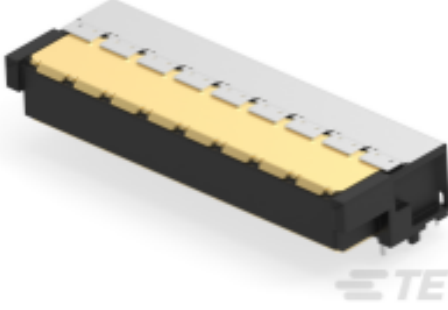


TE Part # 374720-E
MSPEED 50 F SMDTHR * 90BE AB VV 137 094

Also in the Series | ERNI MicroSpeed

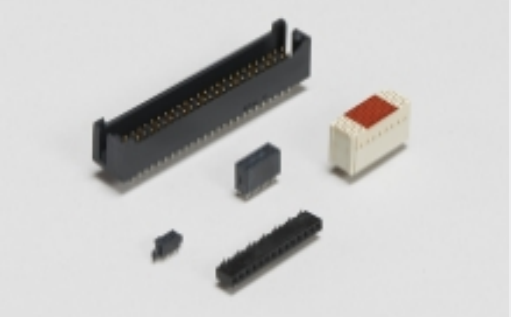


Board-to-Board Headers & Receptacles(60)

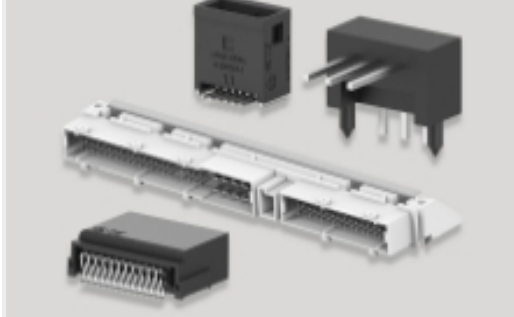

PCB Headers & Receptacles(67)



Rectangular Power Connectors(50)

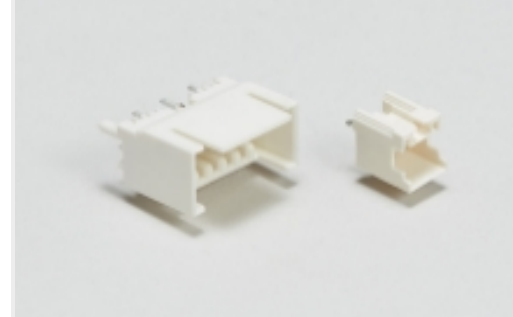


Wire-to-Board Headers & Receptacles (7)

Customers Also Bought




TE Part #244836-E
SMCQ 12 M AB VV 8-13 CL * H007 137 E005

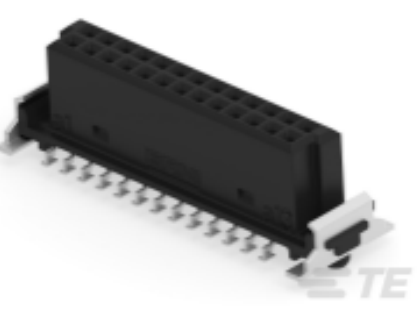

TE Part #154806-E
SMCB 26 F AB VV 7-13 CL * H007 137 E002



TE Part #MS580330BA01-00
MS5803-30BA01 DIGIT PRESSURE SENSOR

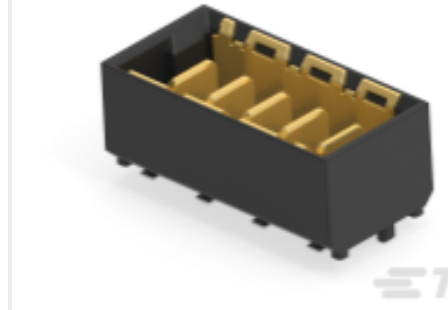

TE Part #214357-E
MSPPM 5 M SMD M1 * A V 137 094 * E008 J



TE Part #354175-E
MSPEED 50 F SMDTHR F4 B AB VV
137 094 *

TE Part #1116062-2
MJ,10MM,8P,BEZEL PNL TABS,SN

TE Part #1-1462051-6
HF3 52 = 50OHM 140MW 4.5V MONO

TE Part #2-1761679-3
IDC LOW PRO HDR 10P VERT BLUE

TE Part #2-1761679-9
IDC LOW PRO HDR 26P VERT BLUE

TE Part #4-2176337-4
CRGCQ 0402 39K 1%

Documents

Product Drawings

MSPEED 50 M SMDTHR * 90BE AB VV 137 094

English

CAD Files

Customer View Model

ENG_CVM_CVM_374722-E_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_374722-E_1.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_374722-E_1.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.